


50th CRAFTSMAN®
anniversary

Sears

1976 / 1977

POWER AND HAND TOOL CATALOG

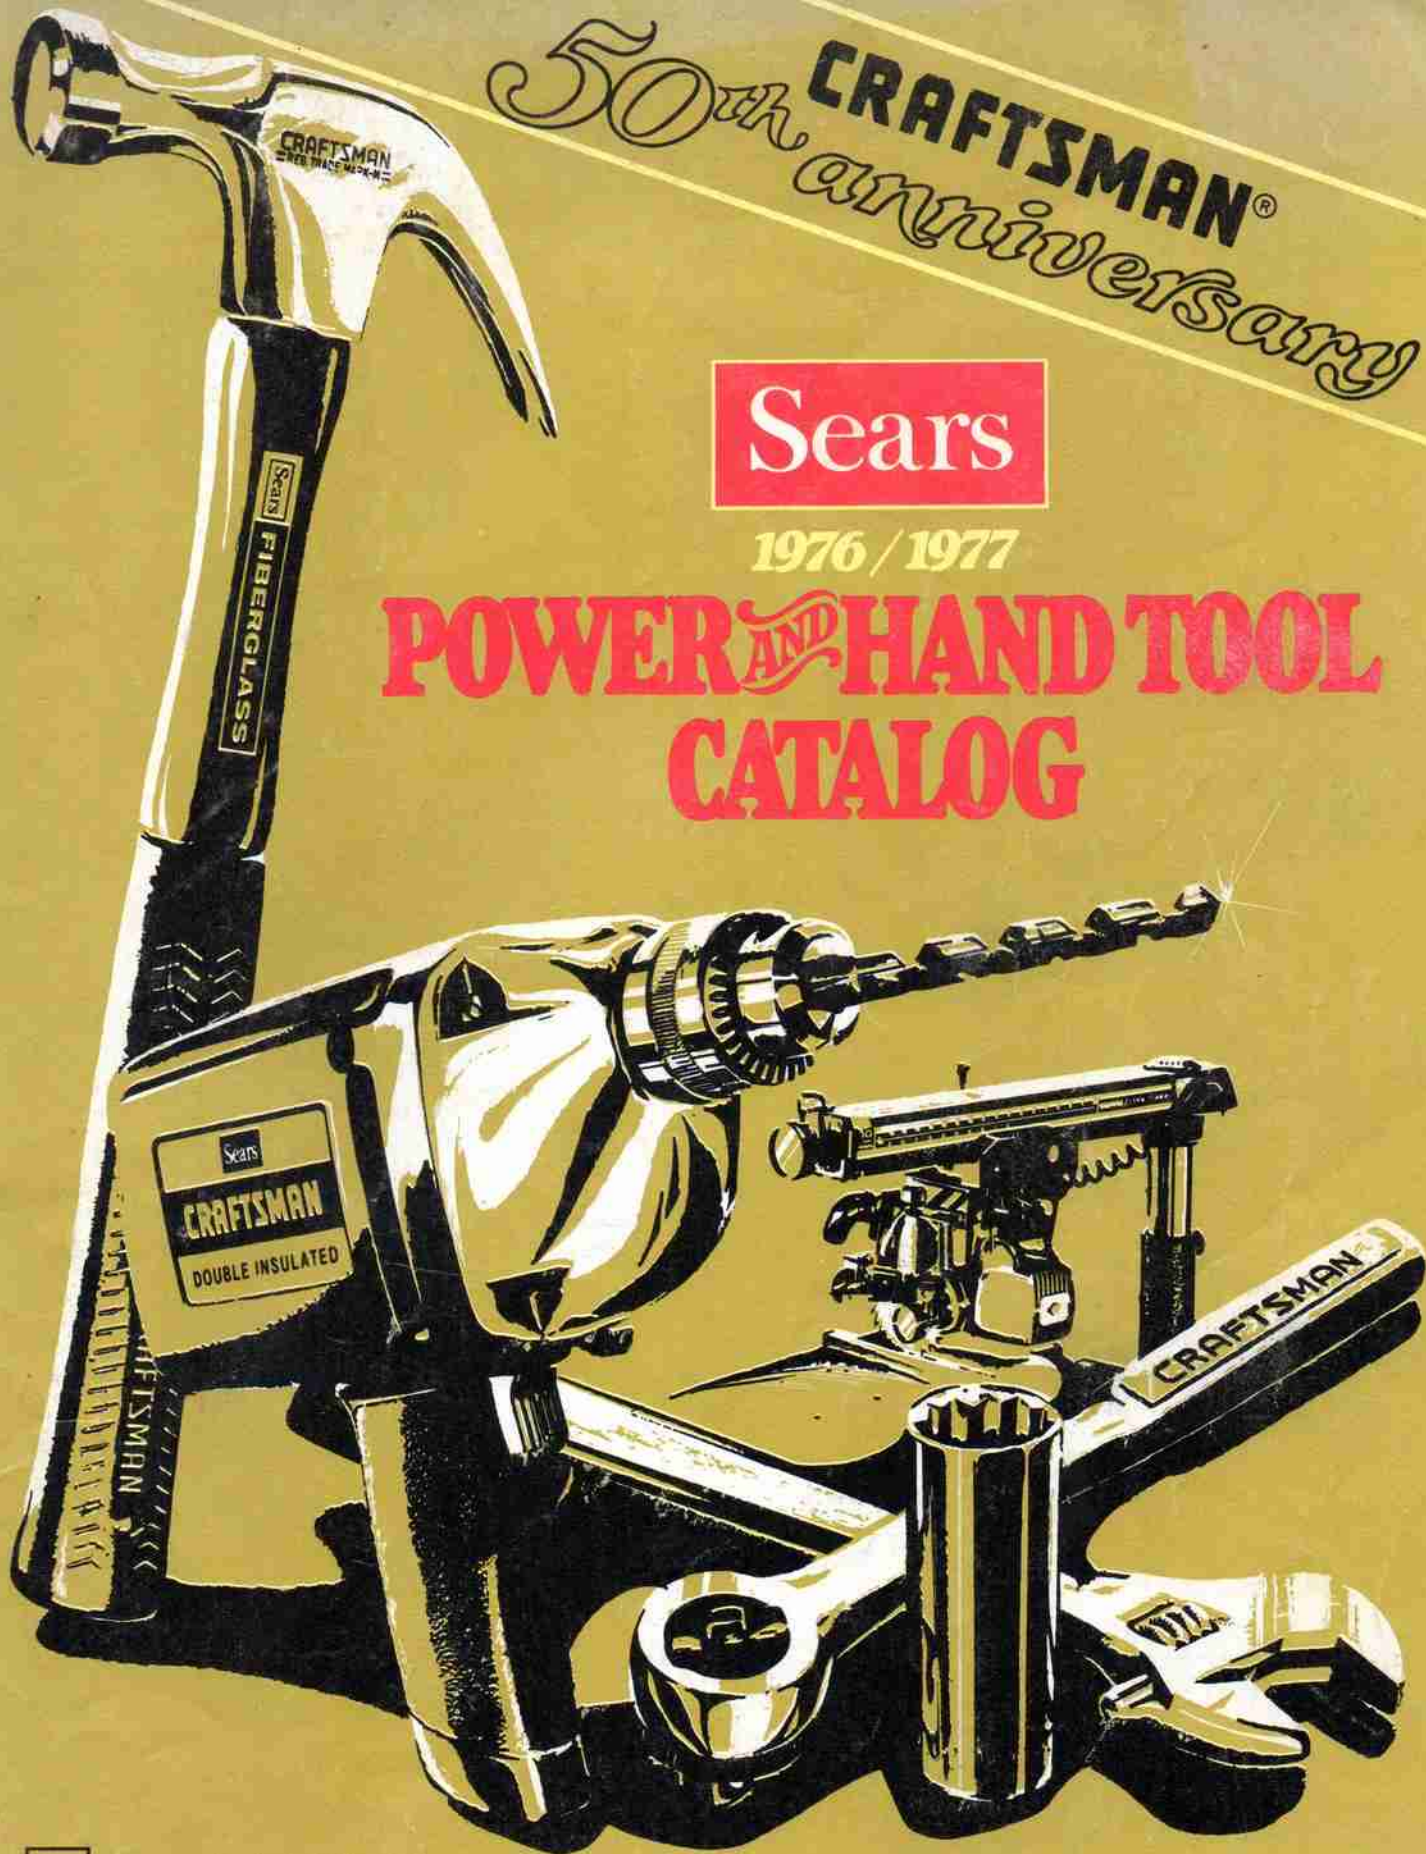

GT

Please mention the key-letter at left
when ordering by phone from this catalog

INDEX ON PAGE 93

Last date to order from this catalog is July 25, 1977

SEARS, ROEBUCK AND CO.

Satisfaction Guaranteed or Your Money Back

IT'S SO EASY TO SHOP BY PHONE
FROM ANY SEARS CATALOG

Just call Sears and say you want to place a catalog order


You can also apply by phone for a Sears Credit Card
to make Sears Catalog or Retail shopping easier yet

1976-77 marks the 50TH ANNIVERSARY of our famous CRAFTSMAN® Trademark!

We didn't achieve our 50-year success by chance . . . we built it
by making all of our finest-quality tools
earn the right to wear the name

CRAFTSMAN®

By sticking
to that principle for 50
years, we've not only created
a reputation for offering sensibly
priced tools backed by reliable
warranties, we've also developed new
ways to give you better value for your money

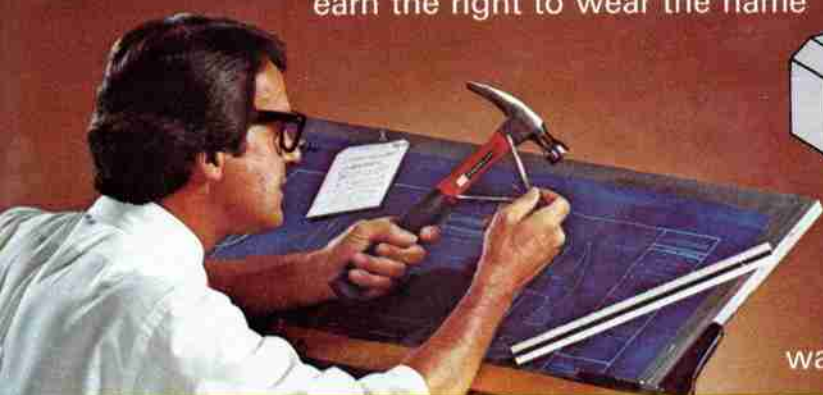

Even our basic CRAFTSMAN® Nail Hammer has benefited from at least 13 major innovations
. . . all engineered by our own manufacturer, all lab-tested for outstanding performance

① Exclusive Third Claw™, a "V"-shaped slot, lets you pull nails in tight corners where ordinary hammers are useless

② Increased sweep of claws provides more pulling power, plus claws will readily fit over 2x4's for tearing down old construction

③ Exclusive rib under each claw adds tremendous reinforcement. In our lab test, 6000 pounds of pressure could not break them

④ Increased neck length provides better hammer balance

⑤ Face precision-machined instead of ground by hand to provide perfect roundness

⑥ Uniform beveling all around face removes dangerous ledge of metal to help minimize the chance of chipping

⑦ Striking surface is slightly crowned (curved) to help you drive nails squarely and flush without marring

Complete Handle Selection: Choose Fiber Glass, Tubular Steel, Solid Steel or Wood

Fiber glass

⑧ Exclusive assembly process combines steel wedge with epoxy resin seal for head-to-handle tightness

⑨ Patented hollow core design lets us put more fiber glass in the eye and neck section where strength is needed. Also helps absorb shock, improves balance

Tubular Steel

⑩ Patented hickory plug extends way down into tubular handle for extra strength. This design also reduces shock and vibration

Solid Steel

⑪ Patented hickory plug in the eye section helps increase balance. This design also minimizes irritation from shock and vibrations

⑫ Patented air-pocket design between handle and grip also helps cushion the blow

Wood

⑬ Exclusive metal shield provides greater handle strength. Also helps prevent damage from overstrikes

Hammers sold on page 24

CRAFTSMAN HAMMER FULL UNLIMITED WARRANTY: If any Craftsman Hammer fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement

WE'VE GONE TO A LOT OF TROUBLE FOR A BASIC HAMMER, AND WE'VE
PACKED A LOT OF QUALITY INTO OUR POWER TOOLS, TOO

Make these cuts and more with accessories on the next 3 pages



Circular grooves...
Trammel Point

Edge grooves...
Edge Guide

Copy letters, designs...
Rout-A-Form

Mortise hinges...
Butt-hinge Template

Trim counter tops...
Laminate Trimmer

Turn wood...
Router-Crafter

Dovetail
Fixture



CRAFTSMAN®

**Heavy-duty 3/4-HP Router
with built-in spindle lock
and chip deflector**

\$54⁵⁰

MOTOR, BEARINGS: Motor develops maximum 3/4 HP. Shaft speed of 25,000 rpm. Accessible motor brushes for easy checking or replacement. 100% ball bearings for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-in. diameter shank bits. Built-in spindle lock for quicker, easier bit changes than with router below. Combination wrench for changing bits.

DEPTH GAUGE: Visual depth gauge graduated in 32nds of an inch for cuts to 1 1/2 inches deep.

HOUSING: Die-cast aluminum base and motor housing; high-impact polymer end cap and handles. Slide-action switch located on front of motor housing. Chip deflector eye shield lets you view work surface more clearly than with router below.

ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-v., 720-w., 60-Hz. AC. UL listed. With 6-ft., 2-wire neoprene cord.

ORDERING INFO: See Warranty on page 8. See safety note below right. 9 GT 1736—Shpg. wt. 8 lbs. ...\$54.50



CRAFTSMAN®

Medium-duty 1/2-HP Router

\$29⁵⁰

MOTOR, BEARINGS: Motor develops maximum 1/2 HP. Shaft speed of 25,000 rpm. Accessible motor brushes. 100% ball bearings for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-in. diam. shank bits. 2 wrenches. **DEPTH GAUGE:** Ring-type gauge graduated in 32nds-in. for cuts to 1 1/2 in. deep.

HOUSING: Die-cast aluminum base; glass reinforced polyester motor housing; high-impact polymer end cap and handles. Slide-action switch located on side of end cap.

ELECTRICAL INFORMATION: Double-insulated. 110-120-v., 520-w., 60-Hz. AC. UL listed. With 6-ft., 2-wire cord.

ORDERING INFO: See Warranty on page 8. 9 GT 1735—Shpg. wt. 6 lbs.\$29.50

1-HP ROUTER.. OUR MOST POWERFUL

Like all of our finest-quality tools,
it had to earn the right
to wear the name

CRAFTSMAN®



Here's what makes this router so outstanding:

- (A) Flat-top housing stays steady when you turn router over to change bits
- (B) Powerful 1-HP motor with 100% ball bearings for long, dependable service
- (C) Contoured handles with textured finish for positive grip
- (D) Non-glare satin finish on motor housing and base
- (E) Precision-ground thread on depth gauge for accurate height adjustment
- (F) Continuous 2-hand control... on/off switch located conveniently on handle
- (G) Zero reset feature on depth gauge for identical depth on repeat cuts
- (H) Self-extracting collet and spindle lock for easy bit changing
- (J) Smooth-gliding phenolic plastic sub-base won't mark wood the way metal bases can

\$74⁵⁰

MOTOR, BEARINGS: Motor develops maximum 1 HP. Shaft speed of 25,000 rpm. Accessible motor brushes for easy checking or replacement. 100% ball bearings for dependable service.

CHUCK: Self-extracting, collet-type chuck grips 1/4-inch diameter shank bits. Built-in spindle lock for quick, easy bit changes. With combination wrench for changing bits.

DEPTH GAUGE: Visual depth gauge with zero-reset feature... makes reset quicker, easier than with routers at left for getting identical depth on repeat cuts. Graduated in 64ths of an inch for cuts to 1 1/2 inches deep.

HOUSING: Die-cast aluminum base and motor housing; high-impact polymer end cap and handles. Trigger switch on handle. Chip deflector eye shield.

ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-v., 780-w., 60-Hz. AC. UL listed. With 6-foot, 2-wire neoprene cord with strain relief.

ORDERING INFORMATION: See Warranty, p. 8. 9 GT 1738—Shipping weight 8 lbs. 2 oz.\$74.50

Router as above, but without zero-reset feature on depth gauge.

ORDERING INFORMATION: See Warranty on page 8. See safety note below. 9 GT 1737—Shipping weight 8 lbs. 7 oz.\$64.99


SAFETY NOTE: Protect your eyesight... wear safety goggles when using power routers. See our complete selection on page 35.

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details

COMPARE
LAEJD **Sears** 3

High-speed Kromedge® Steel Router Bits

Kromedge® steel bits stay sharp up to 5 times longer than ordinary bits... steel surfaces fortified with chrome-nickel-molybdenum to make them hard... highly resistant to wear, abrasion, rust and gum build-up. Reduces friction, too. All with 1/4-inch shanks.

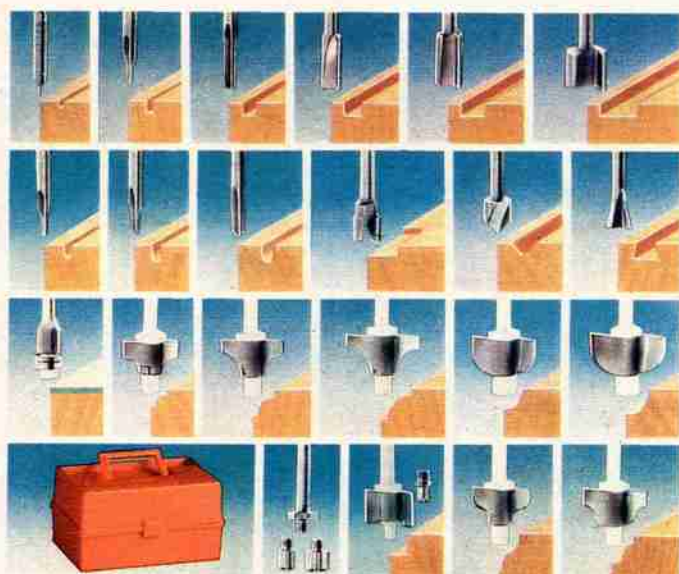


26-piece Router Bit Set includes 21 bits, arbor, 3 pilots plus case \$100.00

SET COMPOSITION: 1/16, 1/8, 1/4, 3/8, 1/2, 3/4-in. straight bits; 1/8, 3/16, 1/4-in. veining bits; 1/2-in. butt-hinge mortising bit; 1/2-in. V-groove bit; 1/2-in. dovetailing bit; carbide-tipped flush trimming (pilot ball bearing); 1/4, 3/8, 1/2-in. quarter round and beading bits; 3/8, 1/2-in. cove bits; rabbeting bit plus pilot (cuts 1/4, 3/8, 1/2-in. rabbets, 1 1/2-in. surface cuts); 3/16-in. ogee bit; 3/32-in. Roman ogee bit; 1/4-in. x 28-thread arbor plus 2 pilots. Plastic storage case.

ORDERING INFORMATION:

9 GT 25448—Shipping weight 2 pounds 9 ouncesSet \$100.00

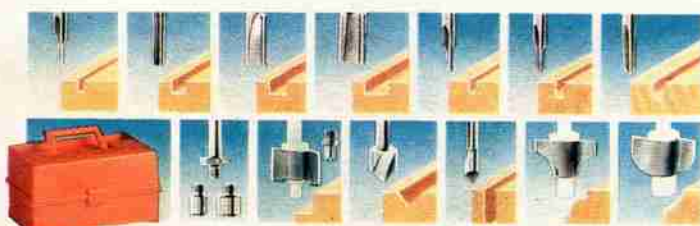


17-piece Router Bit Set includes 12 bits, arbor, 3 pilots plus case \$49.99

SET COMP: 1/8, 1/4, 3/8, 1/2-in. straight bits; 1/8, 3/16, 1/4-in. veining bits; rabbeting bit plus pilot (cuts 1/4, 3/8, 1/2-in. rabbets, 1 1/2-in. surface cuts); 1/2-in. V-groove bit; 1/4-in. combination panel bit; 3/8-in. quarter round, beading bit; 3/8-in. cove bit; 1/4-in. x 28-thread arbor plus 2 pilots. Plastic case.

ORDERING INFORMATION:

9 GT 25447—Shipping weight 2 pounds 2 ouncesSet \$49.99

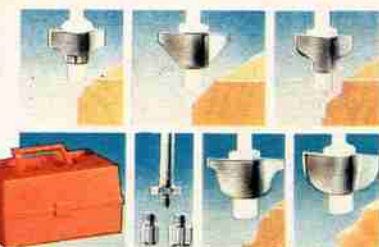

9-piece Router Bit Set Incl. 5 bits, arbor, 2 pilots, case \$29.99

SET COMPOSITION: 1/4-in. bead, quarter round bit; 1/2-in. 45° chamfering bit; 3/16-in. ogee bit; 1/4-in. Roman ogee bit; 1/2-in. cove bit; 1/4-in. x 28-thread arbor plus 2 pilots. Plastic case.

ORDER INFO: Indiv. piece prices total \$35.43. Wt. 1 lb. 6 oz.
9 GT 25424Set \$29.99



11-piece Router Bit Set Incl. 7 bits, arbor, 2 pilots, case \$24.99

SET COMPOSITION: 1/8, 3/8, 1/2-in. straight-face bits; 3/16, 1/2-in. veining bits; 1/2-in. V-groove chamfering bit; 1/2-in. bead and quarter round bit; 1/4-in. x 28-thread arbor plus 2 pilots. Plastic case.

ORDER INFO: Indiv. piece prices total \$27.62. Wt. 8 oz.
9 GT 25517Set \$24.99

Get more use from your router




New... our largest Router Bit Set has 39 pieces: 31 bits, 2 arbors, 5 pilots, case \$149.99

SET COMPOSITION: 1/8, 1/4, 3/8, 1/2, 3/4-in. straight-face bits; 1/8, 3/16, 3/32, 1/4-in. veining bits; 1/2-in. core box bit; 1/4, 1/2-in. dovetail cutters; 1/4-in. combination panel cutter; 1/2-in. hinge mortising bit; 1/2, 1/8-in. V-groove chamfer bits; 3/16-in. point cutting quarter round bit; double-end 45°, 60° V-groove bit; 1/4-in. combination straight, bevel bit for plastic laminates; 1/4, 3/8, 1/2-in. bead, quarter round bits; 1/2, 3/8-in. cove, chamfer bits; rabbet bit plus pilot (cuts 1/4, 3/8, 3/4-in. rabbets, 1 1/2-in. surface cuts); 3/32-in. point cutting ogee bit; 3/16-in. ogee bit; 3/32, 1/4-in. Roman ogee bits; 1/16-in. combination straight and veining bit, 45° chamfer bit; two 1/4-in. x 28-thread arbors plus 4 pilots.

ORDERING INFORMATION:

9 GT 25425—Plastic case. Shipping weight 2 pounds 3 ouncesSet \$149.99

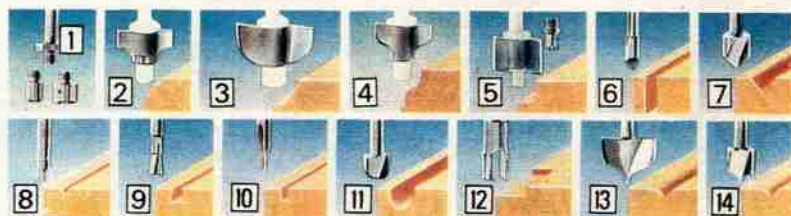

Individual Kromedge® Steel Router Bits

(1) 3-piece Arbor Set. 1/4-in. Use with bits (2, 3, 5, 14). 2 pilots.

ORDERING INFORMATION:

9 GT 25589—Shpg. wt. 3 oz.Set \$2.99

(2) Bead and Quarter-Round Bits.

SIZES. ORDER INFO: Wt. 3 oz.

9 GT 25563—1/4-in.\$4.49

9 GT 25562—3/8-in.4.99

9 GT 25561—1/2-in.5.49

(3) Cove, Chamfering Bit.

SIZES. ORDERING INFO: Wt. 3 oz.

9 GT 25571—1/2-in.\$4.99

9 GT 25572—3/8-in.4.49

9 GT 25589—45° chamfer bit4.99

(4) Ogee Bits. Wt. 3 oz. each.

SIZES AND ORDERING INFO:

9 GT 25585—3/16-in. Ogee\$5.99

9 GT 25587—3/32-in. Roman Ogee 5.99

9 GT 25588—1/4-in. Roman Ogee 6.99

(5) Rabbet Bit. Cuts 1/4, 3/8, 1/2-in. rabbets, 1 1/2-in. surface cuts. Incl. pilot.

ORDERING INFORMATION:

9 GT 25581—Shpg. wt. 3 oz.\$5.99

(6) Combination Panel Cutter.

SIZE AND ORDERING INFO:

9 GT 2554—1/4-in. Wt. 3 oz.\$3.49

(7) V-groove Chamfering Bit.

SIZES AND ORDERING INFO:

9 GT 2557—1/2-in. Wt. 3 oz.\$4.99

9 GT 25579—1/8-in. Wt. 3 oz.6.99

(8) Double-end straight/veining.

SIZE AND ORDERING INFO:

9 GT 25599—1/16-in. Wt. 3 oz.\$4.99

Double-end 45°, 60° V-groove.

ORDERING INFORMATION:

9 GT 25545—Shpg. wt. 3 oz.\$3.49

(9) Dovetail Cutter. Use with Dovetail Template on next page.

SIZES AND ORDERING INFO:

Shipping weight 3 ounces.

9 GT 2553—1/4-in.\$4.49

9 GT 25531—1/2-in.4.99

(10) Straight-face Bits.

SIZES AND ORDERING INFO:

Shipping weight 3 ounces.

9 GT 2552—1/8-in.\$1.99

9 GT 25521—1/4-in.2.29

9 GT 25522—3/8-in.2.99

9 GT 25523—1/2-in.3.49

9 GT 25529—3/4-in.5.49

Veining Bits.

SIZES AND ORDERING INFO:

9 GT 2559—1/8-in. Wt. 2 oz.\$2.49

9 GT 25592—3/16-in. Wt. 3 oz.2.69

9 GT 25593—1/32-in. Wt. 3 oz.2.99

9 GT 25594—1/4-in. Wt. 3 oz.3.49

(11) 1/2-in. Core Box Bit. 1/4-in. shank.

ORDERING INFORMATION:

Shipping weight 3 ounces.

9 GT 25596\$3.99

(12) 1/2-in. Hinge Mortising Bit. 1/4-in. shank. Use with Butt-Hinge Template on next page, former 9-2563C.

ORDERING INFORMATION:

9 GT 2555—Shpg. wt. 3 oz.\$3.49

(13) Point Cutting Ogee. 3/32-in. For roping, beading on Router-Crafter.

ORDERING INFORMATION:

9 GT 25583—Shpg. wt. 3 oz.\$5.99

(14) Point Cutting Quarter Round.


3/16-in. For beading, roping with Router-Crafter.

ORDERING INFORMATION:

9 GT 25567—Shpg. wt. 3 oz.\$4.49

Carbide-tipped Router Bits

Carbide Tips make these Steel Router Bits last 15 times longer in soft wood than bits at left. Extra-hard carbide tips brazed to these Kromedge® steel router bits with silver brazing alloy to make tips highly resistant to abrasion for long wear. All bits have 1/4-inch diameter shanks.

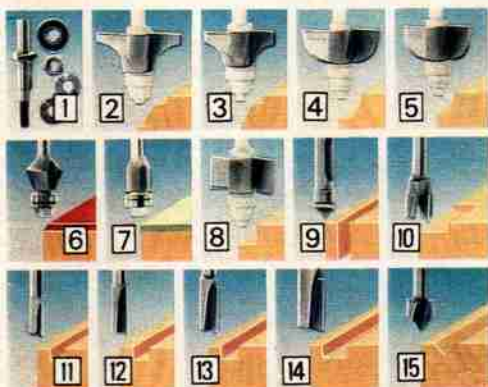

16-piece Router Bit Set

Includes 14 bits, arbor and case

\$135⁰⁰

SET COMPOSITION: One each of items (1) thru (16) listed below.

ORDER INFO: Separate prices total \$156.34.
9 GT 25417—Shpg. wt. 1 lb. 8 oz. . . . Set \$135.00

(1) **Arbor, 1/4-inch.** With 2 ball bearings (1/2 and 3/4-inch). For use with carbide bits.
ORDERING INFORMATION:
9 GT 25895—Wt. 3 oz. Set \$6.99

(2 and 3) **Bead and Quarter-round Bits.**
SIZES, ORDERING INFO: Wt. 3 oz. each.
(2) 9 GT 25565—1/2-in. \$14.49
(3) 9 GT 25566—3/4-in. 13.99

(4 and 5) **Cove, Chamfering Bit.**
SIZES, ORDERING INFO:
(4) 9 GT 25575—1/2-in. Wt. 4 oz. . . . \$14.99
(5) 9 GT 25576—3/4-in. Wt. 3 oz. . . . 13.99

(6) **22° Bevel Veneer Cutter.** 1/2-inch.
ORDERING INFORMATION:
9 GT 25412—Wt. 3 oz. \$10.99

(7) **Straight Veneer Trimmer.** 1/2-inch.
ORDERING INFORMATION:
9 GT 25413—Shpg. wt. 3 oz. \$10.99

(8) **Rabbit Bit.** 3/8-inch bit cuts 5/16-inch deep.
ORDERING INFORMATION:
9 GT 25582—Shpg. wt. 4 oz. \$13.99

(9) **Combination Panel Cutter.** 3/8-inch.
ORDERING INFORMATION:
9 GT 25541—Shpg. wt. 3 oz. \$5.99

(10) **Butt-Hinge Mortising Bit.** 1/2-inch.
ORDERING INFORMATION:
9 GT 25551—Shpg. wt. 3 oz. \$7.49

(11 thru 14) **Straight-face Single-flute Bits.**
SIZES, ORDERING INFO:
(11) 9 GT 25524—1/4-in. Wt. 3 oz. . . . \$5.99
(12) 9 GT 25525—3/8-in. Wt. 3 oz. . . . 6.49
(13) 9 GT 25526—1/2-in. Wt. 3 oz. . . . 6.99
(14) 9 GT 25527—3/4-in. Wt. 4 oz. . . . 7.99

(15) **V-groove Chamfering Bit.** 1/2-inch.
ORDERING INFORMATION:
9 GT 25578—Shpg. wt. 3 oz. \$9.99

(16) **Router Bit Case.** Slots for 44 bits. Plastic.
ORDERING INFORMATION:
9 GT 2558—Shipping weight 14 oz. . . . \$4.99

(17) **Template Set with letters and numbers.** Mortise figures 2 1/2 in. high. Includes all 26 alphabet letters, 9 numbers, 5 punctuation marks (40 plates total).

ORDERING INFORMATION: Use with bushings (22) sold below. Shipping weight 4 lbs. 9 oz.
9 GT 25182 Set \$9.99

Replacement Plates for set above. 40 plates.
ORDERING INFORMATION: Wt. 1 lb. 8 oz.
9 GT 25184 Set \$5.99

(18) **Router-A-Form Pantograph.** Make signs and decorations with a personal touch. Use with Sears routers to copy designs and handwriting. Makes wood engravings in 3 sizes as small as 1/2 size of original.

ACCESSORIES: 10 drawings, 10 numbers, 52 letters (26 each upper, lower case). Or use your own drawings.

ORDERING INFORMATION: Router not included. Sent unassembled.
9 GT 25183C—Shpg. wt. 4 lbs. \$10.99

(19) **Dovetail Joint Fixture.** Makes 1/2-in. cuts for flush and rabbeted dovetail joints. Use on stock up to 12 in. wide, 3/4 to 1 1/2 in. thick. Includes channel plate, plastic comb, clamps.

ORDERING INFO: Use with bit (9) sold on page 4, and bushings (22) sold below.
9 GT 2571—Shpg. wt. 6 lbs. 5 oz. . . . \$31.99

As above, except for use on stock 8 in. wide, 1/4 or 1/2 in. thick. Bushings included.

ORDERING INFO: Use with bit (9) sold on p. 4.
9 GT 2576—Shpg. wt. 2 lbs. 10 oz. . . \$21.99


1/4-inch Finger Template. Adapts fixture (19) above to make 1/4-inch dovetails.

ORDERING INFORMATION:
9 GT 2574—Shpg. wt. 2 lbs. 2 oz. . . . \$8.99

(20) **Steel Router Table.** Provides a stable work surface, makes edging operations easy. Fits all Sears routers except 9 GT 1735.

CONSTRUCTION: Heavy gauge steel.
DIMENSIONS: 14 7/8 x 16 3/4 x 11 inches high. Top 14 7/8 x 16 3/4 inches.

ORDERING INFORMATION: Sent unassembled. Router not included.
9 GT 25168—Shpg. wt. 8 lbs. 8 oz. . . \$16.99



(21) **Three-section Template Clamps plus Butt-Hinge Template.** Three-section template clamps guide router when mortising doors, jams. For square or round cornered hinges up to 5 in. long on 2 or 2-hinge doors to 7 ft. high, 3/4 to 2 1/2 in. thick. Butt-hinge template, set of two, 1 each for 3 1/2 and 4 inch hinges.

ORDERING INFO: Use with bushings (22) below.
9 GT 2564C—Shipping weight 11 lbs. Set \$49.99

Butt-Hinge Template alone. As described in (21) above. Set of 2.

ORDERING INFO: Use with bushings (22) below.
9 GT 2575—Shipping weight 1 pound . . Set \$5.99

(22) **Template Guide Bushings.** 3 black-oxide coated steel guides: 7/16, 1/2, 1 1/4-inch.

ORDERING INFO: Use with templates (17), (21), 9 GT 2575 and dovetail fixture (19) sold above.
9 GT 25069—Shipping weight 15 ounces . . \$5.99

(23) **Laminated plastic Trimmer.** Edges, bevels. Micrometer-type adjustment. Sub-base for mounting. With 1/4-in. straight, bevel-cut carbide-tip bit.

ORDERING INFORMATION:
9 GT 25732—Shipping weight 1 pound . . \$14.99

Extra 1/4-inch Bit. Fits (23). For plastic laminates.
9 GT 2541—Shipping weight 3 ounces . . \$5.49

SAFETY NOTE: Wear safety goggles . . see p. 35.

(24) **Trammel Point.** Makes 2 to 26-in. circle grooves. For routers on p. 3, former 9-2506, 9-2507.

ORDERING INFORMATION:
9 GT 25174—Shipping weight 13 ounces . . \$5.99

(25) **Sharpening Kit.** For steel and carbide-tipped router bits. Attaches to bottom of router.

ORDERING INFO: Router, bit not included.
9 GT 6650—Shpg. wt. 2 lbs. 10 oz. . . . Kit \$24.99

(26) **Router Bit Case.** Plastic. Holds 44 bits.
9 GT 2558—Shipping weight 14 oz. . . . \$4.99

(27) **CRAFTSMAN Face Shield.** Polycarbonate shield 8x11 1/2 in. Adjustable polyethylene head gear.

ORDERING INFORMATION:
9 GT 18613—Shipping weight 1 lb. 1 oz. . . \$5.79

(28) **Router Light.** Fits all routers on p. 3. Uses 2 "C" batteries (not included).

ORDERING INFORMATION:
9 GT 25176—Shipping weight 6 ounces . . \$5.99

(29) **Edge Guide.** For straight cuts with routers on p. 3, former 9-2506, 9-2507, 9-25066.

ORDERING INFORMATION:
9 GT 25172—Shipping weight 1 lb. 11 oz. . . \$5.99

Edge Guide as (29), but for straight or curved edges.

9 GT 25173—Shipping weight 2 pounds . . \$7.99

Want the intricate styling of turned wood that professionals get, but without years of practice?

This exclusive CRAFTSMAN® Router-Crafter

converts a router into a precision lathe for turning out fine wood pieces, without the bother of chisels or delicate measuring

Here's how it works:

- A** Mount work stock (up to 3 in. square, 36 in. long) between head and tailstock
- B** Attach router with 1/4-inch shank bit to sliding platform
- C** Set dial for uniform spacing lets you turn out duplicate pieces every time
- D** Crank handle to move router platform for lengthwise cuts

You can make cuts like these...



6-piece Bit Set for Router-Crafter



\$59.99 without router, bits

Only at Sears. Fashion distinctive furniture pieces using this lathe-like accessory with any Sears router, or with other routers that hold 1/4-inch shank bits. Recommended for use with routers over 1/2 HP.

CONSTRUCTION: Die-cast aluminum headstock, tailstock, platform. Chrome-plated steel tubes, crank. Steel cable. Screws for mounting router, instr.

DIMENSIONS: 45x8 1/2 x 7 inches high.

ORDERING INFO: Router not included... order separately on page 3. Wt. 9 oz. 9 GT 2525C... \$59.99

6-piece Bit Set for Router-Crafter. High-speed Kromedge® steel with 1/4-in. diameter shanks. Includes 3/32-in. point-cutting ogee bit, rabbet bit (cuts 1/4, 5/16, 3/8-in. rabbets, 15/16-in. surface cuts), 1/2-in. core box bit, 1/4-in. arbor, 2 pilots. Plastic case.

ORDERING INFO: Wt. 9 oz. Indiv. prices total \$18.96. 9 GT 25426... Set \$16.90

Wear safety goggles... see page 35.

Want the accuracy of a bench tool for straight cuts, fancy shaping or decorative edges?
Our new Heavy-duty Table holds your router or sabre saw steady... all you do is guide the workpiece



Heavy-duty Table **\$39.99** without router, bit

Our exclusive design die-cast aluminum top construction... stronger than ordinary stamped steel tables, plus miter gauge and hinged guard. Versatile... holds your router or sabre saw steady for edging or cutting. Fits all Sears routers and sabre saws.

CONSTRUCTION: Heavy-duty die-cast aluminum top with cast reinforcing ribs underneath. Ridges on top collect sawdust, avoid caking under workpiece. Fence positions adjust simply by unscrewing wingnuts and sliding into place. Fences have holes for attaching wood fences (not included). Heavy-gauge steel legs have holes for mounting on workbench.


MITER GAUGE: Use to guide workpiece over blade or bit at exact angle you set. Guided by 3/4-inch slot on table top.

HINGED GUARD: Covers moving blade or bit. Rides up over moving workpiece.

DIMENSIONS: 13 1/4 x 18 x 11 inches high overall. Table top measures 18 x 13 1/4 inches.

ORDERING INFORMATION: Router not included. Sent unassembled. Shipping weight 11 pounds 2 ounces. 9 GT 25444... \$39.99

Be sure to wear safety goggles... see page 35.

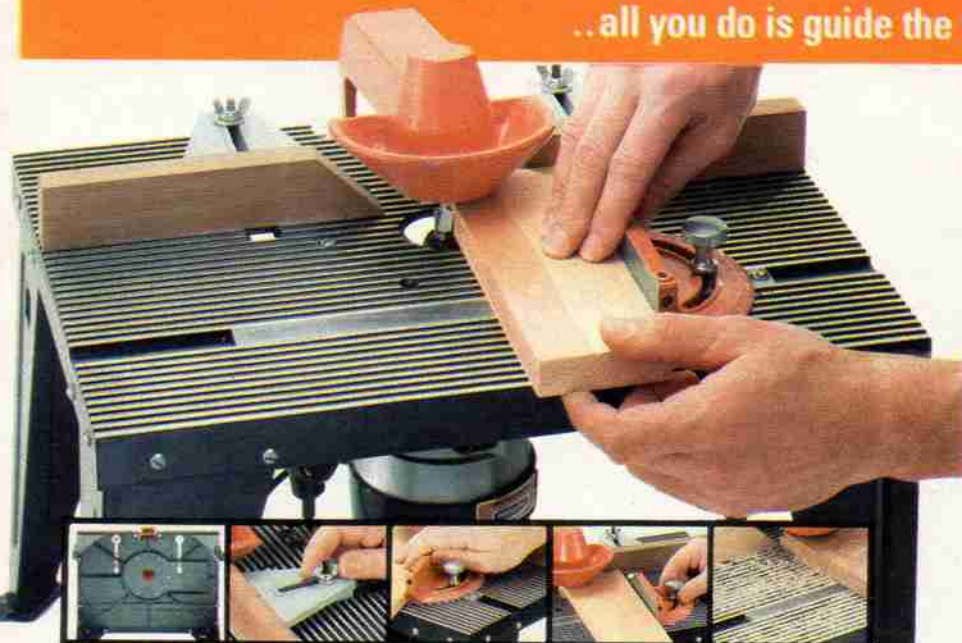

Cast reinforcing ribs under table top for sturdiness

Change fence positions quickly for different sized workpieces... just unscrew wingnuts

Guide workpiece over blade or bit at exact angle you set on miter gauge

Hinged guard covers moving blade or bit, moves up as you push workpiece thru

Ridges on table top let sawdust collect, not clump, so workpiece glides level over top

6 Sears COMPBK LAEGJ02

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

CRAFTSMAN® Reciprocating Saw

It's powerful enough to cut not only wood, but also solid aluminum 2 inches thick and cast iron 1 inch thick



Remodeling? Rough-cut 2x4's quickly before exact cut

Adding windows, vents, outlets? Use this saw to start hole, then rough-cut to shape

Want to cut flush to floor or wall? Just change blade and rotate blade clamp

Wear safety goggles . . . see page 35.
Carrying case sold on page 21.

Cuts logs up to a foot thick with blade (5)

\$59⁵⁰

- Develops maximum 1/2 HP
- Long, 1 1/4-inch blade stroke
- Trigger-controlled variable-speed from 0 to 2000 strokes per minute (spm)

MOTOR, BEARINGS: Variable-speed motor develops maximum 1/2 HP. Trigger controls no-load cutting speed up to 2000 spm. 1 1/4-in. stroke. Precision steel helical gears. 100% ball bearings.

HOUSING: High-impact polymer motor housing, assist handle; aluminum motor frame. Blade clamp rotates. 1/2-in. steel shank.

ELECTRICAL INFO: Double insulated so it needs no grounding. 110-120-v., 60 Hz. AC. 456-w. UL listed. 6-ft., 2-wire neoprene cord.

ACCESSORIES: Comes complete with 3 blades, wrench.

ORDERING INFORMATION: See warranty on page 8.
9 GT 1706—Shipping weight 9 pounds 12 ounces \$59.50

Single-speed, 1/2 HP Saw (not shown)

MOTOR, BEARINGS: Single-speed motor . . . no-load speed of 2400 spm. 1-in. stroke. Precision steel helical gears. 100% ball bearings.

HOUSING: High-impact polymer motor housing, assist handle; aluminum motor frame. 1/2-in. steel shank. Blade clamp rotates.

ELECTRICAL INFORMATION: As above, except 432 watts.

ACCESSORIES: Comes complete with 3 blades and wrench.

ORDERING INFORMATION: See warranty on page 8.
9 GT 1703—Shipping weight 9 pounds 12 ounces \$47.50

(1 thru 5) CRAFTSMAN Reciprocating Saw Blades.

Blades (1 thru 3) and (5) fit CRAFTSMAN, Black and Decker, Milwaukee, Pennacraft, Powr-Kraft, Skil, Shopmate and Stanley reciprocating saws. Blade (4) fits CRAFTSMAN only.

SIZES, USES, ORDERING INFORMATION:

Item	Catalog Number	Length inches	Teeth per in.	Uses	Wt. each	Each	Five for
(1)	9 GT 28681	6	7	Smooth cuts wood, plastic, comp. board; plunge, scroll cuts	3 oz.	79c	\$3.70
(2)	9 GT 28682	9	3	Fast, rough cuts in wood over 1 inch thick	4 oz.	\$1.19	5.85
(3)	9 GT 28683	6	24	Steel, other metals up to 2 inches thick	3 oz.	99c	4.70
(4)	9 GT 28684	6	7	Flush cuts wood, plastic, nails	3 oz.	99c	4.70
(5)	9 GT 28685	12	7	Smooth, deep cuts through wood, plastic, composition board, hard-board; scroll cuts	4 oz.	\$1.49	7.15

Package of 5 Blades. One each of (1) thru (5).

9 GT 28688—Shipping weight 11 ounces Package \$4.99



CRAFTSMAN® Power Planer

Cuts fast, smooth and wide so you can get professional-looking results, make fewer passes than with standard-width planes

\$74⁵⁰

MOTOR AND BEARINGS: Develops maximum 3/4 HP . . . no-load speed of 15,000 rpm. Easily accessible motor brushes. Non-slip timing belt. 100% ball bearings.

HOUSING, CUTTER: Non-glare, die-cast aluminum base. Thermoset polyester housing, high-impact polymer handles. Clog-free chip chute deflects shavings away from you. Easy-to-read precision scale . . . turn knob to set cutting depth. Plane, size, bevel. Twin tungsten blades on a super-wide 3.62-in. rotary cutter. Trigger switch. Blades remove easily for sharpening.

ACCESSORIES: Includes 90° guide for accurate sizing . . . makes rabbeting path 1 5/64 of an in. deep, 1 1/32 of an in. wide. Wrench and blade setting guide.

ELECTRICAL INFORMATION: Double-insulated . . . needs no grounding. 6-foot, 2-wire neoprene cord. 110-120-v., 60-Hz. AC. 540 w. UL listed.

ORDERING INFORMATION: See warranty on page 8. Extra blades sold below.
9 GT 1732—Shipping weight 10 lbs. 7 oz. \$74.50

Set of 2 extra Blades for Planer above.

9 GT 17325—Shipping weight 6 ounces Set \$12.99

Wear safety goggles . . . see page 35. Carrying case sold on page 21.

Planes level surfaces uniformly . . . set dial for thick or thin shavings	Cuts a 3 5/8-in. path . . . wide enough to plane the broad side of a 2x4 in one pass	Razor-sharp blades spin at 15,000 rpm . . . even slice clean through tough end grains	Bevels edges . . . grooved base plate guides planer for a uniform 45° cut	Makes rabbet cuts . . . one pass cuts 1 5/64 in. deep, 1 1/32 in. wide



Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

COMPK LAEGJD **Sears** 7

CRAFTSMAN® 4-inch Plywood-cutting Saw

\$39.00

- No-load speed of 7000 rpm
- 100% ball and roller bearings
- Precision helical gearing

Lightweight, high speed, compact design, rack and pinion depth adjustment . . . all make this saw a specialist in cutting paneling, plywood, trim

MOTOR, BEARINGS, GEARS: Motor develops maximum $\frac{3}{8}$ HP with an extra-fast no-load speed of 7000 rpm. Permanently lubricated ball and roller bearings. Precision helical gearing. Externally accessible motor brushes . . . spring-loaded to pop out for easy checking.

BLADE, CUTTING DEPTH: Includes 4-inch Kromedge® plytooth blade . . . cuts depths up to $\frac{3}{8}$ -inch at 90°. Rack and pinion depth adjustment. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. High-impact polymer motor housing, handle and built-in auxiliary grip that provides for firm, 2-hand control. Steel wrap-around base. Sawdust blower.

ELECTRICAL INFORMATION: Double-insulated. 110-120-v., 720 w., 60-Hz. AC. UL listed. 6-foot, 2-wire neoprene cord.

ORDERING INFORMATION: See Warranty at top of page, safety note below, 9 GT 1189—Shipping weight 9 pounds 12 ounces . . . \$39.00

Play it safe!

Wear protective goggles or glasses when using saws on these 2 pages. See safety equipment, page 35.

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

(1 thru 6) CRAFTSMAN® Kromedge® Specialty Blades

CONSTRUCTION: Made of chrome-nickel-molybdenum steel, an alloy with ability to stay tough, hold a keen cutting edge. Chrome-plated to resist rust, pitch build-up. Fit all circular saws on these 2 pgs. except (9 GT 32401, 9 GT 32441) for panel saw above, (9 GT 32432) for table saws. *Protect your eyes; wear safety goggles.*

(1) 7-in. Cabinetwork Combination Blade

52 teeth. For satin-smooth rips, crosscuts, miters in hard or soft woods veneers. For 7 thru 10-in. table, electric hand saws, $\frac{5}{8}$ -in. arbors.

ORDER INFO: Wt. 12 oz. 9 GT 32433 . . . \$3.99

(2) 10-in. Blade . . . as above except 72 teeth. Wt. 2 lbs. 9 GT 32434 . . . \$5.99

(3) 6-in. Master Combination Blade

48 teeth. For fast, precise, smooth miters, crosscuts in hard or soft woods, rips in furniture stock. Expansion slots. For $\frac{3}{8}$ to $\frac{1}{2}$ -in. arbors, 5080-7640 rpm.

ORDER INFO: Wt. 9 oz. 9 GT 32491 . . . \$2.99

(4) 4-in. Chisel-tooth Blade

30 teeth. For all-purpose sawing: crosscuts, rips, miters in hard or soft woods. For $\frac{1}{2}$ to $\frac{3}{8}$ -inch arbors.

ORDER INFO: Wt. 4 oz. 9 GT 32401 . . . \$1.99

(5) 4-inch Crosscut Plywood Blade

100 teeth. For fine-finish work in plywood, fiberboard woods, veneers. For $\frac{1}{2}$ -in. arbors or $\frac{1}{4}$ in. electric drill attachments.

ORDERING INFO: Shipping weight 5 ounces. 9 GT 32441 . . . \$1.99

(6) 6½-in. Non-ferrous Metal-cutting Blade

80 teeth. Cuts copper, brass and aluminum. Use with circular saws only. For $\frac{3}{8}$ to $\frac{1}{2}$ -in. arbors.

ORDERING INFO: Shipping weight 10 oz. 9 GT 32505 . . . \$5.99

(7) 6½-inch Steel-slicer Blade


Cuts by friction . . . with deep expansion slots. For metal up to $\frac{3}{8}$ -in. thick; cuts roofing, iron, pipe and bar stock. *Not for wood or non-ferrous metals; use with circular saws only.* For $\frac{3}{8}$ to $\frac{1}{2}$ -in. arbors.

ORDERING INFO: Shipping weight 10 oz. 9 GT 32507 . . . \$4.49

For home or profession,

CRAFTSMAN® FULL ONE-YEAR WARRANTY ON PORTABLE ELECTRIC TOOLS

If any CRAFTSMAN Portable Electric Tool fails to give complete satisfaction within one year from date of purchase, return it to any Sears store throughout the United States and it will be replaced free of charge.

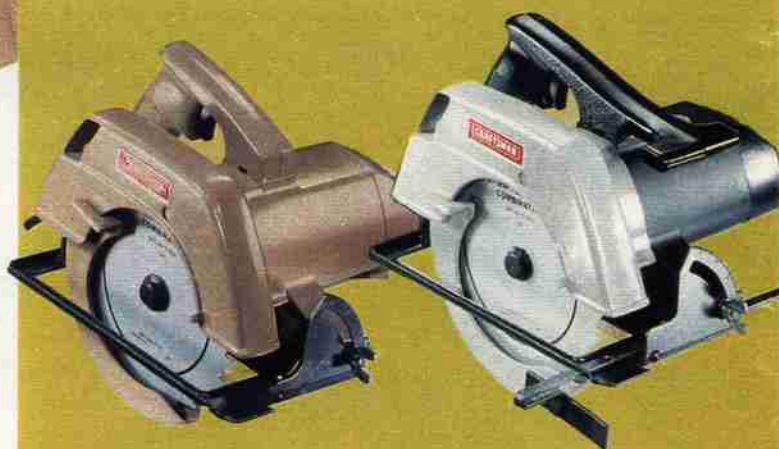

7-inch 1 1/4-HP Saw \$22.50

- No-load speed of 5000 rpm
- Sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops maximum $1\frac{1}{4}$ HP (5000 rpm). Permanently lubricated sleeve bearings. Spur gearing. Accessible motor brushes . . . spring loaded for easy checking.

BLADE, CUTTING DEPTH: With 7-in. combination blade . . . cuts wood up to $2\frac{3}{16}$ -in. thick at 90°, up to $1\frac{13}{16}$ -in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Blade, wrench. **ELECTRICAL INFO:** Double-insulated. 110-120-v., 720 w., 60-Hz. AC. UL listed. 6-ft., 2-wire cord.

ORDER INFO: See Warranty above, safety note at left. Wt. 11 lbs. 6 oz. 9 GT 1180 . . . \$22.50

Rip Guide for 9 GT 1180 above.

ORDERING INFO: Wt. 10 oz. 9 GT 27679 . . . \$1.99

7-inch 1 3/4-HP Saw \$44.99

- No-load speed of 5200 rpm
- Ball and sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops max. $1\frac{3}{4}$ HP (5200 rpm). Permanently lubricated ball and sleeve bearings. Spur gearing. Accessible motor brushes . . . spring-loaded, pop out for checking.

BLADE, CUTTING DEPTH: With 7-in. combination blade . . . cuts wood up to $2\frac{3}{16}$ inches thick at 90°, up to $1\frac{13}{16}$ inches thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards. Thermoset polyester motor housing. High-impact polymer handle and auxiliary grip that provides firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Includes blade, wrench, rip guide with $\frac{3}{4}$ -in. face. **ELECTRICAL INFO:** Double-insulated. 110-120-v., 1020 w., 60-Hz. AC. UL listed. 6-ft., 2-wire cord.


ORDER INFO: See Warranty above, safety note at left. Wt. 11 lbs. 6 oz. 9 GT 1082 . . . \$44.99

(7 thru 9) Circular Saw Accessories

(7) **CRAFTSMAN Miter Arm** converts circular saw into radial arm saw. Saw (not incl.) glides on steel guide rails for straight or angle cuts up to 45° right or left; rule shows degree marks. Acts as guide for dado, rabbet cuts (*require dado set sold on p. 113). Holds work for all saw cuts . . . capacity for lumber up to 2x12 in.; ideal for thin work such as shingles, hardboard. Incl. chip-board table (unassembled). Fits CRAFTSMAN saws (except 9 GT 1188C, former 9-1187C, 9-2789), most saws with 6-in. or smaller base. **ORDER INFO:** See "N" note, p. 92. Wt. 22 lbs. 9 GT 17151N . . . \$34.99

(8) **Gear Lubricant** compounded to help keep your electric tools working smoothly. 4-oz. tube. **ORDERING INFO:** Shpg. wt. 9 oz. 9 GT 2593 . . . Tube \$1.49

(9) **Portable Saw Guide** helps make angle cuts with your portable electric hand saw. Adjusts 0° to 72° right or left. Steel. **ORDERING INFO:** Shpg. wt. 2 lbs. 4 oz. 9 GT 1719 . . . \$4.99

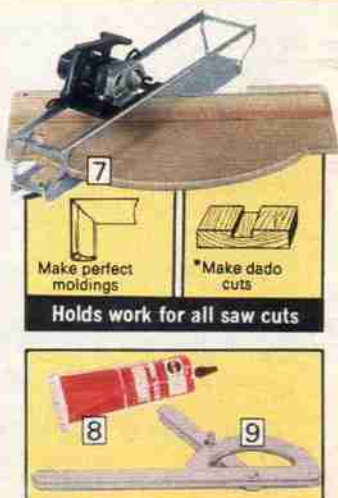

8 Sears CRAFTSMAN LAEGD

Sears has the CRAFTSMAN® Circular Saw for your needs

Here are just a few of the good reasons for owning one:



Each saw does bevel, miter cuts . . . combines both to do compound cuts. Easy-view blade port lets you keep eye on cutting line



Each saw has an anti-kickback clutch . . . if blade binds, clutch automatically releases tension to prevent saw from jumping back at you



Each saw has spring-loaded, accessible motor brushes for easy checking. All bearings are permanently lubricated



7 1/4-inch 1 3/4-HP Saw \$49⁹⁹

- No-load speed of 5200 rpm
- Ball and sleeve bearings
- Spur gearing

MOTOR, BEARINGS, GEARS: Develops maximum 1 3/4 HP (5200 rpm). Permanently lubricated ball and sleeve bearings. Spur gearing. Accessible motor brushes . . . spring-loaded to pop out for easy checking.

BLADE, CUTTING DEPTH: With 7 1/4-inch chisel-tooth Kromedge® blade . . . cuts wood up to 2 3/8 in. thick at 90°, up to 1 1/2 in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards.

Thermoset polyester motor housing. High-impact polymer handle, auxiliary grip for firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Includes blade, wrench, rip guide with 4-in. face.

ELECTRICAL INFO: Double-insulated. 110-120-v., 1140 w., 60-Hz. AC. UL listed. 6-ft., 2-wire cord.

ORDERING INFO: See Warranty, safety note on facing page.

Shipping weight 11 lbs. 4 oz.
9 GT 1085 \$49.99



7 1/4-inch 2-HP Saw \$64⁵⁰

- No-load speed of 5400 rpm
- Ball and roller bearings
- Precision helical gearing

MOTOR, BEARINGS, GEARS: Develops maximum 2 HP (5400 rpm). Permanently lubricated ball and roller bearings. Helical gearing. Externally accessible motor brushes . . . spring-loaded to pop out for easy checking.

BLADE, CUTTING DEPTH: With 7 1/4-inch combination Kromedge® blade . . . cuts wood up to 2 3/4 in. thick at 90°, up to 1 1/2 in. thick at 45°. External blade clutch.

HOUSING: Die-cast aluminum gear housing, blade and swing guards.

Thermoset polyester motor housing. High-impact polymer handle and auxiliary grip that provides firm, 2-hand control. Steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Includes blade, wrench, rip guide with 4-in. face.

ELECTRICAL INFO: Double-insulated. 110-120-v., 1320 w., 60-Hz. AC. UL listed. 6-ft., 2-wire neoprene cord.

ORDER INFO: See Warranty, safety note on facing page. Wt. 11 lbs. 12 oz.
9 GT 1086 \$64.50



7 1/2-inch, 2 1/8-HP Saw \$94⁵⁰

- No-load speed of 5500 rpm
- Ball and roller bearings
- Precision helical gearing
- RIVING KNIFE trails behind blade to guard against binding
- ELECTRONIC BRAKE brings blade to a halt as soon as you release the trigger. Imagine a blade spinning at more than 100 m.p.h. yet you can stop it in less than half of a second and put the saw down

MOTOR, BEARINGS, GEARS: Develops maximum 2 1/8 HP (5500 rpm). Permanently lubricated ball and roller bearings. Helical gearing. Electronic brake provides instantaneous blade control. Externally accessible spring-loaded motor brushes for easy checking.

BLADE, CUTTING DEPTH: With 7 1/2-in. combination Kromedge® blade . . . cuts wood up to 2 3/8 in. thick at 90°, up to 2 3/16 in. thick at 45°. Easy-to-read vertical scales show cutting depth in 1/16ths of an in., bevel angles in degrees. Riving knife trails blade. External blade clutch.

HOUSING: Die-cast aluminum gear and motor housings, blade and swing guards . . . with non-glare satin finish. Thermoset polyester handle and auxiliary grip that provides firm, 2-hand control. Two-piece steel wrap-around base with depth adjustment. Sawdust blower.

ACCESSORIES: Includes blade, wrench, rip guide with 4-inch face.

ELECTRICAL INFORMATION: Double-insulated. 110-120-v., 1440 w., 60-Hz. AC. UL listed. 6-foot, 2-wire neoprene cord with bend relief.

ORDERING INFORMATION: See Warranty, safety note on facing page.
9 GT 1188C—Shipping weight 20 pounds \$94.50



SKILSAW® with WORM DRIVE . . the toughest, most durable gearing available

Worm drive gearing is unsurpassed in torque and the ability to handle severe shock loads . . . stands up to wood, metal, stone, any tough composition materials of today

- 100% ball bearing motor develops maximum 2-HP
- 7 1/4-inch blade moves at a no-load speed of 4400 rpm

\$134⁷⁷



Designed to handle demanding treatment of construction and industry professionals.

MOTOR, BEARINGS, GEARS: Develops maximum 2-HP (4400 rpm). 100% ball bearings. High-torque worm-drive gearing. Externally accessible spring-loaded motor brushes for easy checking.

BLADE, CUTTING DEPTH: With 7 1/4-inch combination blade . . . cuts wood up to 2 3/4 in. thick at 90°, up to 1 1/2 in. thick at 45°. With proper blades, cuts metal, stone. With Skil® diamond arbor blade.

HOUSING: Die-cast aluminum gear and motor housings, blade and swing guards, handles . . . with non-glare satin finish. Two handles for firm control. One-piece wrap-around base with depth adjustment.

ACCESSORIES: Includes blade, wrench.

ELECTRICAL INFORMATION: 110-120-v., 1560 w., 60-Hz. AC. UL listed. Eight-foot, 16-gauge, 3-wire rubber cord with strain relief.

ORDERING INFO: See safety note on facing page.
9 GT 1077C—Shipping weight 21 pounds \$134.77



SABRE SAWS WITH AUTOMATIC SCROLLING


Like all of our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these Saws so outstanding:

Exclusive automatic scrolling means all you do is guide saw. Blade pivots on its own to follow even the most intricate lines of cut... you never need to turn the saw.

- (A) Guide saw forward, blade follows cutting line
- (B) Slide saw to the right, blade pivots right to cut
- (C) Pull saw backward, blade pivots to the rear

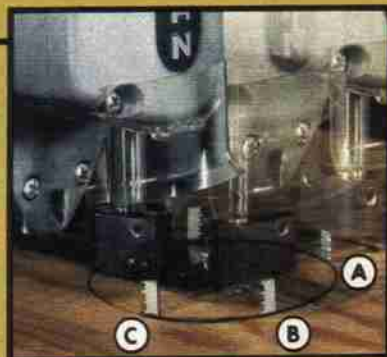

Scrollers on this page are some of the most versatile saws you can buy. Here are some reasons why:



CRAFTSMAN® 1/2-HP Manual Scroll Saw

Turn knob to guide blade and cut designs

\$44.50

- Trigger-controlled variable speeds
- Cuts with 3/8-inch blade stroke
- Ball and sleeve bearings



Manually-controlled scrolling mechanism lets you cut intricate designs.

MOTOR, BEARINGS: Develops maximum 1/2 HP. Trigger-controlled variable no-load speeds of 0 to 3600 strokes per minute... with 3/8-inch blade stroke. Ball and sleeve bearings.

HOUSING: Heat-resistant thermoset polyester. Counterbalance design smooths out vibration, helps reduce operator fatigue. Steel base tilts 45° left or right for bevel cutting. Built-in sawdust blower keeps cutting line clear.

ELECTRICAL INFORMATION: Double-insulated... needs no grounding. 110-120-v., 60-Hz. AC. 290 w. UL listed. 6-foot, 2-wire cord.

ACCESSORIES: Includes Super-fine Finishing Blade, circle-cutting edge guide attachment.

ORDERING INFORMATION: See Warranty, page 8. 9 GT 1072—Shpg. wt. 5 lbs. 10 oz. \$44.50



*Sears * Best*

1/2-HP Automatic Scroll Saw

1/2-HP Automatic Scroll Saw

- Trigger controlled variable plus 12 pre-set speeds
- Cuts with 1-inch blade stroke
- Ball and roller bearings

\$69.50

- Trigger-controlled variable speeds
- Cuts with 3/4-in. stroke
- Ball and sleeve bearings

\$54.50

(1 and 3) Auto-scrolling mechanism permits accurate cuts in almost any design.

HOUSING: Heat-resistant thermoset polyester motor housing, high-impact polymer handle. Motor brushes externally accessible for easy checking. Counterbalance design smooths out vibration, reduces operator fatigue. Steel base tilts up to 45° right or left for bevel cuts; 1-inch bevel quadrant. Steel saw bar swivels a full 360°. Blade chuck even holds broken blades. Built-in sawdust blower keeps cutting line clear.

ACCESSORIES: Includes Super-fine Finishing Blade, circle-cutting edge guide attachment.

ELECTRICAL INFORMATION: Double-insulated... needs no grounding. 110-120-volts, 60-Hz. AC. UL listed. 6-foot, 2-wire neoprene cord.

(1) 1/2-HP Automatic Scroll Saw. Sectional, non-glare aluminum gear housing. With protective blade chip shield. **MOTOR, BEARINGS:** Develops maximum 1/2 HP. Trigger-controlled variable no load speeds of 1300 to 2700 strokes per minute... trigger locks for speed consistency. Also rear-mounted control dial with 12 pre-set blade speeds. One-inch stroke with feedback circuitry that helps keep blade speed consistent. 100% ball bearing motor. Runs on 420 watts.

ORDERING INFORMATION: See Warranty, page 8. 9 GT 1728—Shipping weight 9 pounds 4 ounces \$69.50

(2) Side Cutter Attachment. For flush wall cuts.

ORDERING INFO: Fits 9 GT 1728 above, former 9-1726. 9 GT 2715—Shipping weight 6 ounces \$5.99

(3) 1/2-HP Automatic Scroll Saw. Sectional, polished aluminum gear housing.

MOTOR, BEARINGS: Motor develops maximum 1/2 HP. Pull trigger to control variable no-load speeds of 0 to 3200 strokes per minute... with 3/4-inch long blade cutting stroke. Ball and sleeve bearings. 336 watts.

ORDERING INFORMATION: See Warranty on page 8. Shipping wt. 6 lbs. 10 oz.

9 GT 17251 \$54.50



Scroll and Sabre Saw Accessories

(4) Sabre Saw Converta-Table. Lets you convert your sabre saw to a table saw. Cast aluminum top.

ORDER INFO: See page 6 for detailed description. 9 GT 25444—Shpg. wt. 11 lbs. 2 oz. \$39.99

(5) Sabre Saw Table. For cutting small wood parts. Stamped steel... 14"x16"x11 inches high.

ORDERING INFORMATION: Sent unassembled. 9 GT 17416—Shpg. wt. 8 lbs. 8 oz. \$14.99

(6) Circle-cutting Edge-guide. Use with scroll, sabre saws these 2 pgs. to cut curves, lines, circles.

ORDERING INFORMATION: 9 GT 27959—Shpg. wt. 10 oz. \$2.99

(7) Holder for extra blades, drill bits. Attaches to power cord.

ORDERING INFORMATION: 9 GT 2871—Shpg. wt. 4 oz. 99c

(8) Light Attachment. Mounts to any sabre saw on these 2 pages. Independent switch.

ORDER INFO: Uses 2 "C" batteries (not incl.). 9 GT 25176—Shpg. wt. 6 oz. \$5.99

(1 thru 4) CRAFTSMAN® Sabre Saws

Our sabre saws start their own cuts . . . no pre-drilling necessary. Bearings are permanently lubricated. Bases tilt 45° right or left. Each has a built-in sawdust blower to keep cutting line clear; each includes a Super-fine Finishing Blade. ELECTRICAL INFORMATION: Double-insulated . . . no grounding needed. 110-120-v., 60-Hz. AC UL listed. Each with 6-ft., 2-wire cord.

(1) Variable-speed, develops 1/4 HP \$34.99

MOTOR, BEARINGS: Develops maximum 1/4 HP. Trigger-controlled variable no-load speeds 0 to 3600 strokes per min. . . 3/8-in. blade stroke; 1-inch bevel quadrant. With trigger lock. Ball and sleeve bearings. Externally accessible motor brushes for easy checking. 288 watts.

HOUSING: Thermoset polyester gear and motor housings, high-impact polymer handle. Cord with 1-inch bend relief. Also includes edge guide and circle cutting attachment.

ORDERING INFO: See Warranty on page 8.
9 GT 1070—Shpg. wt. 5 lbs. 10 oz. \$34.99

(2) Variable-speed, develops 1/2 HP \$29.99

MOTOR, BEARINGS: Develops maximum 1/2 HP. Slide switch-controlled variable no-load speeds 0 to 3200 strokes per min. . . 1/2-in. blade stroke; 1-inch bevel quadrant. Sleeve bearings. 264 watts.

HOUSING: High-impact polymer. Also includes edge guide.

ORDERING INFO: See Warranty on page 8.
9 GT 17215—Shpg. wt. 4 lbs. 13 oz. \$29.99

(3) Two-speed, develops 1/2 HP \$14.99

MOTOR, BEARINGS: Develops maximum 1/2 HP. Slide switch. Two no-load speeds of 2600 to 3200 strokes per minute . . . 1/2-inch blade stroke. Sleeve bearings. 252 watts.

HOUSING: Thermoset polyester.

ORDERING INFO: See Warranty on page 8.
9 GT 1718—Shpg. wt. 4 lbs. 12 oz. \$14.99

(4) One-speed, develops 1/2 HP \$9.99

MOTOR, BEARINGS: Develops maximum 1/2 HP. Slide switch. No-load speed of 3200 strokes per minute . . . 1/2-inch blade stroke. Sleeve bearings. 240 watts.

HOUSING: Thermoset polyester.

ORDERING INFO: See Warranty on page 8.
9 GT 1717—Shpg. wt. 3 lbs. 15 oz. \$9.99



(5 thru 16) CRAFTSMAN® Scroller and Sabre Saw Blades

Heat-treated, precision-ground . . . self-centering for a straight, clean cut. Metal-cutting blades of M-2 high-speed steel; wood-cutting blades of high-carbon steel. These blades fit most sabre saws.

USES, SIZES, ORDERING INFORMATION:

(5) Super-fine Finishing Blade. Produces smooth, almost splinterless cuts in woods, plastics, laminates to 3/4 in. thick. 20 teeth per inch; 2 1/2 in. long.
9 GT 28761—Package of 2. Shipping weight 3 ounces Pkg. \$1.69

Key	Teeth per in.	Uses	Lnth. in.	Catalog Number	Wt. oz.	Pkg. of	Per pkg.
(6)	Knife edge	For smooth cutting of rubber, leather tile, cardboard and wallboard	3	9GT2873	2	2	99c
(7)	32	For mild steel rods, pipe, sheet, etc. . .	3	9GT28701 9GT28706	2 4	2 10	\$1.09 4.99
(8)	24	For all non-ferrous metals (brass, copper, aluminum, magnesium, etc.) . .	3	9GT28702 9GT28705	2 3	2 10	1.09 4.99
(9)	14	General-purpose—wood, steel and non-ferrous metals, 1/4-in. or thicker . .	3 1/2	9GT2874 9GT28745	2 3	2 10	99c 4.49
(10)	10	For hardwood, wallboard, plastic, general crosscutting	3 1/2	9GT28712 9GT28716	3 3	2 10	89c 3.99
(11)	10	For finish cuts in plywood or veneer to 1 1/2 in. thick. Tapered back edge . .	3	9GT2876 9GT28764	2 3	2 10	1.19 4.99
(12)	10	Kromedge® Scroller Blade specially designed for intricate scroll cuts . . .	3	9GT28781	3	2	1.29
(13)	7	For fast cutting, ripping of soft wood (1x4's to 2x6's), and plasterboard . . .	3 1/2	9GT28711 9GT28715	3 4	2 10	49c 3.99
(14)	7	For cutting wood up to 5 in. thick by saws with 1-in. or longer stroke . . .	6	9GT2875	2	Each	99c
(15)	3	Deep-angle cuts in wood to 5 in. thick by saws with 1-in. or longer stroke . .	6	9GT2879	2	Each	99c
(16)	7	For cutting flush to wall or joints . . .	3 1/2	9GT2877	3	Each	99c

Package of 14 Blades. One of (6) and (15), two of (7 thru 11), two of (13).
9 GT 28576—Shipping weight 5 ounces Pkg. \$5.99

CRAFTSMAN® Dual-Action Pad Sanders

Change actions with the flip of a lever:

Orbital action is best for rough sanding

Straight-line is best for fine sanding



(17 and 18) 1/2-sheet Pad

1/2 HP, without dust pick-up

\$29.50

1/4 HP, with dust pick-up

\$44.99

MOTOR, BEARINGS, GEARS: Each sands at a no-load speed of 400 orbits or strokes per minute. Slide switch. Ball and sleeve bearings. Single-reduction spur gearing.

HOUSING: Thermoset polyester gear and motor housings, handles. Built-in front assist handle for firm, 2-hand control. Counter-balance design for reduced vibration, operator fatigue.

SANDING PAD: 1/2-sheet; 3 3/4 x 7 inches. Sandpaper clamp with quick-change lever. Includes medium-grit sanding sheet.

ELECTRICAL INFO: Double-insulated . . . no grounding needed. 110-120-volt, 60-Hz. AC UL listed. 6-foot, 2-wire cord.

(17) Motor develops maximum 1/2 HP, without dust pick-up.

Accessible motor brushes. 240 w.

ORDERING INFO: See Warranty on page 8. Wt. 5 lbs. 4 oz.
9 GT 1163 \$29.50

(18) Motor develops maximum 1/4 HP, with dust pick-up.

Externally accessible motor brushes for easy checking. Enclosed housing . . . vacuum-action draws sawdust into bag, keeps work area clean. 360 watts.

ORDERING INFO: See Warranty on page 8. Wt. 9 lbs. 4 oz.
9 GT 1165 \$44.99

Lamb's Wool Polishing Pads.

SIZES, ORDERING INFORMATION:

For 1/2-sheet pad sanders.

9 GT 2530—Wt. 2 oz. 99c

For 1/4-sheet pad sanders.

9 GT 2537—Wt. 3 oz. \$1.19

(19) 1/2-sheet Pad, 1/2 HP

Without dust pick-up

\$59.99

With dust pick-up

\$69.50

More power, coverage mean this sander works up to 40% faster than (17) and (18). MOTOR, BEARINGS, GEARS: Develops max. 1/2 HP. No-load speed of 4000 orbits or strokes per min. Trigger switch, safety lock. 100% ball and roller bearings. Single-reduction helical gearing. Externally accessible motor brushes for easy checking.

HOUSING: Non-glare aluminum gear housing. Thermoset polyester motor housing, handles. Built-in front assist handle for firm, 2-hand control. Counterbalanced for reduced vibration, operator fatigue.

SANDING PAD: 1/2-sheet; 4 1/2 x 9 in. Sandpaper clamp with quick-change lever. Includes medium-grit sanding sheet.

ELECTRICAL INFO: Double-insulated. 110-120-v., 60-Hz. AC UL listed. 6-ft., 2-wire neoprene cord with 3-inch bend relief.

ORDER INFO: See Warranty on page 8.

With dust pick-up . . . our best pad sander (as shown). Enclosed housing . . . keeps work area clean. 540 watts.

9 GT 1168—Shpg. wt. 10 lbs. 8 oz. \$69.50

Without dust pick-up (not shown). 360 w.
9 GT 1166—Shpg. wt. 9 lbs. 9 oz. \$59.99

CRAFTSMAN® Orbital Sander \$14.99

1/2-sheet Pad, 1/4 HP

MOTOR, BEARINGS, GEARS: Develops maximum 1/4 HP. No-load speed of 9200 orbits per minute. Slide switch. Sleeve bearings. Single-reduction spur gearing. Accessible motor brushes.

HOUSING: Thermoset polyester. Built-in front assist handle for firm, 2-hand control. Counterbalance design.

SANDING PAD: 1/2-sheet; 3 3/4 x 7 inches. Sandpaper clamp with quick-change lever. Includes medium-grit sanding sheet.

ELECTRICAL INFORMATION: Double-insulated . . . no grounding needed. 110-120-v., 60-Hz. 156 w. AC UL listed. 6-ft., 2-wire cord.

ORDERING INFO: See Warranty on page 8.


9 GT 1062—Shpg. wt. 5 pounds 10 ounces . . . \$14.99

See page 20 to order extra sanding sheets

See page 21 for storage cases to fit these sanders



Do rough sanding or fine polishing with either of these tools . . . save valuable time and labor

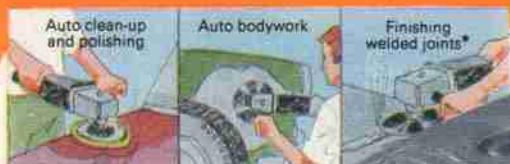

*See accessories (3, 4)

(1) Our Best CRAFTSMAN® Sander-Polisher

- Two-speed, develops maximum 1½ HP
- Sands with 9-inch disc, polishes with 7-in. bonnet

\$119.99

*Sears * Best*

(1) 9-in. Sander, 7-in. Polisher. 2 speeds . . . choose the best for each job. MOTOR, BEARINGS, GEARS: Develops maximum 1½ HP with no-load speeds of 4600 rpm for fast sanding, 3600 rpm for fine polishing. 100% ball bearings. Efficient, low-friction spiral bevel gears. Trigger switch with lock, quick release. Externally accessible motor brushes for easy checking.

HOUSING: Non-glare aluminum gear housing; thermoset polyester motor housing; high-impact polymer handles. Removable auxiliary handle fits either side. ½-inch spindle with spindle lock. Rubber bumper with hang-up bail. ACCESSORIES: Includes three 9-in. sanding discs (fine, medium, coarse), 9-in. fiber back-up pad, 7-in. and 4½-in. rubber back-up pads, 7-in. lamb's wool polishing bonnet.

ELECTRICAL INFO: Double-insulated . . . no grounding needed. 110-120-v., 60-Hz. 1080w. AC. UL listed. 6-ft., 2-wire neoprene cord with 3-in. bend relief.

ORDERING INFO: See Warranty on top of page 8, safety note below. 9 GT 1158—Shipping weight 14 pounds 4 ounces . . . \$119.99

7-inch Sander-Polisher. As above except develops maximum 1¼ HP; 7-in. sanding discs and fiber pad, 3½-in. and 7-in. rubber pads; 1020 watts. 9 GT 1157—Shipping weight 13 pounds 14 ounces . . . \$99.99

Aluminum-oxide Sanding Discs. Tough fiber backing. Package of 10. DIAMETERS, GRITS, ORDERING INFORMATION:

Diameter	Grit	Catalog Number	Shipping weight	Price Package	5 Packages for
7-inch	80/Fine	9 GT 25299	1 lb. 2 oz.	\$4.79	\$22.70
	50/Medium	9 GT 25291	1 lb. 10 oz.	4.99	23.70
	36/Coarse	9 GT 25292	1 lb. 12 oz.	5.29	25.00
9-inch	80/Fine	9 GT 25287	2 lbs. 3 oz.	7.29	35.00
	50/Medium	9 GT 25288	2 lbs. 6 oz.	7.49	35.50
	36/Coarse	9 GT 25289	2 lbs. 8 oz.	7.79	37.00

1

2

3

4

5

(2) CRAFTSMAN® High-speed 7-in. Sander

- One-speed, develops maximum 1 HP
- Sands, polishes with 7-in. disc, *bonnet

\$84.99

(2) High-speed 7-inch Sander. As sander-polisher (1) except develops maximum 1 HP with no-load speed of 4600 rpm for fast sanding; 3½-in. rubber pad, 7-in. fiber pad, sanding discs; 960 w. Order bonnet below for polishing.

ORDERING INFO: See Warranty at top of page 8, safety note below. 9 GT 1156—Shipping weight 13 pounds 14 ounces . . . \$84.99

Lamb's Wool Polishing Bonnet.

ORDER INFO: For sander above or as replacement for 9 GT 1158, 9 GT 1157. 9 GT 2528—Shipping weight 5 ounces . . . \$2.19

(3) Grinding Wheel. For fine finish work, alum.-oxide. Fits ½-in. spindle. SIZES, ORDER INFO: Use with safety guard 9 GT 1711 or 9 GT 1712 below.

9 GT 64101—For 7-in. sander-polishers. Shpg. wt. 1 lb. 2 oz. . . . \$4.49

9 GT 64102—For 9-in. sander-polishers. Shpg. wt. 2 lbs. 10 oz. . . . 5.49

(4) Safety Guard for 7-inch Sanders. High-impact polymer. Red. ORDERING INFORMATION: Use with grinding wheel 9 GT 64101 above.

9 GT 1711—Shipping weight 1 pound 8 ounces . . . \$9.99

Safety Guard for 9-inch Sanders (not shown). Heavy-gauge steel. Black. ORDERING INFORMATION: Use with grinding wheel 9 GT 64102 above.

9 GT 1712—Shipping weight 2 pounds . . . \$12.99

(5) 5-in. Wire Cup Brush. For paint, rust, scale removal. Steel 0.02-ga. wire. ORDER INFO: Fits ½-in. spindle . . . use with sander-polishers (1 and 2).

9 GT 64106—Shipping weight 2 pounds 12 ounces . . . \$6.99



Versatile CRAFTSMAN® 2-speed, 6-inch Sander-Polisher \$52.50 without drill chuck

converts to ½-inch Drill with Chuck (6)

MOTOR, BEARINGS, GEARS: Develops maximum ¾ HP with no-load speeds of 4200 rpm for sanding, 3500 rpm for polishing. 100% ball bearings. Helical gears. Trigger switch with lock, quick release. Externally accessible motor brushes for easy checking.

HOUSING: Polished aluminum gear housing; thermoset polyester motor housing; high-impact polymer handles. Built-in front assist handle. With ½-inch spindle.

ACCESSORIES: Includes three 6-in. sanding discs (fine, medium, coarse); 6-in. rubber back-up pad; 6-in. lamb's wool polishing bonnet. Buy chuck at right to convert sander to electric drill.

ELECTRICAL INFO: Double-insulated . . . no grounding needed. 110-120-v., 60-Hz. 660 watts. AC. UL listed. 6-ft., 2-wire cord with 3-in. bend relief.

ORDER INFO: See Warranty p. 8, safety note left. 9 GT 1152—Shipping weight 6 lbs. 7 oz. . . . \$52.50



SAFETY NOTE: Protect your eyes . . . see safety equipment, page 35.

(6) Geared Key Chuck. Replacement for Sears and other drills; converts sander-polisher 9 GT 1152 to drill. Hardened steel; nickel-chrome-moly jaws. Keyholes don't extend into body cavity so they help keep dirt out. ½-inchx20-thread spindle . . . ¾ to ½-inch capacity. Tested for accuracy.

ORDERING INFORMATION: 9 GT 2980—Shipping weight 1 pound . . . \$7.99

6-inch Aluminum-Oxide Sanding Discs. Pkg. of 6.

GRITS, ORDERING INFORMATION: 9 GT 25293—Fine. Shpg. wt. 6 oz. . . . Pkg. 99c

9 GT 25294—Medium. Shpg. wt. 7 oz. . . . Pkg. 99c

9 GT 25295—Coarse. Shpg. wt. 6 oz. . . . Pkg. 99c

6-inch Lamb's Wool Polishing Bonnet. ORDERING INFORMATION: 9 GT 2527—Shipping weight 4 ounces . . . \$1.89

CRAFTSMAN® Belt Sanders

Tackle any large surface with ease... sand wood, metal, or plastic

With dust pick-up

\$64.99

1-HP Belt Sanders

- Continuous belt with 14 sq.-in. work surface... moves at no-load speed of 1300 feet per minute
- Sanding surface measures 3x4.7 inches

(1) With dust pick-up.

MOTOR, BEARINGS, GEARS: Develops maximum 1 HP with no-load speed of 1300 ft. per min. 100% ball bearing motor. Combination spur gear, timing belt drive. Trigger switch. Externally accessible motor brushes.

HOUSING: High-impact polymer gear housing, handle, auxiliary grip, belt cover. Thermoset polyester motor housing.

SANDING SURFACE: 14 sq. in. Sands flush to vertical surfaces. Includes one medium-grit sanding belt. Order extra belts on p. 12.

ELECTRICAL INFO: Double-insulated... needs no grounding. 110-120-v., 60-Hz. 900 watts. AC. UL listed. 6-ft., 2-wire cord.

ORDERING INFO: See warranty on page 8, safety note below. 9 GT 1175—Wt. 12 lbs. 8 oz. ...\$64.99

(2) Belt Sander above without dust pick-up. 840 watts.

ORDERING INFO: See warranty on page 8, safety note below. 9 GT 1172—Wt. 8 lbs. 9 oz. ...\$54.50

2



Without dust pick-up **\$54.50**

3



With dust pick-up **\$89.50**

Heavy-duty 1½-HP Belt Sanders

- Continuous belt with 24 sq.-in. sanding surface combines with a no-load speed of 1500 ft. per min. to sand up to twice as fast as (1 and 2)
- Big 4x6-inch sanding surface provides stable, efficient sanding even on rough surfaces

4



Without dust pick-up

\$79.99

(3) With dust pick-up.

MOTOR, BEARINGS, GEARS: Develops maximum 1½ HP with no-load speed of 1500 feet per minute. 100% ball and roller bearings. Combination spur gear and timing belt drive. Trigger switch. Extra-large externally accessible motor brushes for easy checking and replacement.

HOUSING: High-impact polymer gear housing. Thermoset polyester motor housing, handle. Auxiliary grip provides firm, 2-hand control. Satin-finished, non-glare aluminum belt cover. Base with steel wear strip for a more smooth and rigid sanding surface.

SANDING SURFACE: 24 square inches. Sands flush to vertical surfaces. Includes one medium-grit sanding belt. Order extra belts on p. 12.

ELECTRICAL INFORMATION: Double-insulated. 110-120-v., 60-Hz. 900 watts. AC. UL listed. 6-ft., 2-wire neoprene cord with 3-inch bend relief.

ORDERING INFORMATION: See warranty on page 8, safety note below. 9 GT 1178C—Shipping weight 18 pounds ...\$89.50

(4) Belt Sander above without dust pick-up.

ORDERING INFORMATION: See warranty on page 8, safety note below. 9 GT 1176C—Shipping weight 16 pounds ...\$79.99

SAFETY NOTE: Protect your eyes... be sure to wear safety glasses or goggles when using sanders on these two pages. For our selection of safety equipment, see page 35.

Belt Sander Finishing Stand \$19.99

Convert your belt sander to a finishing machine... bring workpiece to tool, reduce operator fatigue.

Adds versatility to your belt sander... lets you bring work to tool. Fits all Sears 3 or 4-inch sanders. Do heavy-duty work, extended tasks with less operator fatigue. Clamps sander in horizontal position for heavy-duty sanding, in vertical position for touch-ups.

CONSTRUCTION: Made of carbon steel with black wrinkle finish. Measures 13x11x3 inches. With mounting screws for attaching to wall, table.

ORDERING INFORMATION: 9 GT 25961—Shpg. wt. 7 lbs. 14 oz. ...\$19.99



Vertical position for touch-ups

Horizontal position for heavy-duty sanding

2½-HP Edger-Sander

Gets at those hard-to-reach areas... sands along walls, on stairs

MOTOR, BEARINGS, GEARS: Develops maximum 2½-HP with no-load speeds of 3500 rpm for rough sanding, 2800 rpm for fine finishing. 100% ball bearings. Gear and cogged belt drive. Large ventilating fan for cool running. Trigger switch. Externally accessible motor brushes.


HOUSING: Thermoset polyester gear housing; aluminum motor housing, handle. Built-in headlight. Slotted 7-in. rubber and steel back-up disc prevents excessive heating. Counterbalance design for reduced operator fatigue. Enclosed housing.

SANDING SURFACE: Sands with 7-inch diameter sanding disc; one medium-grit disc included.

ELECTRICAL INFO: 115/230 volts, 60-Hz., AC or DC, 25-ft., 3-wire cord with strain relief.

ORDER INFO: From Bowling Green, Ohio. See shpg. note below. 9 GT 75201—Wt. 42 lbs. ...\$398.75

SHIPPING NOTE: For F items (such as 9 GT 75201) pay motor carrier charges from factory indicated. Allow extra time. Sorry, no C.O.D.'s.



\$398.75

7-in. Sanding Discs for Edger-Sander

GRITS, ORDER INFO: From Braintree, Mass. See shpg. note, left.

Fine. Pkg. of 100. Shpg. wt. 3 lbs. 9 GT 75202 ...\$18.95

Medium. Pkg. of 100. Shpg. wt. 8 lbs. 9 GT 75203 ...\$28.00

Coarse. Pkg. of 50. Shpg. wt. 4 lbs. 9 GT 75204 ...\$18.95

Sander with 8-in. drum, 3-HP. Patented stabilizer and drum pressure control enables sander to sand off rises until floor assumes a level condition... does not follow contour already in floor.

MOTOR, BEARINGS, GEARS: Develops maximum 3-HP. Variable no-load speeds of 1600 to 2800 rpm. Drum pulley dial for rapid speed change. Ball bearings. Balanced V-belt drive.

HOUSING: Non-glare aluminum. Fixed handle with fuse box, panel motor switch. Lever-controlled sanding helps eliminate gouging, chatter marks. Dust pan removes to clean housing.

SANDING DRUM: 8-inch width. Variable pressure, 52 to 103 lbs. ... calibrated adjustment screw. Hinged cover. Clamps hold sandpaper edge to edge for efficient cutting action, use of paper.

ELECTRICAL INFO: 115/230-v., 60-Hz. AC. Fuses in line to protect against shorts, overload. 50-foot, 3-wire cord.

ORDER INFO: From Bowling Green, Ohio. Shipping note, left. 9 GT 75205N—Shipping weight 255 pounds ...\$1490.00


Sander with 8-in. drum, 1½-HP. Single speed (2300 rpm). 9 GT 75214—Shipping weight 120 pounds ...\$890.00

Sander with 12-in. drum, 3-HP. 2 speeds (2000 and 2400 rpm). 9 GT 75209N—100-ft. cord. Shpg. wt. 330 lbs. ...\$1890.00

Sandpaper for Drum Sanders above. 50-yard rolls. **ORDER INFO:** From Braintree, Mass. See shipping note, left.

Drum Size	Grit	Catalog Number	Shpg. wt.	Roll
8 inches	Fine	9 GT 75206	14 lbs.	\$45.00
	Medium	9 GT 75207	31 lbs.	74.00
	Coarse	9 GT 75208	31 lbs.	90.00
12 inches	Fine	9 GT 75211	22 lbs.	67.00
	Medium	9 GT 75212	43 lbs.	110.00
	Coarse	9 GT 75213	43 lbs.	136.00

\$1490.00
Heavy-duty 8-inch, 3-HP Drum Sander

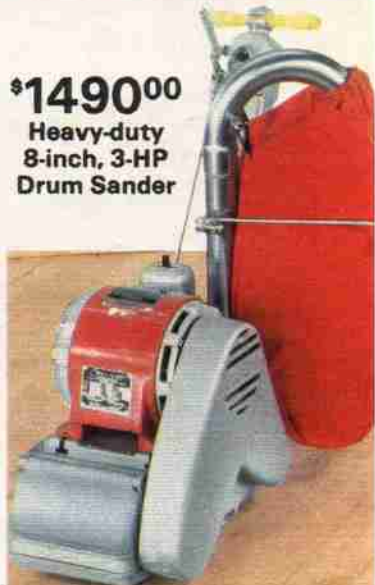

CRAFTSMAN® 3/8-inch Drills

Reversibility and variable speed control let you do more than just bore holes in wood or metal... reach for any of these drills to do all the jobs at right... and more



You can do all these jobs and more with accessories sold on pages 116 thru 118

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Our most powerful 3/8-in. Drill... 360 watt motor develops maximum 1/3-HP
\$59⁵⁰

300 watt motor develops maximum 1/3-HP
\$39⁹⁹



264 watt motor develops maximum 1/5-HP
\$29⁹⁹

CRAFTSMAN® 3/8-inch Reversible Rotary Hammer Drill



384 watt motor develops maximum 3/8-HP

Rotary action for wood or metal, hammer action for brick or concrete... flick a switch to reverse

\$69⁹⁹

Rotary-drill in wood, plastic or light metal... adjust positive locking collar to percussion-drill at 21 impacts per revolution (max. 24,000 per minute) in brick, concrete, tile or stone.

MOTOR, BEARINGS, GEARS: Develops maximum 3/8 HP. Permanently lubricated ball, roller, sleeve bearings. Double reduction helical, spur gearing. Variable speeds, from 0 to 1200 rpm, trigger locks. Reversing switch for backing out.

CHUCK: 3/8-in. capacity. Geared chuck threaded for 3/8-in.x24 spindle. Pin-type spindle lock.

HOUSING: Heat-resistant polyester motor housing; aluminum gear housing. Depth gauge mounted on side.

ELECTRICAL INFO: Double insulated, 110-120-v., 384 w., 60-Hz. AC. UL listed. 6-foot, 2-wire neoprene cord.

ORDERING INFORMATION: See Warranty next page.

9 GT 1811—Wt. 6 lbs. 1 oz. \$69.99

CRAFTSMAN® Single-speed 3/8-in. Drill

MOTOR, BEARINGS, GEARS: Develops max. 1/5-HP. Single, no-load speed, 1200 rpm. Permanently lubricated ball thrust, sleeve bearings. Double reduction spur gearing.

CHUCK: 3/8-in. capacity. Geared chuck threaded for 3/8-in.x24 spindle.

HOUSING: Thermoset polyester housing.

ELECTRICAL INFO: Double insulated. 110-120-v. 264 w., 60-Hz. AC. UL listed. 6-ft., 2-wire cord.

ORDERING INFO: See Warranty on next page.

9 GT 1142—Shpg. wt. 3 lbs. 10 oz. \$11.99



\$11⁹⁹

14 Sears COMPBK SLAEGJO

CRAFTSMAN® 1/2-inch Electric Drills



600 watt motor develops max. 1/2-HP
\$69⁵⁰ single speed

576 watt motor develops max. 3/4-HP
\$59⁹⁹ single speed

360 watt motor develops maximum 1/3-HP
\$29⁵⁰



360 watt motor develops maximum 3/8-HP
\$49⁹⁹

(1) 360-watt, 3/4-HP Drill

MOTOR, BEARINGS, GEARS: Motor develops max. 3/4-HP. Permanently lubricated, 100% ball, roller bearings for long life. Double reduction helical gears for the smoothest, quietest power transmission possible. Externally accessible motor brushes for easy checking or replacement. Pressure on trigger controls gives variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation . . . releases quickly. Reversing switch for backing out stuck bits, removing screws.
CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-in. x 24 spindle. Pin-type spindle lock for quick chuck removal.
HOUSING: Glass-reinforced thermoset motor housing; die cast aluminum gear housing. Incl. removable top-assist handle for 2-hand control.
ELECTRICAL INFORMATION: Double insulated, 110-120 volts, 360 watts, 60 Hz. AC. UL listed. 6-foot, 2-wire neoprene cord.
ORDERING INFORMATION: See Warranty below.
9 GT 1148—Shipping weight 5 pounds 9 ounces . . . \$59.50

(2) 300-watt, 1/2-HP Drill

MOTOR, BEARINGS, GEARS: Motor develops max. 1/2-HP permanently lubricated ball thrust, sleeve bearings. Double-reduction spur gearing for smooth, quiet power transmission. Externally accessible brushes for easy checking, replacement. Pressure on trigger controls gives variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation . . . releases quickly. Reversing switch for backing out bits, screws.
CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-in. x 24 spindle. Pin type spindle lock for quick chuck removal.
HOUSING: Glass-reinforced thermoset and die-cast aluminum.
ELECTRICAL INFORMATION: Double insulated, 110-120 volts, 300 watts, 60 Hz. AC. UL listed. With 6-foot, 2-wire cord.
ORDERING INFORMATION: See Warranty below.
9 GT 1051—Shipping weight 4 pounds . . . \$39.99

300 watt, 1/2-HP Drill. Like Drill (9 GT 1051) above except with sleeve bearings, stamped cup chuck. Motor develops 1/2-HP.
9 GT 1049—Shipping weight 4 pounds . . . \$34.99

(3) 264-watt, 1/2-HP Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/2 HP. Permanently lubricated ball thrust and sleeve bearings. Double-reduction spur gearing. Pressure on trigger controls variable no-load speeds from 0 to 1200 rpm. Trigger locks for continuous operation . . . releases quickly.
CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-in. x 24 spindle.
HOUSING: Entire housing constructed of thermoset polyester.
ELECTRICAL INFORMATION: Double insulated, 110-120 volts, 264 watts, 60 Hz. AC. UL listed. With 6-foot, 2-wire cord.
ORDERING INFORMATION: See Warranty below.
9 GT 1144—Reversible. Shipping weight 3 lbs. 15 oz. . . . \$29.99
9 GT 1143—Non-reversible. Shipping weight 3 lbs. 10 oz. . . . 17.99

Maximum torque at low speeds for heavy-duty drilling in metal, plastic, wood . . . precision reduction gearing for long life, uniform torque

(4) 600-watt, 1/2-HP Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/2-HP. Single-speed . . . no-load speed of 575 rpm. Permanently lubricated 100% ball, roller bearings. Double-reduction helical gears for smooth, quiet power transmission. Trigger switch locks for continuous operation . . . releases quickly. Toggle-type reversing switch . . . just flip for backing out stuck bits.
CHUCK: 1/2-inch capacity. Geared chuck threaded for 1/2-inch x 20 spindle. Pin type spindle lock.
HOUSING: Sectional die-cast aluminum, non-glare finish. Removable-top handle, 4-position "D" grip rear handle of high-impact polymer, textured grips.
ELECTRICAL INFORMATION: Double insulated, 110-120 volts, 600 watts, 60 Hz. AC. UL listed. 6-foot, 2-wire neoprene cord.
ORDERING INFORMATION: See Warranty below.
9 GT 1149—Shipping weight 9 pounds 5 ounces . . . \$69.50

576-watt, 1/2-HP Drill. Like Drill (9 GT 1149) above except with permanently lubricated ball and sleeve bearings. 576 watts, motor develops 1/2-HP.
9 GT 1139—Shipping weight 9 pounds 3 ounces . . . \$59.99

(5 and 6) 360-watt Drills

CHUCK: 1/2-inch capacity. Geared chuck threaded for 1/2-in. x 20 spindle.
HOUSING: Thermoset polyester motor housing; die-cast aluminum gear housing. With top assist handle that removes quickly.
ELECTRICAL INFORMATION: Double insulated . . . needs no grounding. 110-120 volts, 360 watts, 60 Hz. AC. UL listed. 6-foot, 2-wire cord.

(5) 1/2-HP, Single-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 1/2-HP. Single, no-load speed of 525 rpm. Permanently lubricated ball thrust and sleeve bearings. Triple-reduction spur gearing. Trigger-switch locks for continuous operation . . . releases quickly. Toggle-type reversing switch for backing out bits. Pin-type spindle lock.
ORDER INFO: See Warranty below.
9GT11191—Wt. 4 lbs. 10 oz. \$29.50

FULL 1-YR. WARRANTY ON CRAFTSMAN PORTABLE ELECTRIC TOOLS: If any Craftsman Portable Electric Tool fails to give complete satisfaction within one year from the date of purchase, return it to any Sears store throughout the United States and it will be replaced free of charge.

(6) 3/4-HP, Variable-speed Drill

MOTOR, BEARINGS, GEARS: Motor develops maximum 3/4-HP. Trigger pressure controls no-load speed from 0 to 600 rpm. Permanently lubricated ball thrust, sleeve bearings. Precision helical gears. Motor brushes externally accessible for easy checking or replacement. Toggle-type reversing switch for backing out stuck bits.
ORDERING INFORMATION: See Warranty below.
9 GT 1129—Wt. 6 lbs. 5 oz. \$49.99

CRAFTSMAN® Cordless Drills

Take-with, rechargeable power at your fingertips

No need to bring the job to the drill because you're limited by the length of your extension cord . . . take the drill to the job—any-where. Self-contained batteries recharge overnight . . . just plug charger into any 110-120 volt outlet



(A) Cordless 3/4-inch Reversible Drill

Drills up to 140 (1/4-inch) holes through a pine 2x4 on one charge . . . double your drilling time with extra power-pak sold below.

\$49.99

(A) Drill up to 140 (1/4-inch) holes through a pine 2x4 on one charge. Power-pak pulls out from back of drill for recharging. Extra rechargeable power-pak available for continuous drilling (order below).

MOTOR, BEARINGS, GEARS: No-load speed of 300 rpm. (max. on full charge). Sleeve bearings are permanently lubricated. Spur gearing. Reversing switch.

CHUCK: 3/8-inch capacity. Geared chuck threaded for 3/8-in. x 24 spindle.

HOUSING: Made of thermoset polyester.

ELECTRICAL INFORMATION: Recharger runs on 110-120 volts, 60 Hz. AC. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See Warranty at left.

9 GT 1056—Shipping weight 5 pounds 2 ounces . . . \$49.99

(B) Extra Power-Pak for Drill (A) above.

9 GT 11134—Shipping weight 1 pound 3 ounces . . . \$19.99

Cordless 1/4-inch Reversible Drill

Drills up to 100 (1/4-inch) holes through a pine 2x4 on one charge

\$29.50



MOTOR, BEARINGS, GEARS: No-load speed of 300 rpm. (maximum on full charge). Permanently lubricated ball thrust and sleeve bearings. Spur gearing. Reversing switch.

CHUCK: 1/4-inch capacity. Geared chuck threaded for 3/8-in. x 24 spindle.

HOUSING: Made of thermoset polyester.

ELECTRICAL INFORMATION: Recharger runs on 110-120 volts, 60 Hz. AC. UL listed. 6-foot, 2-wire cord.

ORDERING INFORMATION: See Warranty at left.

9 GT 1111—Shipping weight 3 pounds 10 ounces . . . \$29.50

CRAFTSMAN® 1/4-inch Single-speed Drill

MOTOR, BEARINGS, GEARS: Develops max. 1/4-HP. Single no-load speed of 2000 rpm. Ball thrust, sleeve bearings . . . permanently lubricated. Double-reduction spur gearing.
CHUCK: 1/4-in. cap. Geared, threaded for 3/8-in. x 24 spindle.
HOUSING: Made of thermoset polyester.

ELECTRICAL INFORMATION: Double-insulated 110-120 v., 240 w., 60 Hz. AC. UL listed. 6-ft., 2-wire cord.

ORDERING INFORMATION: See Warranty at left.

9 GT 1140—Shipping weight 3 lbs. 10 oz. . . . \$8.99



Motor develops maximum 1/4-HP
\$8.99

COMPSK SLAEGJD **Sears** 15

TWIST DRILL BITS for wood and metal boring

Like all of our finest quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these drill bits so outstanding:

- (A) Size stamps on each bit for fast, easy identification
- (B) High-speed steel throughout
- (C) Heat-treated six times for tough strength and durability
- (D) Precision-ground flutes for accurate hole sizes
- (E) Black oxide finish acts as lubricant
- (F) Precision-ground margin and point relief for efficient drilling
- (G) Exceed Federal Specifications GGG-D-751b for strength
- (H) Point accurate to .002 tolerance

New at Sears! 115-pc. Twist Drill Bit Set... the most complete set we've ever offered

High quality bits... see construction above. SIZES: 60 wire-gauge bits from 1 thru 60; 29 fractional bits from 1/16 thru 1/2-inch by 64ths of an inch; 26 lettered bits A thru Z. Comes with well-organized metal storage case... open lid and bits raise.

ORDERING INFORMATION:
9 GT 67115—Wt. 9 pounds 2 oz.Set \$169.99

115-pc. Set
\$169.99

(1 thru 5) High quality twist drill bits... see construction story above. Each set comes in its own convenient storage case... metal case with set (1), plastic case with sets (2 thru 5).

Our best selling Bit Set... 29 pieces
\$49.99

(1) 29-pc. Set. Save \$8.26. Individual pieces total \$58.25. SIZES: 1/16 to 1/2-in. by 64ths of an in. Jobber length. ORDER INFO: Wt. 3 lbs. 9 oz. 9 GT 6705Set \$49.99

21-pc. Set (not shown). Save \$1.52. Individual pcs. total \$26.51. SIZES: 1/16 to 1/2-in. by 64ths of an in. Jobber length. ORDER INFO: Wt. 1 lb. 11 oz. 9 GT 6719Set \$24.99

15-pc. Set (not shown). Save \$5.21. Individual pieces total \$30.20. SIZES: 1/16 to 1/2-in. by 64ths of an in. Jobber length. ORDER INFO: Wt. 2 lbs. 2 oz. 9 GT 6720Set \$24.99

60-pc. Set (not shown). SIZES: Wire-gauge sizes ranging from 1 thru 60. ORDER INFO: Wt. 1 lb. 8 oz. 9 GT 6708Set \$32.99

(2) 17-pc. Set. Save \$2.07. Individual pieces total \$20.55. SIZES: 1/16 to 1/2-in. by 32nds of an in. plus 1/8, 3/16, 1/4-in. with short shanks turned down to 1/4-in. Jobber length. ORDER INFO: Wt. 15 oz. 9 GT 6711Set \$18.49

(3) 13-pc. Set. Save \$1.11. Individual pieces total \$9.80. SIZES: 1/16 to 1/2-in. by 64ths. Jobber length. ORDER INFO: Wt. 8 oz. 9 GT 6639Set \$8.89

10-pc. Set (not shown). Save \$5.94. Individual pieces total \$6.94. SIZES: 1/16 to 1/2-in. by 64ths of an in. plus 1/8, 3/16, 1/4-in. ORDER INFO: Wt. 7 oz. 9 GT 6638Set \$5.99

7-pc. Set (not shown). Save \$1.30. Individual pieces total \$5.30. SIZES: 1/16 to 1/2-in. by 32nds of an in. ORDER INFO: Wt. 7 oz. 9 GT 6637Set \$4.49

(4) 4-pc. Set. Save \$7.76. Individual pieces total \$10.76. SIZES: 1/8, 3/16, 1/4, 1/2-in. with short shanks turned down to 1/4 of an inch. ORDER INFO: Wt. 9 oz. 9 GT 6718Set \$9.99

(5) 7-pc. Metric Set. SIZES: 3.3mm thru 8.5mm. Jobber length. ORDER INFO: Wt. 10 oz. 9 GT 6631Set \$5.99

(6) Individual Bits... Jobber length. SIZES AND ORDERING INFORMATION:

Catalog No.	Diam.	Length	Wt.	Each	Catalog No.	Diam.	Length	Wt.	Each
9 GT 66901	1/16 in.	1 1/2 in.	3 oz.	39c	9 GT 66936	1 1/8 in.	0 in.	5 oz.	\$1.89
9 GT 66902	1/8 in.	2 in.	3 oz.	48c	9 GT 66917	3/16 in.	4 1/2 in.	4 oz.	1.99
9 GT 66903	3/16 in.	2 1/2 in.	3 oz.	52c	9 GT 66918	1/4 in.	4 in.	4 oz.	2.15
9 GT 66904	1/4 in.	2 1/2 in.	3 oz.	54c	9 GT 66919	5/16 in.	4 1/2 in.	5 oz.	2.59
9 GT 66905	1/2 in.	2 1/2 in.	3 oz.	58c	9 GT 66934	3/8 in.	5 1/2 in.	5 oz.	2.79
9 GT 66906	3/4 in.	2 1/2 in.	3 oz.	64c	9 GT 66921	1/2 in.	5 in.	5 oz.	2.99
9 GT 66907	1 1/16 in.	3 1/2 in.	3 oz.	69c	9 GT 66922	5/8 in.	5 1/2 in.	6 oz.	3.25
9 GT 66908	1 1/8 in.	3 1/2 in.	3 oz.	76c	9 GT 66923	3/4 in.	5 1/2 in.	6 oz.	3.55
9 GT 66909	1 1/4 in.	3 1/2 in.	3 oz.	83c	9 GT 66924	7/8 in.	5 1/2 in.	6 oz.	4.09
9 GT 66910	1 1/2 in.	3 1/2 in.	3 oz.	94c	9 GT 66925	1 in.	5 1/2 in.	6 oz.	4.39
9 GT 66911	1 3/4 in.	3 1/2 in.	3 oz.	\$1.06	9 GT 66926	1 1/8 in.	5 1/2 in.	6 oz.	4.49
9 GT 66912	1 7/8 in.	3 1/2 in.	3 oz.	1.16	9 GT 66935	1 1/4 in.	5 1/2 in.	7 oz.	4.69
9 GT 66913	2 in.	3 1/2 in.	3 oz.	1.23	9 GT 66927	1 1/2 in.	5 1/2 in.	7 oz.	5.19
9 GT 66914	2 1/4 in.	4 in.	4 oz.	1.40	9 GT 66928	1 3/4 in.	6 in.	7 oz.	5.19
9 GT 66915	2 1/2 in.	4 1/2 in.	4 oz.	1.55					

(7) Individual Short-length Bits. With 1/4-in. turned-down shank. SIZES, ORDERING INFO:
9 GT 66364—1/16-in. Wt. 2 oz.\$1.89
9 GT 66365—1/8-in. Wt. 2 oz.2.19
9 GT 66366—3/16-in. Wt. 3 oz.2.99
9 GT 66367—1/4-in. Wt. 4 oz.3.69

(8) Individual Large-diameter Bits. Turned-down shanks fit 1/2-in. electric drills... 6 in. long. SIZES, ORDERING INFO:
9 GT 67151—1 1/2-in. Wt. 8 oz.\$7.99
9 GT 67152—1 3/4-in. Wt. 9 oz.9.99
9 GT 67153—1 in. Wt. 13 oz.15.99

Wood-boring Bits



(9 and 10) Carbon-steel bits. For drilling in wood only.

(9) 7-pc. Bit Set. Not Craftsman. SIZES: 1/16, 1/8, 1/4, 3/8, 1/2, 3/4, 1-in. Jobber length. 1/4-in. shanks. ORDER INFO: In plastic pouch. 9 GT 67107—Wt. 4 oz.Set \$1.49

(10) CRAFTSMAN Electricians' Bits. 18 in. long. Drills in walls, floors. SIZES AND ORDERING INFO:
1/4-in. diam. Fits 1/4, 3/8, 1/2-in. chucks. 9 GT 66931—Wt. 8 oz.\$5.29
1/2-in. diam. Fits 3/8-in., larger chucks. 9 GT 66932—Wt. 12 oz.\$7.49
3/4-in. diam. Fits 1/2, 3/4, 1-in., larger chucks. 9 GT 66933—Wt. 14 oz.\$10.59

(11) CRAFTSMAN Wood Screw Pilot Bits. To countersink, counterbore. SET SIZES AND ORDERING INFO:
12-PC. SET: For Nos. 4, 5 screws (3/8, 1/2 in. deep); for Nos. 6, 7 screws (3/4, 1 in. deep); for Nos. 8, 9 screws (3/4, 1, 1 1/4 in. deep); for Nos. 10, 11, 12 screws (1, 1 1/4, 1 1/2 in. deep). 9 GT 4201—Wt. 13 oz.Set \$7.49
5-PC. SET: For Nos. 4, 5 screws (3/8 in. deep); for Nos. 6, 7 screws (3/4 in. deep); for Nos. 8, 9 screws (1 and 1 1/4 in. deep); for Nos. 10, 12 screws (1 1/2 in. deep). 9 GT 4203—Wt. 7 oz.Set \$3.99

(12) 6-pc. CRAFTSMAN Power Wood-boring Bit Set. Hardened steel alloy, 6 1/2 in. long. Precision-ground cutting edges, surfaces. Brad points for no-jump starts. For 1/4, 3/8, 1/2-in. drill or drill press. For extensions, see opposite page. SIZES: 1/4, 1/2, 3/8, 3/4, 1-in. ORDER INFO: In vinyl pouch. 9 GT 2092—Wt. 14 oz.Set \$7.99

Individual Power Woodboring Bits. SIZES AND ORDERING INFO:

Catalog Number	Size	Shipping weight	Each
9 GT 2093	3/8-in.	4 ounces	\$1.09
9 GT 2094	1/2-in.	4 ounces	1.19
9 GT 2095	3/4-in.	4 ounces	1.29
9 GT 2096	1-in.	4 ounces	1.39
9 GT 2097	1 1/4-in.	4 ounces	1.49
9 GT 2098	1 1/2-in.	4 ounces	1.59
9 GT 20982	1 3/4-in.	4 ounces	1.79
9 GT 20983	2-in.	5 ounces	1.89

(13) 7-pc. Woodboring Bit Set. Precision-ground... bores up to 5 in. deep. For 1/4-in. or larger elec. drills. Japan. SIZES: 1/4, 1/2, 3/8, 3/4, 1, 1 1/4-in. ORDER INFO: In plastic pouch. 9 GT 2087—Wt. 1 lb.Set \$5.99
4-pc. Set. Sizes 3/8, 1/2, 3/4, 1-in. Japan. ORDERING INFORMATION: 9 GT 2086—Wt. 9 oz.Set \$3.99

(14 thru 17) CRAFTSMAN Masonry, Non-ferrous Metal-boring Bits. Tungsten-carbide tips drill brick, stone, concrete, wallboard, cast-iron. Special flutes remove chips. SET SIZES AND ORDERING INFO:

(14) 7-PC. SET: Sizes 3/16x3 in., 1/4x4 in., 3/8x4 in., 1/2x4 in., 3/4x4 in., 1x4 in., 1 1/4x4 in. All with 1/4-in. shanks. SIZES 1/4x6 in., 3/8x6 in., 1/2x6 in., 3/4x6 in., 1x6 in., 1 1/4x6 in. All with 1/4-in. shanks. 9 GT 67347—Wt. 1 lb. 8 oz.Set \$10.99
(15) 5-PC. SET: Sizes 3/16x3 in., 1/4x4 in., 3/8x4 in., 1/2x4 in., 3/4x4 in. All with 1/4-in. shanks. 9 GT 67344—Wt. 8 oz.Set \$4.99
(16) 3-PC. SET: Sizes 3/16x3 in., 1/4x4 in., 3/8x4 in. All with 1/4-in. shanks. 9 GT 67343—Wt. 5 oz.Set \$2.49


Individual Carbide-tipped Bits. SIZES AND ORDERING INFORMATION:

Catalog No.	Size	Shank Length	Wt.	Each
9 GT 67085	1/16 in.	3 1/2 in.	3 oz.	79c
9 GT 67328	1/8 in.	1/4 in.	4 in.	2 oz. \$1.39
9 GT 67087	1/4 in.	1/4 in.	4 in.	3 oz. 1.19
9 GT 67088	3/8 in.	1/4 in.	4 in.	4 oz. 1.19
9 GT 67325	1/2 in.	3/4 in.	6 in.	6 oz. 1.99
9 GT 67088	3/4 in.	3/4 in.	6 in.	9 oz. 2.99
9 GT 67089	1 in.	3/4 in.	6 in.	10 oz. 3.49

(17) 13-in. Fluted Carbide-tipped Bits. 1/4-in. shanks except 1/2-in. size (3/8-in. shank). SIZES, ORDERING INFORMATION:
9 GT 67381—1/4-in. Wt. 8 oz.\$2.49
9 GT 67382—1/2-in. Wt. 8 oz.2.99
9 GT 67383—3/4-in. Wt. 10 oz.3.29
9 GT 67384—1-in. Wt. 12 oz.3.49

(18) High Speed Steel Bit Sets. For metal boring. Jobber length. In plastic pouch. SET SIZES, ORDER INFO: Not Craftsman.
14-PC. SET: 1/16 thru 1/2-in. by 64ths plus 3/32, 1/4, 5/16, 3/8, 1/2-in. 9 GT 67119—Wt. 10 oz.Set \$9.99
10-PC. SET: 1/8 thru 1/2-in. by 64ths plus 3/16, 1/4, and 3/8-in. 9 GT 67118—Wt. 5 oz.Set \$3.99
7-PC. SET: 1/4, 3/8, 1/2, 5/8, 3/4, 1, 1 1/4-in. 9 GT 67117—Wt. 5 oz.Set \$2.99

Bits for masonry, non-ferrous metals

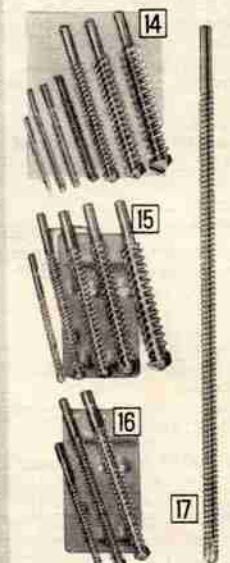

Accessories to Buff, Sand, Polish

(1) 10-pc. Sander-Buffer-Polisher Set.

For a variety of workshop, household chores. Includes angle drill head, for description see (9 GT 26271) below. . . threads on 1/4x24-chuck spindle or attaches to drill chuck; chuck adapter; 5-in. rubber back-up pad, lambs' wool polishing bonnet, 6 assorted sanding discs.

ORDERING INFORMATION:

9 GT 26272—Shpg. wt. 2 lbs. 4 oz.Set \$7.99

(2) CRAFTSMAN Angle Drill Head.

Excellent for hard-to-get-at areas. Fits 1/4 or 3/8-inch electric drills. Works at 90° angle. . . gives 2:1 gear ratio (half drill speed) for polishing, buffing; 1:1 ratio (high speed) for sanding. High-impact plastic housing, 2-position side handle.

ORDERING INFORMATION:

9 GT 26271—Shpg. wt. 1 lb. 10 oz. \$6.99

(3) CRAFTSMAN Fine Finishing Kit . . . 5-in. diameter.

For fine finishes on cars, new or refinished wood, metal. Includes three 5-inch diameter sanding discs, activator cement, lambs' wool polishing bonnet, rubber back-up pad. . . swivel joint flexes up to 30° angle; no center hole eliminates swirl marks. For 1/4 to 1/2-inch drills. No adapter required.

ORDERING INFORMATION:

9 GT 28476—Shpg. wt. 1 lb. 1 oz.Kit \$4.99

Tube of Activator Cement. Replacement for (3).

ORDERING INFORMATION:

9 GT 28473—Shpg. wt. 4 oz. \$7.99

(4) CRAFTSMAN Lambs' Wool Polishing Bonnets.

Fit over rubber back-up discs (not included).

SIZES AND ORDERING INFORMATION:

Catalog No.	Fits discs	Pile size	Shpg. wt.	Each
9 GT 2520	3 1/2 to 4 inches	1-inch	3 oz.	\$8.99
9 GT 2521	4 to 5 1/2 inches	1-inch	3 oz.	\$1.29
9 GT 2522	6 inches	1-inch	4 oz.	1.89
9 GT 2523	7 inches	1 1/2-inch	5 oz.	2.19

(5) Sanding Drum. Use with safelock or collet chuck; 1-in. face, 1/4-in. plain spindle, 1 1/2 in. long. Abrasive sleeve over expanding rubber drum.

DRUM SIZES AND ORDERING INFORMATION:

9 GT 2497—1 1/2-in. diameter. Wt. 5 oz. \$2.69
9 GT 2498—2 1/2-in. diameter. Wt. 8 oz. 3.39

(6) Sanding Sleeve. Use with (5); 1 1/2-in. diam.

GRITS AND ORDERING INFO: Package of 6.

9 GT 24421—Fine. Wt. 4 oz. Pkg. 99c

9 GT 24422—Medium. Wt. 4 oz. Pkg. 99c

9 GT 24423—Coarse. Wt. 4 oz. Pkg. 99c

Sanding Sleeve . . . 2 1/2-in. diameter. Medium grit.

ORDERING INFORMATION: Package of 6.

9 GT 24425—Shpg. wt. 4 oz. Pkg. 99c

(7) Shank-mounted Buff. 50-ply muslin. 3-in. diam.

ORDERING INFORMATION:

9 GT 64982—Shpg. wt. 5 oz. \$1.29

(8) Shank-mounted Polishing Wheel. Hard felt. Measures 1 1/2x1 inches; 1/4-inch shank.

ORDERING INFORMATION:

9 GT 64991—Shpg. wt. 3 oz. \$1.79

(9) Wire Wheel Brushes. For paint, burr removal, cleaning, polishing lathed work pieces. 3-inch diameter; 1/4-inch spindle.

WIRE GAUGES, ORDERING INFORMATION:

9 GT 64902—Fine. Shpg. wt. 6 oz. \$1.99

9 GT 64903—Coarse. Shpg. wt. 6 oz. 1.99

(10) Wire Cup Brushes. For cleaning, polishing, paint and burr removal. 1 1/4-inch diameter; 1/4-inch shank.

WIRE GAUGES AND ORDERING INFORMATION:

9 GT 64882—Fine. Shpg. wt. 5 oz. \$1.99

9 GT 64883—Coarse. Shpg. wt. 5 oz. 1.49

(11) Wire Cup Brush. Coarse wire for rust, paint removal, cleaning pitted surfaces. 2 3/4-inch diameter.

ORDERING INFORMATION:

9 GT 64961—Shpg. wt. 9 ounces \$1.99

(12) Carbon Removing Brush. For heavy carbon, paint, rust removal. 1-inch diameter; 1/4-inch plain shank.

ORDERING INFORMATION:

9 GT 64841—Shpg. wt. 5 oz. \$1.49

(13) CRAFTSMAN Twisted End Brush. Removes scale, corrosion, carbon, slag. Steel; 1 1/2-inch diameter.

ORDERING INFORMATION:

9 GT 64842—Shpg. wt. 9 oz. \$3.49

(14) CRAFTSMAN Doweling Jig. Holes for 3/4 thru 1/2-in. drills. Revolving turret, 4-inch capacity. 6 1/4x3 1/2-in. cast aluminum alloy frame.

ORDERING INFORMATION:

9 GT 4186—Shpg. wt. 2 lbs. 7 oz. \$13.99

(15) Steel Bit Case. For jobber-length set (9 GT 6705) on opposite page. Lifting lid raises bits. Sizes by 64ths; decimal equivalents. Gray. Meets Fed. Specs. GGG-C-116b for durability.

ORDERING INFORMATION:

9 GT 66852—Shpg. wt. 1 lb. 6 oz. \$2.99

(16) CRAFTSMAN All-steel Bit Case. Size and decimal equivalents. Tap drill table. Silver color luster and black enamel finish. Meets Fed. Specs. GGG-C-116b for durability.


CAPACITIES AND ORDERING INFORMATION:

For 29 Bits. 1/4 to 1/2-inch by 64ths.

9 GT 6678—Shpg. wt. 3 lbs. 3 oz. \$8.99

For 60-wire gauge Bits. Sizes 1 to 60.

9 GT 6679—Shpg. wt. 1 lb. 11 oz. \$6.99



Drill Bit Sharpeners

Extend the life of your twist drill bits

For use with CRAFTSMAN® and other drill bit brands . . . choose Electric or Drill-operated

(17 and 18) Sharpeners can save you time and help you avoid inconvenience. Resharpener dull or broken carbon and high-speed steel twist drill bits. Accept sizes 1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 5, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100. Not for resharpening carbide-tipped bits.

(17) Electric Bit Sharpener. As easy to use as an electric pencil sharpener . . . just place bit through proper-sized hole and place pressure on it. With motor that develops maximum 1/2 HP at 3000 rpm.

ELECTRICAL INFORMATION: Double-insulated . . . needs no grounding, 110-120-v., 60-Hz. AC. 75 watts. UL listed. 5-ft., 2-wire cord.

ORDERING INFORMATION:

Shipping weight 2 pounds 9 ounces.
9 GT 6682 \$26.99

(18) Drill-operated Bit Sharpener. Your own drill provides the power for the grinding wheel . . . tighten drill chuck around shaft at sharpener bottom, place bit through proper sized hole at sharpener top, turn on drill. Fits most makes of 1/4 or 3/8-in. drills (drill not incl.).

ORDERING INFORMATION:

Shipping weight 2 pounds 9 ounces.
9 GT 6680 \$13.99



Special Bits and Attachments

(19) CRAFTSMAN 5-pc. Screw Extractor Set. Nos. 1 thru 5 square shanks. Hardened steel alloy. With plastic case.

ORDERING INFORMATION:

9 GT 67372—Shpg. wt. 7 oz.Set \$4.99

(20) Screwdriver Bit and Socket Set.

For 1/4-in. and larger electric drills. Includes two spade bits with finders for Nos. 6 thru 10 slotted screws: Phillips bits Nos. 1, 2; adapter for 1/4-in. sq. drive; seven 6-pt. sockets (sizes 3/16 to 1/2-in.). 1/4-in. hex shank. With plastic case.

ORDERING INFORMATION: CRAFTSMAN except sockets.

9 GT 25651—Shpg. wt. 10 oz.Set \$5.99

Screwdriver Bit Set. As above except screwdriver bits only.

ORDERING INFORMATION:

9 GT 2565—Shpg. wt. 8 oz.Set \$3.99

(21) 12-inch Power Bit Extension. For 1/4-inch shank bits. For 1/4-in. or larger drill . . . 1/2-in. diameter socket.

ORDERING INFORMATION:

9 GT 2090—Shpg. wt. 10 oz. \$1.99

(22) Drum File. For 1/4-in. or larger electric drill or drill press. Measures 1 1/2x2 inches in diameter.

ORDERING INFORMATION:

9 GT 67725—Shpg. wt. 5 oz. \$3.67

(23) Hole Saw Attachment. Heat-treated steel. For wood, plastics, wallboard, plumbing. Use with mandrels (24) below.

SIZES AND ORDERING INFORMATION:

Catalog No.	Size	Shpg. wt.	Price
9 GT 2578	3/4-in.	4 oz.	\$2.99
9 GT 25781	1-in.	4 oz.	1.19
9 GT 25782	1 1/4-in.	4 oz.	1.29
9 GT 25783	1 1/2-in.	5 oz.	1.39
9 GT 25784	1 3/4-in.	5 oz.	1.39
9 GT 25785	1 7/8-in.	5 oz.	1.49
9 GT 25786	2-in.	5 oz.	1.49
9 GT 25787	2 1/4-in.	6 oz.	1.49
9 GT 25788	2 1/2-in.	6 oz.	1.59
9 GT 25789	2 3/4-in.	6 oz.	1.69

5-pc. Hole Saw Kit. Includes 1 1/4, 1 1/2, 1 3/4, 2 1/4 hole saw attachments in (23) above, Size 2 mandrel in (24) below.

ORDERING INFORMATION:

9 GT 28787—Wt. 15 oz.Kit \$7.99

(24) Mandrels for Hole Saw Attachments (23) above. 1/4-inch shanks. Size 1 for 3/4 to 1 1/4-in. saws. Size 2 for 1 1/4 to 2 3/4-in. saws. Includes pilot bit.

SIZES AND ORDERING INFO:

9 GT 2562—Size 1. Wt. 5 oz. \$2.99

9 GT 25621—Size 2. Wt. 5 oz. 3.49

(25) Heavy-duty Hole Saw Attachment. High-speed hole saws for cutting machineable steel, brass, bronze, plastics, wood, aluminum, iron. Use with mandrels (26) below. Knock-out slots.

SIZES AND ORDERING INFO:

Catalog No.	Size	Shpg. wt.	Price
9 GT 2577	3/4-in.	4 oz.	\$3.29
9 GT 25771	1-in.	4 oz.	3.29
9 GT 25772	1 1/4-in.	5 oz.	3.59
9 GT 25773	1 1/2-in.	5 oz.	3.89
9 GT 25774	1 3/4-in.	6 oz.	3.89
9 GT 25775	1 7/8-in.	6 oz.	3.99
9 GT 25776	2-in.	7 oz.	4.49
9 GT 25777	2 1/4-in.	6 oz.	4.99
9 GT 25778	2 1/2-in.	7 oz.	5.49
9 GT 25779	2 3/4-in.	8 oz.	6.49

(26) Mandrels for Hole Saw Attachments (25) above. Size 1 with 3/8-inch shank for 3/4 to 1 1/4-inch diameter saws. Size 2 with 1/2-inch shank for 1 to 2 1/4-inch diameter saws. Pilot drill bit.

SIZES AND ORDER INFO:

9 GT 25626—Size 1. Wt. 5 oz. \$3.29

9 GT 25627—Size 2. Wt. 6 oz. 4.29

Replacement Pilot Bit for (26).

ORDERING INFORMATION:

9 GT 25629—Wt. 3 oz. \$1.49

(27) CRAFTSMAN High-speed Countersink Bit. Machined steel, centerless ground. Cuts wood, metal. Five flutes, 82° angle; 1/4-in. shank.

SIZES AND ORDER INFO:

1/2-inch diameter.
9 GT 67161—Wt. 3 oz. \$2.99

3/4-inch diameter.
9 GT 67162—Wt. 4 oz. 3.69

1-inch diameter.
9 GT 67163—Wt. 4 oz. 4.29

(28) CRAFTSMAN Arbors. Hold grinding and wire wheels. With 1/2x20-thread shaft.

SIZES AND ORDERING INFORMATION:

Catalog No.	Flange	Shank	Weight	Price
9 GT 2594	1 1/4 in.	1/4 in.	8 oz.	\$1.19
9 GT 2590	2 in.	3/8 in.	15 oz.	1.89

(29) Hole Square. Groove in steel plate guides bits up to 3/4 inches in diameter.

ORDERING INFORMATION:

9 GT 2596—Shpg. wt. 5 oz. \$4.99

You get the accuracy needed for precision drilling plus lots more... see accessories on pages 16 and 17.



CRAFTSMAN® 3/8-inch Portable Drill Press

Double-insulated motor develops maximum 1/3 HP



Motorized Drill Press

\$69.50

without vise or bits

- Front-mounted slide action control for variable speeds from 1000 to 2000 rpm
- Automatic regulator helps maintain constant speed even under heavy work loads

(1) CRAFTSMAN Portable 3/8-in. Drill Press

MOTOR, HOUSING: Develops maximum 1/3 HP with variable speeds of 1000 to 2000 rpm. Automatic regulator maintains speed under heavy loads. Motor housing of high-impact polymer. Sleeve bearing construction.

HEAD, COLUMN, BASE: Locking depth gauge with 0 to 3 3/4-in. depth range. Safety lock on 18-in. steel column. Slotted die-cast aluminum base, rubber bushings. Handle mounts on right or left hand side of drill. Storage tray at top of press for drill bits measures 6x3 3/4x1-in. deep.

ELECTRICAL INFO: Double-insulated... no grounding needed. 110-120-v. 360-w. 60 Hz. AC. UL listed. 6-ft. 2-wire cord.

ORDERING INFORMATION: Vise and bits not included. 9 GT 1197—Shipping weight 9 pounds 2 ounces... \$69.50

(2) **Vise.** Bolt to drill press (bolts included). Steel-faced jaws open to 3 in. Cast-iron base. 8 in. long overall.

ORDERING INFORMATION: 9 GT 2757—Shipping weight 8 lbs. 2 oz. \$18.99

CRAFTSMAN® Drill Stands

Sturdy support for your drill from rigid tubular steel columns and die-cast aluminum bases



Heavy-duty Stand for all 1/4-, 3/8- and 1/2-inch Drills

\$44.99

without drill or bits



Stand (4) adjusts to horizontal



Medium-duty Stand with two positions for 1/4- and 3/8-inch pistol-grip drills

\$24.99

without drill, bits

(3) **Heavy-duty Drill Stand.** For all 1/4-, 3/8-, 1/2-in. drills (not included).

COLUMN, BASE: Tubular steel column 20 in. high. Adjustable rack-and-pinion depth control locks from 0 to 3 in. Throat depth 6 in. Die-cast aluminum base 7 1/2x7 1/2 in.

SWING-AWAY TABLE: Tilts and locks in any position.

ORDERING INFO: Unassembled. Wt. 17 lbs.

9 GT 25987C \$44.99

Stand (3) plus Drill 9 GT 1149 on p. 15. *See prices total \$114.49.* Wt. 27 lbs.

9 GT 11492C2 ... \$99.99

Stand (3) plus Drill 9 GT 1051 on p. 15. *See prices total \$84.98.* Wt. 21 lbs.

9 GT 10514C2 ... \$74.99

(4) **Medium-duty Drill Stand with two positions.** Drill in vertical position; sand, grind in horizontal. For 1/4-, 3/8-in. pistol-grip drills (not included).

COLUMN, BASE: Tubular steel column 18 in. high. Locking depth gauge from 0 to 2 1/2-inch with automatic return. Throat depth 4 1/2 inches. With protective grinding guard. Die-cast aluminum base measures 6x6 inches.

SWING-AWAY TABLE: Tilts, locks in any position.

ORDERING INFORMATION: Sent unassembled.

9 GT 25926—Shipping weight 9 lbs. 2 oz. \$24.99

Stand (4) plus Drill 9 GT 1051 sold on page 15. Stand unassembled. *Separate prices total \$64.98.*


9 GT 10515—Shpg. wt. 13 lbs. 2 oz. \$59.99

Stand (4) without swing-away table. Unassembled.

9 GT 25927—Shpg. wt. 8 lbs. 5 oz. \$19.99

Stand 9 GT 25927 above plus Drill 9 GT 1051 sold on page 15. Stand sent unassembled. *Separate prices total \$59.98.*

9 GT 10516—Shpg. wt. 12 lbs. 5 oz. \$54.99



Bench Stand for 1/4-, 3/8-inch drills

\$2.99

Bench Stand for 1/4-, 3/8-in. drills. Holds drill steady so both hands are free to position work. Use to wirebrush, sand, sharpen. Takes 4-inch diameter wheel (not included).

CONSTRUCTION: Polyethylene. Includes bolts for mounting to workbench.


ORDERING INFORMATION: Drill, wheel not included.

9 GT 25911—Shipping weight 1 lb. 6 oz. \$2.99

Cord Lock. Helps prevent your portable electric tools from disconnecting from extension cords. For use with all types of electric tools and appliances. Plastic.

ORDERING INFORMATION:

9 GT 2595—Wt. 4 oz. 49c

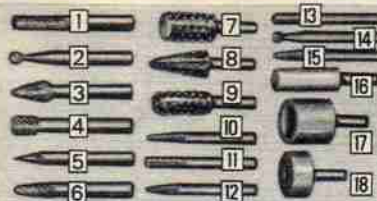

Individual Cutters and Points for Rotary Grinders

(1 thru 6) **Individual CRAFTSMAN Rotary Cutters.** High-speed steel. Type M-2. For wood, plastic, metal (except hardened steel). 1/4-in. shanks. Meets Fed. Specs. GGG-F-00340 for hardness and accuracy. ORDER INFO: Shpg. wt. each 3 oz.

Key	Catalog No.	Diam.	Shape	Price
(1)	9 GT 2966	1/4 in.	Cylindrical	\$2.19
(2)	9 GT 2967	1/4 in.	Spherical	2.19
(3)	9 GT 2970	3/8 in.	Tree pointed	3.29
(4)	9 GT 2968	3/8 in.	Elliptical	3.29
(5)	9 GT 2971	1/4 in.	Conical	2.29
(6)	9 GT 2969	1/4 in.	Tree Radius	2.19

CRAFTSMAN 6-pc. Rotary Cutter Set. Separate prices total \$15.44. Incl. 1 each of items (1) thru (6) above.

ORDERING INFORMATION:
9 GT 2965—Wt. 6 oz. Set \$11.99

(7 thru 9) **Rotary Cutters.** Steel. Use on wood or plastic. With 1/4-inch shanks. Choose rasp or file.

ORDERING INFORMATION:
Shipping weight 5 ounces.

(7)	9 GT 64771—Rasp*	\$1.39
	9 GT 64781—File#	1.29
(8)	9 GT 64773—Rasp*	1.39
	9 GT 64783—File#	1.29
(9)	9 GT 64772—Rasp*	1.39
	9 GT 64782—File#	1.29

*From W. Germany #From England

(19) **Stand and Holder.** Measures overall 4 1/2 x 2 x 5 inches long. Mounts easily.

ORDERING INFORMATION: For rotary grinder above right.
9 GT 25846—Shipping weight 4 pounds 9 ounces \$21.99

(10 thru 15) **CRAFTSMAN Solid Carbide Burrs.** Harder than ordinary steel. For tight places. 1/8-in. shanks. ORDERING INFORMATION:
Shpg. wt. each 2 oz. Each \$3.49

Key	Catalog No.	Shape
(10)	9 GT 25842	Tree shape
(11)	9 GT 25841	Cylindrical
(12)	9 GT 25843	Conical
(13)	9 GT 25844	Cylindrical radius
(14)	9 GT 25845	Ball shape
(15)	9 GT 25846	Tree shape

Set of 9 assorted mounted Grinding Points. Heads of vitrified aluminum oxide. For grinding, polishing, deburring. Sizes up to 1-in. diam., 1/2 up to 1 1/4 in. long. Also 1-in. diam. spherical points. 1/4-in. shank.

ORDERING INFORMATION:
9 GT 6471—Shpg. wt. 14 oz. Set \$4.99

(16 thru 18) **Individual Mounted Grinding Points.** Heads made of vitrified aluminum oxide mounted on 1 x 1/4-in. steel shafts. Use for finishing or die cutting.

ORDERING INFORMATION:
Each \$5.9c


Key	Catalog No.	Diam.	Lgth.	Wt.
(16)	9 GT 64714	1/2 in.	1 1/2 in.	3 oz.
(17)	9 GT 64719	1 in.	1 in.	4 oz.
(18)	9 GT 64717	1 in.	1/2 in.	4 oz.



Grinder alone
\$64.99

CRAFTSMAN® Variable-speed Rotary Grinder and Accessory Kit

Grinder and Kit
\$74.99

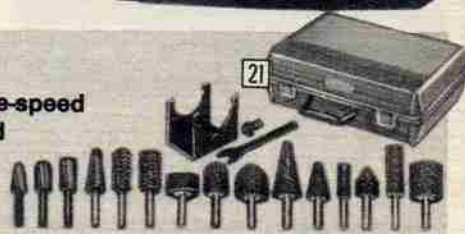

(20) **Variable-speed Rotary Grinder alone.** For grinding metal, wood, plastic. MOTOR, BEARINGS: Permanent magnetic motor develops maximum 1/4 horsepower. Variable-speed dial adjustment lets you adjust speeds from 13,000 to 24,000 rpm (no-load speeds). Permanently lubricated ball bearings.

CHUCK: Two collet-type chuck grips 1/8, 1/4-inch diameter shanks. HOUSING: Lightweight housing of aluminum and heat-resistant polyester . . . contoured to fit your hand so you can work for long periods of time without tiring. 10 inches long overall.

ELECTRICAL INFORMATION: Double-insulated . . . needs no grounding. Operates on 110-120-v., 264-w., 60-Hertz AC. UL listed. Includes 6-foot, 2-wire neoprene cord.

ORDERING INFO: See Warranty on page 15. Wear safety goggles . . . see page 35.

9 GT 1734—Shipping weight 5 pounds \$64.99

Grinder like (20) above, except single no-load speed of 24,000 rpm.

9 GT 1733—Shipping weight 4 pounds 12 ounces \$54.99

(21) **20-piece Variable-speed Rotary Grinder Kit.** Kit includes grinder 9 GT 1734 described above plus 9 grinding points, 3 rotary rasps, 3 rotary files, wrench, collet, bench stand. Permanex® carrying case: 12 1/2 x 9 x 4 1/2 inches high.

ORDERING INFO: See warranty on page 15. Wear safety goggles . . . see page 35.
9 GT 17342—Shipping weight 8 pounds Kit \$74.99

(22) CRAFTSMAN® 14-piece Rotary Hobby Tool Kit \$25.99

A versatile tool with 30,000 rpm no-load speed that lets you polish, sand, carve, shape.

HOUSING: Strong lightweight plastic (weighs 9 ounces) and compact (6 inches).

KIT INCLUDES: 6 cutting wheels, one drum sander, one polishing wheel, one emery wheel point, two mandrels, one silicon-carbide grinding wheel, and one high-speed steel drill bit with 1/8-inch shank. Instr.

ELECTRICAL INFO: Incl. 6-foot, 3-wire cord. Operates on 115-volt, 60-watt, 60-Hertz, AC. UL listed.

ORDERING INFO: See warranty on page 15. Also protect your eyesight . . . wear safety goggles, see page 35.

9 GT 25171—Shpg. wt. 1 lb. 10 oz. Kit \$25.99

(23) Chain Saw Sharpener Kit

Set of 4 abrasive mandrels. One of the set will fit most any chain saw made in U.S. Use up to 45,000 rpm.

CONSTRUCTION: Aluminum oxide abrasive. 1/4-inch shank fits all rotary hobby tools.

ORDERING INFORMATION:
9 GT 6472—Shipping weight 3 ounces Kit \$2.99

(24) CRAFTSMAN® Electric Engraver

Identifies your property . . . discourages thefts. Also use as a hobby tool . . . engraves patterns and designs on a variety of projects. Powerful .15 amp. motor.

HOUSING, TIP: Break-resistant Lexan® plastic housing. Tungsten carbide tip for marking glass, plastic, brass. Knob adjusts length of stroke.

MOTOR, SWITCH: .15 amp motor delivers 7200 strokes per minute. Slide-action on-off switch.

ELECTRICAL INFORMATION: Operates on 110-120-volt, 20-watt, 60-Hertz, AC. UL listed.

ORDERING INFORMATION: See warranty on page 15. Wear safety goggles . . . see page 35.

9 GT 4297—Shipping weight 1 lb. 1 oz. \$13.99

Craftsman electric engraver (not shown) has hardened steel tip for use on wood, plastic, leather, and soft metals. .080 amp motor. No on-off switch.

ORDERING INFORMATION:
9 GT 4290—Shipping weight 13 ounces \$7.99

Replaceable tips for engravers above.

ORDERING INFORMATION:
9 GT 52839—Shpg. wt. 3 oz. (tungsten carbide) \$2.49
9 GT 52835—Wt. 3 oz. (hardened steel) 1.59

Li'l Crafty® Deluxe Rotary Hobby Tool Kit

Make models, sculpt, finish small objects
\$37.99 Kit

(25) **CRAFTSMAN®.** A versatile tool with 24,000 rpm no-load speed that lets you perform all types of hobby work.

HOUSING: Strong, lightweight plastic housing lets you use this tool for long periods of time without tiring. 8 inches long. With hanging bail for handy storage.

KIT INCLUDES: 2 mandrels; 1 bud burr; 1 cylinder burr; 1 abrasive ball, disc, 2 cylinders; 1 dressing stone; 2 abrasive cones; 1 drum sander; 4 bands for sander; pumice wheel; 1 square edge; 5 separating discs; wheel brush; rag buff wheel; collet. Permanex® polyethylene carrying case. Takes accessories with 1/8 or 3/32-in. shafts.

ELECTRICAL INFORMATION: 6-foot, 3-wire cord. Operates on 110-12-volt, 88-watt, 60-Hertz AC. UL listed.

ORDERING INFORMATION: See Warranty on page 15. Wear safety goggles . . . see page 35.

9 GT 25165—Shipping weight 3 pounds Kit \$37.99

(26 thru 48) Accessories for Li'l Crafty Hobby Tool Kit also for Rotary Hobby Shaper on page 27.

Key	Catalog No.	Description	Size (inch)	Wt.	Price
(26)	9 GT 25104	Cup Bristle Brush	1/2 diam.	2 oz.	89c
(27)	9 GT 25105	Mandrel	3/32 shank	2 oz.	89c
(28)	9 GT 25106	Mandrel	1/8 shank	2 oz.	89c
(29)	9 GT 25119	Circular Burr	3/8 diam.	2 oz.	\$1.59
(30)	9 GT 25113	Bud Burr	3/8 diam.	2 oz.	1.59
(31)	9 GT 25114	Cylinder Burr	1/2 diam.	2 oz.	1.59
(32)	9 GT 25167	Abrasive Cone	1/2 shank	5 oz.	89c
(33)	9 GT 25166	Abrasive Ball	1/2 shank	6 oz.	89c
(34)	9 GT 25122	Abrasive Disc	1/2 diam.	2 oz.	89c
(35)	9 GT 25123	Abrasive Cylinder	3/4 diam.	2 oz.	89c
(36)	9 GT 25124	Abrasive Cyl.	3/4 diam.	2 oz.	89c
(37)	9 GT 25125	Dressing Stone	3/8 x 1/2	2 oz.	89c
(38)	9 GT 25121	Abrasive Cone	3/4 diam.	2 oz.	89c
(39)	9 GT 25159	Drum Sander	3/2 diam.	6 oz.	\$1.29
(40)	9 GT 25164	Bands for (39)	1/4 diam.	5 oz.	89c
(41)	9 GT 25117	Wheel Pumice	3/8 diam.	2 oz.	89c
(42)	9 GT 25118	Abrasive Wheel	1 diam.	2 oz.	89c
(43)	9 GT 25111	Square Edge	3/8 diam.	2 oz.	89c
(44)	9 GT 25109	Circular Saw	3/4 diam.	2 oz.	\$1.29
(45)	9 GT 25107	Rubber Wheel	1/2 diam.	2 oz.	89c
(46)	9 GT 25108	Separating Discs	3/8 diam.	2 oz.	89c
(47)	9 GT 25103	Wheel Brush	3/4 diam.	2 oz.	89c
(48)	9 GT 25102	Rag Buff Wheel	1 diam.	2 oz.	89c

*Pkg. of 2 *Pkg. of 3 *Pkg. of 10 (5 med.; 5 coarse)



COMPBK LAEJ02 Sears 19



ABRASIVES

for machine or hand sanding



Sanding Belts for portable and bench-type belt sanders

Aluminum oxide abrasive on all belts. Long lasting; fast cutting. Cloth back. 1-piece. For portable and bench-type sanders and (1) below. For wood, metal or plastic surfaces.

GRIT, SIZE AND ORDERING INFORMATION:

Grit	Catalog Number	Wt. oz.	Price each	Price for 10
3x21 inches.				
X-Fine	9 GT 22304	3	79c	\$7.50
Fine	9 GT 22301	3	79c	7.50
Medium	9 GT 22302	4	79c	7.50
Coarse	9 GT 22303	4	79c	7.50
X-Coarse	9 GT 22305	6	79c	7.50

4x24 inches. Best for wood.				
X-Fine	9 GT 22332	4	\$1.09	10.50
Fine	9 GT 22333	4	1.09	10.50
Medium	9 GT 22334	5	1.09	10.50
Coarse	9 GT 22335	6	1.09	10.50
X-Coarse	9 GT 22336	7	1.09	10.50

4x24 inches. Best for metal.				
Fine	9 GT 22337	4	\$1.09	10.50
Medium	9 GT 22338	5	1.09	10.50
Coarse	9 GT 22339	6	1.09	10.50

4x36 inches.				
Fine	9 GT 22151	5	\$1.29	12.00
Medium	9 GT 22152	6	1.29	12.00
Coarse	9 GT 22153	7	1.29	12.00

6x48 inches.				
Fine	9 GT 21871	8	\$1.99	18.90
Medium	9 GT 21872	9	1.99	18.90
Coarse	9 GT 21873	12	1.99	18.90

3x27 inches.				
X-Fine	9 GT 22315	4	99c	9.50
Fine	9 GT 22311	4	99c	9.50
Medium	9 GT 22312	4	99c	9.50
Coarse	9 GT 22313	5	99c	9.50

Sanding Sheets cut to size for pad sanders

For use on wood, metal and plastic for machine or hand sanding.

Standard. Aluminum oxide, paper back.

GRIT, SIZE, ORDERING INFORMATION:

Grit	Catalog Number	Shipping weight	Package
3x7 1/4 inches. Package of 18.			
Fine	9 GT 27461	3 oz.	79c
Medium	9 GT 27462	4 oz.	79c
Coarse	9 GT 27463	5 oz.	79c

3 1/2 x 9 inches. Package of 12.			
Fine	9 GT 25131	3 oz.	79c
Medium	9 GT 25132	4 oz.	79c
Coarse	9 GT 25133	5 oz.	79c
X-Coarse	9 GT 25134	7 oz.	89c

4 1/2 x 11 inches. Package of 12.			
Fine	9 GT 27401	4 oz.	89c
Medium	9 GT 27402	4 oz.	89c
Coarse	9 GT 27403	6 oz.	89c
X-Coarse	9 GT 27404	10 oz.	89c

Non-clogging (non-loading). Zinc stearate coated. . . last longer than standard sheets above. Fine grits are silicon carbide; medium and coarse grits are aluminum oxide. Paper back.

GRIT, SIZE, ORDERING INFORMATION:

Grit	Catalog Number	Shpg. wt.	Package
3 1/2 x 9 inches. Package of 12.			
Fine	9 GT 67645	5 oz.	99c
Medium	9 GT 67646	6 oz.	99c
Coarse	9 GT 67647	9 oz.	99c

4 1/2 x 11 inches. Package of 12.			
Fine	9 GT 67635	7 oz.	\$1.19
Medium	9 GT 67636	8 oz.	1.19
Coarse	9 GT 67637	11 oz.	1.19

Sanding Discs for portable and bench-type sanders

For use on wood, metal or plastic.

GRIT, SIZE AND ORDERING INFORMATION:

Diam.	Hole	Grit	Pkg. of	Catalog Number	Wt. lbs. oz.	Price Pkg.	Price for 5 pkgs.
Aluminum Oxide, paper-backed							
4-in.	1/4-in.	Asstd.*	6	9 GT 2544	4	59c	\$2.80
5-in.	None	X-Fine	6	9 GT 26051	3	79c	3.70
		Fine	6	9 GT 26052	3	79c	3.70
		M-Fine	6	9 GT 26053	3	79c	3.70
5-in.	1/4-in.	Coarse	3	9 GT 2542	4	89c	3.20
6-in.	1/4-in.	Asstd.*	6	9 GT 2543	4	79c	3.70
		Fine	6	9 GT 25321	5	99c	4.70
		Med.	6	9 GT 25322	7	99c	4.70
		Coarse	4	9 GT 25323	6	99c	4.70
7-in.	1/4-in.	Asstd.*	6	9 GT 25325	5	99c	4.70
8-in.	None	Fine	6	9 GT 2531	8	\$1.29	6.00
		Med.	6	9 GT 25251	7	1.29	6.00
		Coarse	5	9 GT 25252	8	1.29	6.00
8-in.	3-in.	Asstd.*	6	9 GT 25253	11	1.29	6.00
9-in.	None	Fine	6	9 GT 22732	9	1.39	6.50
		Med.	6	9 GT 25302	7	1.49	7.00
		Coarse	5	9 GT 25303	13	1.49	7.00
10-in.	3-in.	Asstd.*	6	9 GT 22731	13	2.19	10.50

Aluminum Oxide, fiber-backed. . . last longer than paper-backed discs above.

6-in.	1/4-in.	Med.	10	9 GT 25297	14	\$4.49	\$21.35
7-in.	1/4-in.	Fine	10	9 GT 25299	1	4.79	22.70
		Med.	10	9 GT 25291	1	4.79	22.70
		Coarse	10	9 GT 25292	1	5.29	25.00
9-in.	1/4-in.	Fine	10	9 GT 25287	2	3.29	35.00
		Med.	10	9 GT 25288	2	7.49	35.00
		Coarse	10	9 GT 25289	2	7.79	37.00

Silicon Carbide, open coat

6-in.	1/4-in.	Coarse	3	9 GT 25324	5	99c	\$4.70
-------	---------	--------	---	------------	---	-----	--------

Tungsten Carbide, bonded to thin steel

5-in.	1/4-in.	Medium	1	9 GT 30091	4	\$1.49	
		Coarse	1	9 GT 30092	4	1.49	
6-in.	1/4-in.	Medium	1	9 GT 30093	4	1.59	
		Coarse	1	9 GT 30094	4	1.59	

Aluminum Oxide, pressure-sensitive with adhesive back

8-in.	None	Fine	6	9 GT 25381	9	\$3.99	
		Medium	6	9 GT 25382	11	3.99	
		Coarse	6	9 GT 25383	13	3.99	

*2F, 2M, 2C *3F, 3M


Sanding Sheets for soft and hard woods, metal and water sanding



CRAFTSMAN Sander Kits



Sanding Drum



Pressure-sensitive Cement

Quality-made sanding sheets with abrasives bonded to strong backings.

TYPE, GRIT AND ORDERING INFORMATION:

Sheet Type	Size	Grit	Catalog Number	Pkg. of	Wt. lbs. oz.	Pkg.
Aluminum Oxide, paper-backed. For hardwood.						
	9x11 in.	X-Fine	9 GT 27421	100	4 13	\$11.99
	9x11 in.	Fine	9 GT 27422	100	6 7	11.99
	9x11 in.	Medium	9 GT 27423	100	10 2	11.99
	9x11 in.	Coarse	9 GT 27424	50	7 10	7.49
Aluminum Oxide, cloth-backed. For metal.						
	9x11 in.	Fine	9 GT 67821	50	4 10	16.99
	9x11 in.	Medium	9 GT 67822	50	6 2	16.99
	9x11 in.	Coarse	9 GT 67823	50	6 15	17.99
Garnet paper. For all woods.						
	9x11 in.	X-Fine	9 GT 67941	100	4 15	10.99
	9x11 in.	Fine	9 GT 67942	100	6 5	10.99
	9x11 in.	Medium	9 GT 67943	100	10 2	10.99
	9x11 in.	Coarse	9 GT 67944	50	7 10	7.99
Emery Cloth. For metal.						
	9x11 in.	Fine	9 GT 67925	50	3 4	13.99
	9x11 in.	Medium	9 GT 67926	50	4	13.99
	9x11 in.	Coarse	9 GT 67927	50	4 15	13.99
Flint Sandpaper. For soft woods only.						
	9x11 in.	X-Fine	9 GT 67945	100	2 12	6.99
	9x11 in.	Fine	9 GT 67946	100	3 13	6.99
	9x11 in.	Medium	9 GT 67947	100	5 7	6.99
	9x11 in.	Coarse	9 GT 67948	50	4 12	3.99
Silicon Carbide Water-sand Finishing Paper.						
	9x11 in.	Super-Fine	9 GT 30121	100	2 12	15.99
	9x11 in.	X-Fine	9 GT 30122	100	2 15	15.99
	9x11 in.	Med. Fine	9 GT 30123	100	3 5	15.99
Non-loading Sandpaper						
	9x11 in.	X-Fine	9 GT 67991	100	3 8	15.99
	9x11 in.	Fine	9 GT 67992	100	3 8	15.99
	9x11 in.	Medium	9 GT 67993	100	4 2	15.99
	9x11 in.	Coarse	9 GT 67994	50	4 12	8.99

(1) Flex Face Hand Sander Kit

Polyurethane foam over wood frame. Sharp end for corner sanding, round end for general sanding. Spring tension holds belt in place. Includes 1 medium-grit 3x21-inch sanding belt.

ORDERING INFORMATION:
Order extra sanding belts above left.
9 GT 3682—Wt. 12 oz. Kit \$1.99

(2) Block Hand Sander Kit

Molded rubber. Ideal for sanding wood or metal. Includes six 2 1/4 x 9-in. sanding sheets: 2 fine, 2 med., 2 coarse.

ORDERING INFORMATION:
Order extra 9x11-inch sheets at left.
9 GT 3683—Wt. 1 lb. Kit \$2.49

(3) Steel Wool

Choice of textures ranging from very fine to coarse.

ORDERING INFORMATION:
Comes in package of 16 pads.

Texture	Catalog No.	Wt.	Pkg.
Very Fine#0000	9 GT 67919	14 oz.	\$1.99
Extra-Fine#0000	9 GT 67911	1 lb. 1 oz.	1.79
Fine#0	9 GT 67912	1 lb. 1 oz.	1.39
Medium#1	9 GT 67913	1 lb. 1 oz.	1.39
Med. Coarse#2	9 GT 67914	1 lb. 1 oz.	1.39
Coarse#3	9 GT 67915	1 lb. 1 oz.	1.39

(4) Sanding Drum for use on radial saws

3-inch face, 2 1/4-inch diameter. Screws on 1/2-inch diameter. Expandable rubber drum. With medium-grit sanding sleeve.

ORDERING INFO: Wt. 1 lb. 6 oz.
9 GT 25246 \$4.99

Sanding Sleeves (not shown)
Use with sanding drum above.

ORDERING INFORMATION:

Fine grit.
9 GT 25221—Wt. 3 oz. 59c

Medium grit.
9 GT 25222—Wt. 3 oz. 59c


Coarse grit.
9 GT 25223—Wt. 3 oz. 59c

(5) Pressure-sensitive Cement

Use for holding sanding discs to metal plates. Stays tacky. Discs peel off after use. 8-oz. plastic squeeze bottle.

ORDERING INFORMATION:
9 GT 2220—Wt. 12 oz. \$1.29

CRAFTSMAN® Finishing and Grinding Wheels for use with bench grinders

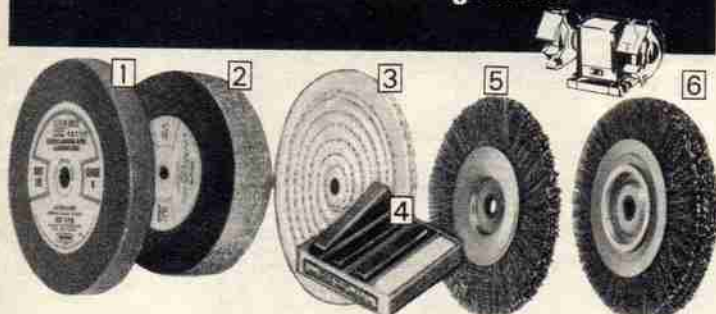

(1) Grinding Wheels

USES: Fine grit for knives, keen-edge tools, finish-grinding, polishing. Medium-fine grit for axes, wood-cutting tools, preparation for finishing. Medium-coarse grit for machine shop use, fast stock removal.

CONSTRUCTION: Vitrified aluminum-oxide grains. Meet American Standards Assn. safety standards. 3/4-in. center hole. Bushings for 3/8, 1/2, 5/8-in. shafts with 4-in. wheels. Others with 1/2, 3/8-in. bushings.

GRIT, SIZE, ORDERING INFORMATION: See safety rules at right.

Size	Min. shaft	Catalog Number	Wt. lbs. oz.	Each	5 for
Fine 100-grit					
4x1/2	3/8 in.	9GT64313	1 1/2	\$1.59	\$7.15
5x3/4	1/2 in.	9GT64317	1 1/2	2.49	11.20
6x1/2	3/4 in.	9GT64319	1 1/2	2.69	12.10
6x3/4	1/2 in.	9GT64321	1 1/2	2.99	13.45
7x1	3/4 in.	9GT64353	3 1/2	3.99	17.95
8x1	3/4 in.	9GT64354	4 1/2	5.29	23.80

Medium-fine, 60-grit					
4x1/2	3/8 in.	9GT64203	1 1/2	\$1.59	\$7.25
5x3/4	1/2 in.	9GT64207	1 1/2	2.49	11.20
6x1/2	3/4 in.	9GT64209	1 1/2	2.69	12.10
6x3/4	1/2 in.	9GT64211	1 1/2	2.99	13.45
7x1	3/4 in.	9GT64214	3 1/2	3.99	17.95
8x1	3/4 in.	9GT64355	4 1/2	5.29	23.80

Medium-coarse, 36-grit					
4x1/2	3/8 in.	9GT64351	1 1/2	\$1.59	\$7.15
5x3/4	1/2 in.	9GT64356	1 1/2	2.49	11.20
6x1/2	3/4 in.	9GT64352	1 1/2	2.69	12.10
6x3/4	1/2 in.	9GT64232	1 1/2	2.99	13.45
7x1	3/4 in.	9GT64235	3 1/2	3.99	17.95
8x1	3/4 in.	9GT64236	4 1/2	5.29	23.80

Buffing Wheels, Buffing Compound, Wire Wheels

(3) CRAFTSMAN Buffing Wheels
Spiral-sewn muslin with raked edges. 30 layers. Thread count 64x64 threads per in. Fits 1/2 or 3/8-in. shafts. Use 2 or more in tandem for wide work areas.

SIZES, ORDERING INFO: Use with (4).

Cat. No.	Diameter	Shpg. wt.	Each
9GT 64833	4 inches	3 ounces	.99c
9GT 64831	6 inches	6 ounces	\$1.89
9GT 64832	8 inches	8 ounces	2.49

(4) CRAFTSMAN Buffing Compound

Set of four 3-oz. bars. One each: emery (black), red rouge, white, Tripoli (brown).

ORDERING INFO: Use with (3) above. 9 GT 2896—Wt. 1 lb. 8 oz. Set \$1.49
CRAFTSMAN Buffing Compound for metal, plastic (not shown), 3-ounce bar.

ORDERING INFO: Use with (3) above. 9 GT 2865—Wt. 7 oz. Bar 79c
White Rouge Buffing Compound (not shown). For stainless steel, aluminum, cast brass, chrome. 3-oz. bar.
ORDERING INFORMATION:
9 GT 2860—Wt. 8 oz. Bar 79c

(5) CRAFTSMAN Wire Wheels

USES: Remove rust, paint. Use 2 or more in tandem for wide work areas.

SIZES, ORDERING INFO: 1/2-in. center holes also bushed for 3/8-in. shaft. 5/8-in. center holes bushed for 1/2-in. shaft.

Catalog Number	Diam. in.	Hole in.	Width in.	Shpg. wt. lbs. oz.	Each
Coarse					
9GT64811	4	1/2	3/8	11	\$1.99
9GT64812	6	3/4	1/2	15	2.29
9GT64816	7	3/4	1/2	1	3.29
9GT64813	8	3/4	1/2	1	10 3.49
Fine					
9GT64823	4	1/2	3/8	11	\$2.29
9GT64824	6	3/4	1/2	15	2.69
9GT64815	7	3/4	1/2	1	3.69
Wide-face Coarse Wheels					
9GT64834	6	3/4	1	12	\$4.79
9GT64835	8	3/4	1 1/2	3	6.99

(6) CRAFTSMAN Commercial Production Wire Wheel

CONSTRUCTION: Two sections: heavy-duty steel and carbon steel wire. 6-inch diameter face, 3/4 inch thick, 3/8-inch arbor hole.

ORDERING INFORMATION:
9 GT 64814—Wt. 1 lb. 14 oz. \$6.99

SIZES, ORDERING INFORMATION:

Diam.	Catalog No.	Shpg. wt.	Each	10 for
Aluminum oxide for cutting steel				
6 in.	9 GT 64883	6 oz.	\$2.49	\$22.49
7 in.	9 GT 64884	7 oz.	2.99	26.99
8 in.	9 GT 64885	9 oz.	3.49	31.49
Silicon carbide for cutting bricks, concrete, bronze, brass, plastic				
6 in.	9 GT 64861	6 oz.	2.49	\$22.49
7 in.	9 GT 64862	7 oz.	2.99	26.99
8 in.	9 GT 64863	9 oz.	3.49	31.49

CRAFTSMAN® Tool Cases

Surround your portable power tool with a double wall of tough polyethylene... won't rust, dent or crack, even in extreme heat or cold from -84° to +185°F.

Tough Permanex® polyethylene. Textured finish resists soil, including oil, acid and alkaline.

(7) Router Case. Slots in lid to hold bits. Measures 12 1/2 x 10 5/8 x 7 1/4 in. ORDERING INFO: Shpg. wt. 3 lbs. 9 GT 1458 ... \$9.99

(8) Electric Drill Case. Holds 1/4, 3/8 and some compact 1/2-inch drills. Compartment for bits, sanding discs. 15 1/2 x 8 1/4 x 8 1/4 inches high. ORDERING INFO: Wt. 2 lbs. 4 oz. 9 GT 1451 ... \$9.99


(9) Multiple-tool Case. Holds 1, 2 or 3 tools at once, depending on size of tools. Fits sanders, polishers, electric hand saws, drills, routers and most portable power tools except 9-1148, 9-1810, 9-1811, 9-1813 or 9-1113... for these use (11) below. Measures 21 1/2 x 12 1/2 x 12 1/2 in. high. ORDERING INFO: Shpg. wt. 11 lbs. 9 GT 1457C ... \$19.99

(10) Circular Saw Case. Fits all Sears portable circular saws except 9-1187 and 9-1188... for these use (11) below. Compartment for blades, dado set, cut-off wheels. 15 1/2 x 12 1/2 x 10 1/2 in. high. ORDERING INFO: Shpg. wt. 4 lbs. 9 GT 1453 ... \$12.99

(11) Single-tool Case. Holds power planer, standard 1/2-inch drill, 3-inch belt sander, 4 1/2 x 9-inch pad sander, reciprocating saw, electric impact tool or 6-inch disc sander. 17 3/4 x 9 3/4 x 10 1/2 inches. ORDERING INFO: Wt. 3 lbs. 6 oz. 9 GT 1454 ... \$12.99

(12) Sabre Saw or Pad Sander Case. Holds sabre saw or 3 1/2 x 7-inch pad sander except 9-1165... uses (11) above. Compartment for sand paper, blades and edge guides. Measures 14 1/2 x 9 1/4 x 10 1/2 in. ORDERING INFO: Wt. 2 lbs. 12 oz. 9 GT 1452 ... \$10.99

(13) Electric Impact Tool Case. Compartment for accessories. Measures 16 x 13 1/2 x 5 inches high. ORDERING INFO: Wt. 3 lbs. 14 oz. 9 GT 1456 ... \$9.99

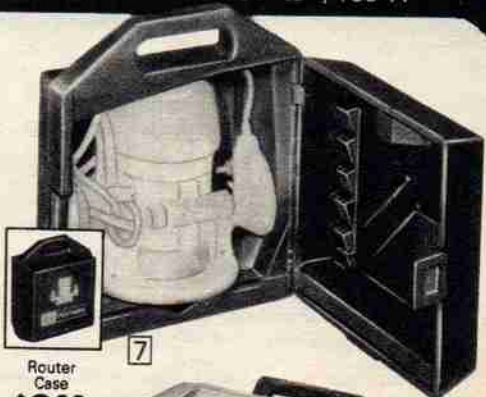

OUR MOST ACCURATE MITER BOXES

Like all of our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these two miter boxes so outstanding:

Both accuracy-tested to within .005 of an inch on 6-inch cuts

- (A) Hangers hold saw above the workpiece... hands are free to position workpiece accurately
- (B) Clamps with exclusive design hold workpiece snug against the back

- (C) Beds machine-milled at precise 90° angles so workpiece rests squarely to provide true-to-angle cutting
- (D) Kromedge® (chrome-plated) alloy steel saws give long-lasting sharpness... 11 teeth per inch, hollow ground for fine cuts
- (E) Sturdy legs widely spread for stability

Our most popular has 26x4-inch Kromedge® Saw
\$69.50

(1) Miter Box with 26x4-inch Kromedge® Saw


CUTTING RANGE: Maximum depth 4 inches. Takes pieces to 8 3/4 in. wide at 90°, 6 in. wide at 45°. Cuts at any angle from 45° left or right.

SAW: 26x4-in. Kromedge® alloy steel blade for long-lasting sharpness. Hollow-ground teeth 11 points per in. for fine cuts. Hardwood handle.

SAW GUIDES: 11 1/2 in. apart with 8 steel rollers for smooth, accurate cuts. Adjust to any saw thickness. Pre-tested at factory for accuracy. Two 1 1/2-in. diameter guide rods. Hanger allows two-hand positioning of work. Turn 2 levers to release saw from hanger.

BASE: Rugged 1-piece base and back of cast aluminum alloy 18 in. long. Depth stop protects saw teeth. Our exclusive clamp attaches on right or left side of back... foot fits various wood shapes to secure workpiece. Off-set steel legs with mounting holes... legs widely spaced for stability. Overall: 18x10 1/4x14 1/4 in. high.

ORDERING INFORMATION:
Shipping weight 17 pounds.
9 GT 36303C \$69.50

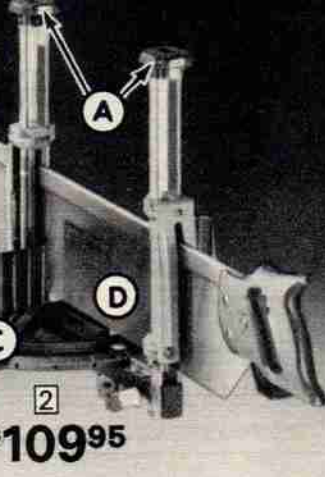

Our finest has 28x5-inch Kromedge® Saw... plus

- Tap-cap saw release... just tap caps to release saw quickly
- Easy take-down guide rods... slip back in, hold their accuracy

(2) Miter Box with 28x5-inch Kromedge® Saw


CUTTING RANGE: Maximum depth 5 in. Takes pieces to 8 3/4 in. wide at 90°, 6 in. wide at 45°. Cuts at any angle 45° left or right.

SAW: 28x5-in. Kromedge® alloy steel blade for long-lasting sharpness. Hollow-ground teeth, 11 points per in. for fine cuts. Hardwood handle.

SAW GUIDES: 11 1/2 in. apart with 10 steel rollers for smooth, accurate cuts. Adjust to any saw thickness. Factory pre-tested for accuracy. Two 3/4-in. half-round rods support guides... loosen screws to remove. Hanger holds saw, allows 2-hand positioning of work. Tap caps on top to release saw.

BASE: Rugged 1-piece base, back of cast aluminum alloy 18 in. long. Depth stop protects saw teeth. Our exclusive clamp attaches on left or right side of back... foot fits various wood shapes to secure workpiece. Off-set cast aluminum legs, mounting holes... legs widely spaced for stability. Overall: 18x12 3/4x17 1/4 in. high.

ORDERING INFORMATION:
9 GT 36505C—Wt. 27 lbs. ... \$109.95

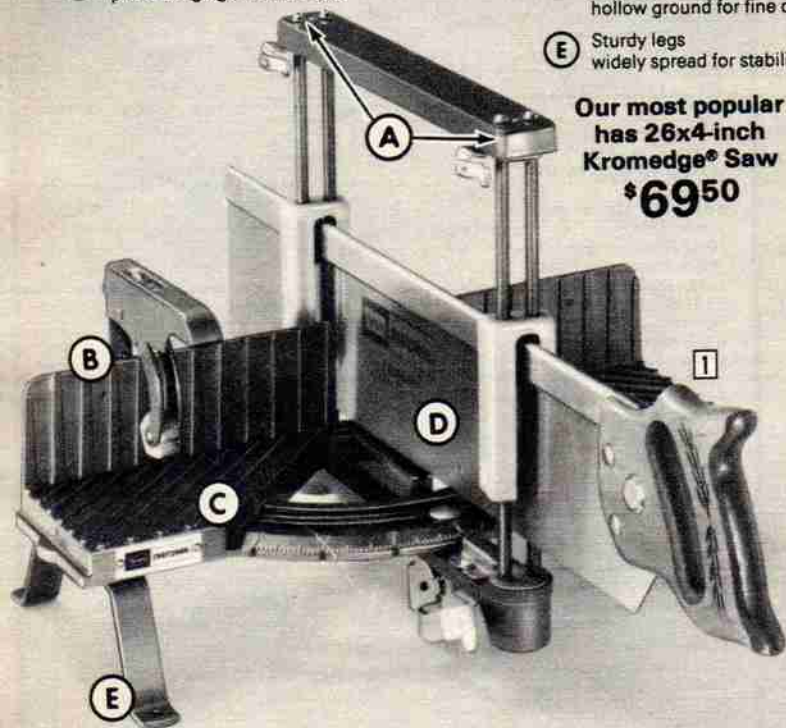

CRAFTSMAN® Miter Boxes with 16x3 1/2-inch saws and saw guides



(3) All-metal... with workpiece clamp

CUTTING RANGE: 3 1/2 in. deep, 3 3/4 in. wide; any angle 45° left, right.

SAW: 16x3 1/2-in. Kromedge® alloy steel blade. Hollow-ground teeth, 11 points per in. Hardwood handle.

SAW GUIDE: Adjusts to any saw thickness.

BASE: Cast-aluminum alloy back and base. Replaceable cutting board. Widely spaced legs for stability... with mounting holes. Overall: 19x9 1/4x11 in. high. Adjustable-length gauge to clamp wood to back.

ORDERING INFORMATION:
9 GT 36322—Wt. 10 lbs. ... \$39.50

(4) With hardwood base, metal back

CUTTING RANGE: 3 1/2 in. deep, 4 3/4 in. wide, any angle 45° left or right.


SAW: 16x3 1/2-in. Kromedge® alloy steel blade. Hollow-ground teeth, 11 points per in. Hardwood handle.

SAW GUIDE: Takes any saw thickness.

BASE: Cast-aluminum alloy back, hardwood base. Overall: 17 3/4x7x8 1/4 in. high.

ORDER INFO: Wt. 7 lbs. 2 oz.
9 GT 36329 \$29.99

Miter Box (4) without saw.
Shpg. wt. 5 lbs. 5 oz.
9 GT 3632 \$22.50

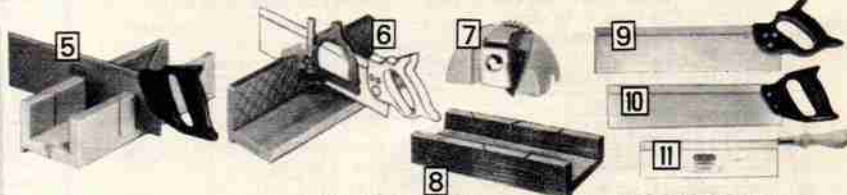

(5) Polystyrene Miter Box with 14x3-in. saw.

CUTTING RANGE: 3 in. deep, 2 1/2 in. wide. For cuts 90°, 45° left or right, 45° diagonal.

SAW: 14x3-in. steel blade, 11 points per in. Plastic handle.

BASE: High-impact molded polystyrene resists warping. Overall: 14x5x3 3/8 in. high.

ORDERING INFO:
Shipping weight 2 lbs. 5 oz.
9 GT 36328 \$6.97

(6) CRAFTSMAN Miter Box with hardwood base, saw guide.

CUTTING RANGE: 3 in. deep, 4 3/4 in. wide, any angle 45° left or right.

SAW GUIDE: Adjusts to any saw thickness.

BASE: Cast aluminum alloy back, hardwood base. Overall: 17 3/4x8x7 1/2 in. high.

ORDERING INFO: Saw not included. Wt. 5 lbs. 5 oz.
9 GT 3634 \$14.95

(7) X-Acto® Mat Cutter.

Cuts mats at 45° bevels, 90° angles. Also cuts balsa wood and plastic. Use for scoring and stripping... pull or push cuts. Adjustable depth of cut. Plastic body with positive blade lock holds blade securely. Includes 19 blades.

ORDERING INFORMATION:
Shpg. wt. 1 lb.
9 GT 52641 \$8.89

(8) Hardwood Miter Box.

CUTTING RANGE: 1 3/4 in. deep, 3 3/4 in. wide. For cuts 90°, 45° left or right.

BASE: Hardwood. Overall: 15 3/4x5 1/4x2 3/4 inches high.

ORDERING INFO: Not Craftsman. Wt. 2 lbs. 12 oz.
9 GT 3643 \$1.89

(9) CRAFTSMAN Back or Miter Saw.

BLADE: 16x3 1/2-inch Kromedge® alloy steel, hollow-ground teeth, 11 points per inch. Braced back.

HANDLE: Hardwood.

ORDERING INFO: Shpg. wt. 1 lb. 13 oz.
9 GT 36183 \$9.95

(10) Back Saw.

BLADE: 14x3-1/2 in. steel. 11 points per in. Braced back.

HANDLE: Plastic.

ORDERING INFO: Not Craftsman. Wt. 1 lb. 3 oz.
9 GT 36182 \$2.99

(11) CRAFTSMAN Hobby Saw.

BLADE: 10 in. long. Kromedge® alloy steel, 12 points per in. Braced back.

HANDLE: Hardwood.

ORDER INFO: Wt. 12 oz.
9 GT 36181 \$3.97

The Workbench that's a Vise and Sawhorse, too



Adjustable vise jaw even holds wedge shapes



Crosshatched grooves on vise jaws even grip pipe



Clamping blocks hold odd-shaped workpieces on top

With solid oak legs and vise jaw **\$74⁵⁰**

Our exclusive design. This versatile workbench holds even large, awkward workpieces on top or in vise jaws at a convenient height for hammering, sawing, drilling. Overall: 36 in. long, 18 in. wide, 32 in. high. And it's portable . . . weighs 40 lbs., so you can carry it right to the job site. Folds to 9x36x32 in. high . . . stands upright when folded.

TOP CONSTRUCTION: 3/4 in. thick. Insert swiveling clamping blocks in holes on top to grip irregular objects up to 22 in. wide . . . store blocks on side.


Back portion: Particle board, 10x36 inches long.

Vise jaw portion: Solid oak . . . 8x36 in. long. Holds objects up to 8 in. wide. Two cranks adjust independently to hold wedge shaped objects steady. Horizontal and vertical grooves on jaw faces to grip pipe and other tubular objects firmly.


LEGS: Solid oak, braced for stability, even with rugged use.

ORDERING INFO: See "N" suffix note, page 92.

9 GT 28875N—Wt. 40 lbs. \$74.50

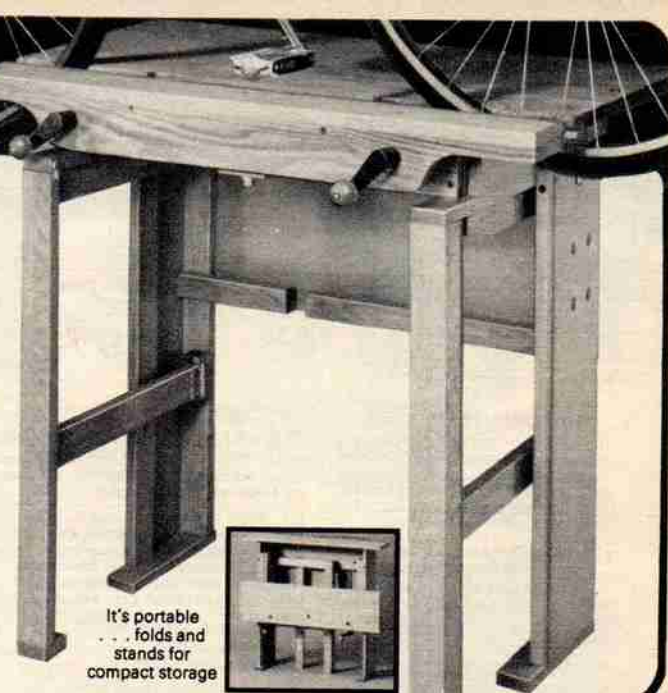

It's portable . . . folds and stands for compact storage

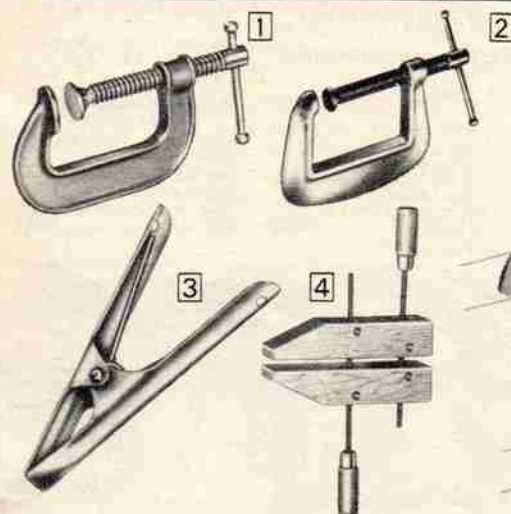

(1) **CRAFTSMAN Standard Malleable-iron "C" Clamp.** Plated steel screw; sliding handle. For gluing, sawing, welding.

CAPACITIES, ORDERING INFORMATION:


Catalog No.	Opens to	Throat depth	Shpg. wt.	Each
9 GT 66671	1 in.	1 in.	4 oz.	.97c
9 GT 66672	2 in.	1 1/4 in.	7 oz.	1.37
9 GT 66673	3 in.	1 3/4 in.	15 oz.	2.37
9 GT 66674	4 in.	2 in.	2 lbs. 2 oz.	3.97
9 GT 66675	5 in.	2 1/2 in.	2 lbs. 8 oz.	4.97
9 GT 66676	6 in.	2 3/4 in.	2 lbs. 15 oz.	5.97
9 GT 66678	8 in.	3 1/4 in.	4 lbs. 6 oz.	7.97

CRAFTSMAN Deep-throat "C" Clamps. Not shown. For large gluing jobs. Pearlite iron frame, stronger than (1) above.

CAPACITIES, ORDERING INFORMATION:

Catalog No.	Opens to	Throat depth	Shpg. wt.	Each
9 GT 66681	1 in.	3 in.	8 oz.	1.87
9 GT 66682	2 1/2 in.	4 1/2 in.	1 lb. 7 oz.	3.87
9 GT 66684	4 in.	5 in.	2 lbs. 12 oz.	6.57

Gluing Clamps

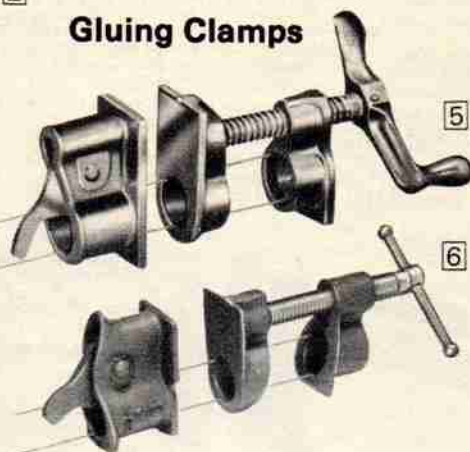

(2) **CRAFTSMAN Aluminum Alloy "C" Clamp.** Steel screw, sliding handle.

CAPACITIES, ORDERING INFORMATION:

Catalog Number	Opens to	Throat depth	Shpg. wt.	Each
9 GT 66701	1 in.	1 in.	3 oz.	81.17
9 GT 66702	2 in.	1 1/4 in.	5 oz.	1.47
9 GT 66703	3 in.	1 3/4 in.	10 oz.	2.47
9 GT 66704	4 in.	2 in.	1 lb.	3.87

(3) **CRAFTSMAN Spring Clamps.** Steel spring tension.

Catalog No.	Opens to	Length	Shpg. wt.	Each
9 GT 66891	1 inch	4 inches	4 oz.	.97c
9 GT 66892	2 inches	6 inches	9 oz.	1.47
9 GT 66893	3 inches	9 inches	15 oz.	2.47

(4) **CRAFTSMAN Adjustable Gluing Clamp.** Hardwood jaws.

Catalog No.	Opens to	Shpg. wt.	Each
9 GT 66638	8 inches	3 lbs. 15 oz.	88.47
9 GT 66639	10 inches	5 lbs. 2 oz.	9.47

(5 and 6) **Gluing Clamps.** Use with threaded pipe for clamping extra-long workpieces (pipe not included). Two-piece sets.

(5) **CRAFTSMAN Fits 3/4-in. pipe.** Jaw face 1 1/4 x 1 1/2 in. Spin-quick handle.

ORDERING INFORMATION: Wt. each set 3 lbs. 3 oz.

9 GT 6674 Set \$6.47

Two sets for 12.47

(6) **Fits 1/2-in. pipe.** Jaw face 1 1/4 x 1 1/2 in. T-handle. Japan. Not Craftsman.

ORDERING INFORMATION: Wt. each set 15 oz.

9 GT 6675 Set \$5.47

Two sets for 10.47



CRAFTSMAN Corner and Miter-box Clamp Set

\$11.97

(7) **CRAFTSMAN Corner and Miter-box Clamp Set.** Simplifies cutting, gluing, nailing. Holds piece up to 3 in. wide. Holes for fastening to table. Set includes 3 corner clamps, 1 miter-box clamp. Aluminum alloy.

ORDER INFO: Wt. 2 lbs. 13 oz.

9 GT 66614 Set \$11.97

Miter-box Clamp alone. Guides saw for precise 45° angle cutting. Fits any back or hand saw.

ORDERING INFORMATION: Shipping weight 1 pound 2 ounces.

9 GT 6661 \$3.97

Corner Clamp alone. Three needed with miter-box clamp above.

ORDERING INFORMATION: 9 GT 6666—Shpg. wt. 12 oz. . \$2.97

(8) **All-purpose White Glue.** Dries clear. For wood, plastic, paper, porous material.

Catalog Number	Size	Shipping weight	Each	Any 4 or more, each
9 GT 80614	16 oz.	1 lb. 7 oz.	1.89	1.52
9 GT 80615	32 oz.	2 lbs. 10 oz.	2.89	2.60

(9) **Contact Cement.** Non-toxic. No clamping. For porous, non-porous goods.

Catalog Number	Size	Shipping weight	Each	Any 4 or more, each
9 GT 80655	4 oz.	9 oz.	2.57	2.31
9 GT 80656	16 oz.	1 lb. 8 oz.	1.77	1.80
9 GT 80657	32 oz.	2 lbs. 13 oz.	4.27	3.84

(10) **Hide Glue.** For cabinet making, wood, fabric, leather, cardboard, porous goods.

Catalog Number	Size	Shipping weight	Each	Any 4 or more, each
9 GT 80622	4 oz.	9 oz.	1.08	.98c
9 GT 80623	8 oz.	14 oz.	1.97	1.77

(11) **CRAFTSMAN Heavy-duty Glue Gun.** Trigger control. Preset thermostat, patented aluminum melting chamber. Heat-resistant plastic handle. 8x2 1/4 x 7 in. high. 6-ft. cord. 110-120-v., 60-Hz. AC. 160-w. UL listed.

GLUE: Three 4-in. sticks for porous, non-porous material. Odorless, non-toxic. Bonds in 60 seconds.

ORDER INFO: Wt. 1 lb. 13 oz.

9 GT 80524 \$10.97

Extra Glue Sticks for (11). Pkg. of 6. Wt. 5 oz.

9 GT 80525 Pkg. \$1.47

Box of 27. Wt. 15 oz.

9 GT 80526 Box 3.97

(12) **CRAFTSMAN Medium-duty Glue Gun.**

Pressure on nozzle controls flow. Heat-resistant plastic handle. Overall: 4 1/2 x 2 1/4 x 5 in. high. 6-ft. cord. 110-120-v., 60-Hz. AC. 65-w. UL listed.

GLUE: Four 2 1/2-in. sticks for porous, non-porous material. Three sealer sticks for waterproof caulking. 90% bonding strength in 60 seconds.

ORDERING INFORMATION: Shipping weight 1 lb. 4 oz.

9 GT 80514 \$7.37

Extra Glue Sticks for (12). Box of 60.

Shipping weight 14 oz.

9 GT 80517 Box \$3.29




Heavy-duty Glue Gun

\$10.97

Medium-duty Glue Gun

\$7.37

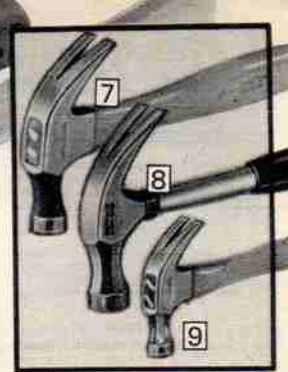

Ball-pein Hammers

HEAD: Drop-forged heat-treated steel head for strength. Machined face and pein. Face crowned and beveled to help prevent chipping. Head epoxy-bonded to handle, held tight with steel wedge.

(1) **CRAFTSMAN Ball-pein Hammer with fiber glass handle**
HANDLE: Fiber glass . . . stronger than wood handles. Neoprene grip with chevron pattern.
SIZE AND ORDERING INFORMATION:

Catalog No.	Head	Shipping wt.	Price
9GT38472	8 oz. 1 lb. 7 oz.	7 oz.	\$6.97
9GT38473	12 oz. 1 lb. 7 oz.	7 oz.	7.47
9GT38474	16 oz. 1 lb. 10 oz.	7 oz.	7.97
9GT38475	24 oz. 2 lbs. 6 oz.	8 oz.	8.47
9GT38476	32 oz. 2 lbs. 2 oz.	8 oz.	8.97

(2) **CRAFTSMAN Ball-pein Hammer with hickory handle**
HANDLE: Select hickory.
SIZE AND ORDERING INFORMATION:

Catalog No.	Head	Shipping wt.	Price
9GT38461	4 oz. 10 oz.	10 oz.	\$4.39
9GT38463	8 oz. 15 oz.	15 oz.	4.89
9GT38464	12 oz. 1 lb. 4 oz.	4 oz.	4.89

CRAFTSMAN® Nail Hammers with our finest head . . 4 handle types

(3 thru 6) See page 2 for the complete story of what makes these hammers so outstanding.

HEAD: Triple-tempered drop-forged steel head for strength and durability. Machined face. Beveled crown to reduce chipping. Steel ribs under each claw for extra strength. Third claw to pull nails from tight spots on 13-oz. and 16-oz. heads.

(3) **With fiber glass handle.** More shock-absorbent than steel. Locked in place with 3,000 pounds of hydraulic pressure. Parallel fiber glass stands for strength. Hollow core for balance. Neoprene grip resists oil and grease . . . with chevron perforations for firm grasp.
CLAW, SIZE AND ORDERING INFORMATION:

With curved claw, 16-oz. head.
Shipping wt. 1 lb. 13 oz.
9 GT 3820 \$9.47

With curved claw, 13-oz. head.
Shipping wt. 1 lb. 9 oz.
9 GT 3822 9.47

With straight claw, 16-oz. head.
Shipping wt. 1 lb. 15 oz.
9 GT 3821 \$9.47

With straight claw, 20-oz. head plus milled face. Resists slipping on impact so nail goes in straight. No third claw.
Shipping wt. 2 lbs. 6 oz.
9 GT 3823 \$11.47

(4) **With tubular steel handle.** Stronger than hickory, more shock-absorbent than solid steel. Hickory plug absorbs vibrations. Perforated neoprene grip resists oil, grease for firm, slip-resistant grasp.
CLAW: Curved.
SIZE: 16-ounce head.
ORDERING INFORMATION:

Shipping weight 1 pound 13 oz.
9 GT 3836 \$9.47

(5) **With solid steel handle.** Drop-forged, tempered for strength. Hickory plug helps cut vibrations. Perforated neoprene grip resists oil, grease . . . helps resist slipping. Grip bonded to I-beam shaped handle.
CLAW, SIZE, ORDERING INFO:

With curved claw, 16-oz. head.
Shipping weight 1 lb. 12 oz.
9 GT 3825 \$9.47

With straight claw, 20-oz. head. No third claw. Wt. 2 lbs. 6 oz.
9 GT 38273 \$10.95

(6) **With select hickory handle**
Most shock-absorbent handle we sell. Reinforced at neck with steel shield (except 9 GT 38095) to protect handle on overstrikes.
CLAW, SIZE, ORDERING INFORMATION:

With curved claw, 16-oz. head.
Shpg. wt. 1 lb. 11 oz.
9 GT 38141 \$7.95

With straight claw, 16-oz. head.
Shpg. wt. 1 lb. 12 oz.
9 GT 3816 \$7.95

With straight claw, 20-oz. head. Like hammers described above, except no shield, third claw or ribs under claw.
Shpg. wt. 2 lbs. 3 oz.
9 GT 38095 \$8.47

Nail Hammers

(7) **With hickory handle**
HEAD: Drop-forged steel with curved claws. 16-oz.
HANDLE: Double steel-wedged hickory.
ORDERING INFORMATION:
Shpg. wt. 1 lb. 9 oz.


CRAFTSMAN: With beveled claws.
9 GT 3818 \$5.95
Not Craftsman.
9 GT 38081 2.99

(8) **With steel handle**
HEAD: 16-oz. drop-forged steel. Curved claws.
HANDLE: Tubular steel with neoprene grip.

ORDERING INFO: Made in Japan. Wt. 1 lb. 14 oz.
9 GT 3812 \$3.99

(9) **CRAFTSMAN Model Maker's Hammer**
HEAD: 5-oz. forged steel. Curved claws.
HANDLE: Hickory.

ORDERING INFO: Shpg. wt. 10 oz.
9 GT 3813 \$5.47

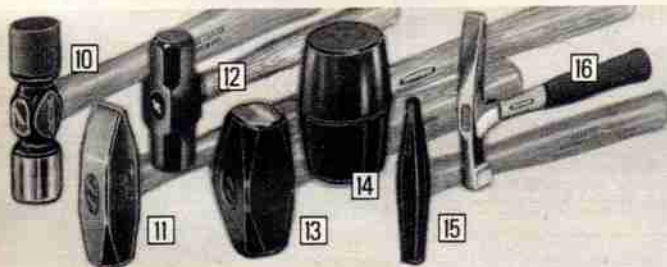

Hammers, Sledges and Mallet

(10) **CRAFTSMAN Plastic-tip Hammer**

HEAD: Forged steel core with 1 plastic tip, 1 vinyl tip to avoid marring surfaces.
HANDLE: Hickory.

SIZE AND ORDERING INFORMATION:

Catalog No.	Head	Shipping wt.	Each
9 GT 38291	6 oz.	11 oz.	\$4.95
9 GT 38292	12 oz.	1 lb. 5 oz.	5.95

(11) **CRAFTSMAN Heavy-duty Hammer**

HEAD: Drop-forged, tempered steel.
HANDLE: Select hickory.
SIZE, ORDERING INFORMATION:

Catalog No.	Head	Shipping wt.	Each
9 GT 38262	2 1/2 lbs.	3 lbs. 4 oz.	\$7.95
9 GT 38263	3 lbs.	3 lbs. 14 oz.	8.47

(12) **CRAFTSMAN Sledges**

HEAD: Double-faced . . . steel.
HANDLE: Select hickory.
SIZE, ORDERING INFORMATION:

With 4-lb. head, 15-in. long handle. Drop-forged head.
Shpg. wt. 4 lbs. 10 oz.
9 GT 50751 \$9.95

With 8-lb. head, 32-in. long handle. Drop-forged head.
Shpg. wt. 10 pounds.
9 GT 50752C \$14.95

With 10-lb. head, 34-in. long handle. Hand-forged head.
Shpg. wt. 12 lbs.
9 GT 50753C \$16.95

(13) **CRAFTSMAN Hand-drilling Hammer**

HEAD: 3-lb. drop-forged steel.
HANDLE: Hickory . . . 10 in. long.
ORDERING INFORMATION:

Shipping weight 3 lbs. 11 oz.
9 GT 38311 \$8.47

(14) **CRAFTSMAN Rubber Mallet**

HEAD: Non-marring rubber. Weighs 16 ounces.
HANDLE: Hickory.
ORDERING INFORMATION:

9 GT 4578—Wt. 1 lb. 8 oz. . . . \$4.47

(15) **Tack Hammer.**

HEAD: 5-oz. forged steel. One magnetized face holds tacks.
HANDLE: Straight-grained hickory.
ORDERING INFORMATION:


9 GT 3802—Wt. 10 oz. \$2.99

(16) **CRAFTSMAN Bricklayer's Hammer**

HEAD: 16-oz. forged steel.
HANDLE: Steel with neoprene grip . . . non-slipping, resists oil and grease.
ORDERING INFORMATION:

Shpg. wt. 1 lb. 14 oz.
9 GT 6544 \$9.47

SAFETY NOTE: Wear safety goggles when using striking tools . . . see page 35.

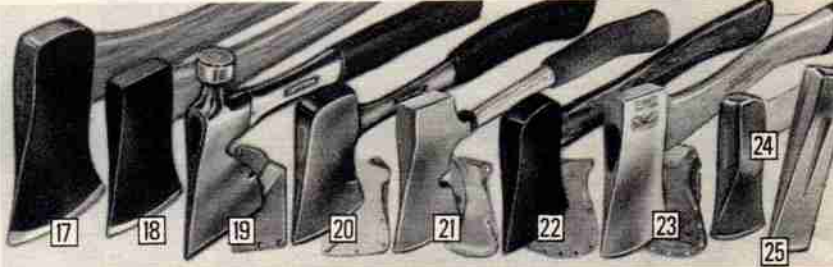

Axes, Hatchets, Maul, Wedge with precision-ground edges

(17) **Our finest CRAFTSMAN Axes**

HEAD: Tempered, hardened tool steel, wedge-locked firmly to handle. 3 1/2-lbs. With 4 1/2-in. cutting edge.

HANDLE: Hickory, 36 in. long. Tested to over 650 lbs. striking force.

BIT, ORDERING INFO: Shipping weight 6 lbs.

Single bit
9 GT 50371C \$10.95
Double bit (not shown)
9 GT 50411C \$12.95

(18) **CRAFTSMAN Axe**

HEAD: Hardened, tempered steel. 2 1/4-lb. With 3 1/2-in. cutting edge.

HANDLE: Measures 28-inches long. Hickory.

ORDERING INFORMATION: Shipping weight 4 lbs.
9 GT 5028C \$9.95

(19) **Our finest CRAFTSMAN Half Hatchet**

HEAD: Forged axe-steel, heat-treated, polished and tempered to hold a keen edge. Preshrunk hickory plug absorbs shock. Slot for pulling nails. 3 1/4-in. cutting edge. Includes protective leather blade sheath.

HANDLE: Chrome-plated 13-in. tubular steel. Slip-resistant neoprene grip.
ORDERING INFORMATION: Shpg. wt. 1 lb. 14 oz.
9 GT 4812 \$12.47

Half Hatchet (not shown). Not Craftsman.

HEAD: Heat-treated, hardened forged steel. 3 1/2-in. cutting edge. Double-steel wedge holds head firmly on handle. Slot for pulling nails. Black enamel finish. Protective leather sheath.

HANDLE: Measures 13-inches long. Hickory.

ORDERING INFORMATION: Shpg. wt. 2 lbs.
9 GT 4800 \$6.97

(20) **CRAFTSMAN Camper's Axe**

HEAD: Polished solid steel head and neck. 2 1/4-in. cutting edge. Slot for pulling nails. Protective leather sheath open at top for driving nails, tent stakes.

HANDLE: Solid steel with slip-resistant neoprene grip. 13 inches long.

ORDERING INFORMATION: Shpg. wt. 2 lbs.
9 GT 4810 \$11.47

(21) **Camper's Axe**

Not Craftsman. From Japan. HEAD: High-carbon steel head drop-forged and polished. With 2 1/4-in. cutting edge. With slot for pulling nails. Vinyl belt sheath.

HANDLE: 13-inch long tubular steel with neoprene grip.
ORDERING INFORMATION: Shpg. wt. 1 lb. 14 oz.
9 GT 4815 \$5.99

(22) **Pack Axe**

Not Craftsman. HEAD: Forged, heat-treated steel with lacquer finish to resist rust. 1 1/4-lb. with 3 1/4-in. cutting edge. With open-top leather sheath.

HANDLE: Measures 14-inches long. Hickory.

ORDERING INFORMATION: Shpg. wt. 2 lbs.
9 GT 4811 \$7.97

(23) **CRAFTSMAN Pack Axe**

Bicentennial design and eagle on head. Sheath has bicentennial imprint.

HEAD: 1 1/4-lb. forged steel, heat-treated and polished. Antique brass finish. 3 1/4-in. cutting edge.

HANDLE: 14-in. hickory.
ORDERING INFORMATION: Shpg. wt. 2 lbs. 3 oz.
9 GT 4813 \$12.47

(24) **Woodchopper's Maul**


For splitting wood. HEAD: High-carbon steel with polished edge. 6-lb. head, 3 1/4-in. cutting edge.

HANDLE: 36-in. hickory.
ORDERING INFORMATION: Shpg. wt. 8 lbs.
9 GT 50741C \$14.95

(25) **Splitting Wedge**

Use for splitting wood. HEAD: Hand-forged carbon steel. 5 lbs. 9 in. long.
ORDERING INFORMATION: Shpg. wt. 5 lbs. 2 oz.
9 GT 5074 \$5.99

FULL UNLIMITED WARRANTY FOR CRAFTSMAN HAND TOOLS: If these Craftsman Hand Tools fail to give complete satisfaction, return them to any Sears store throughout the United States for a free replacement.

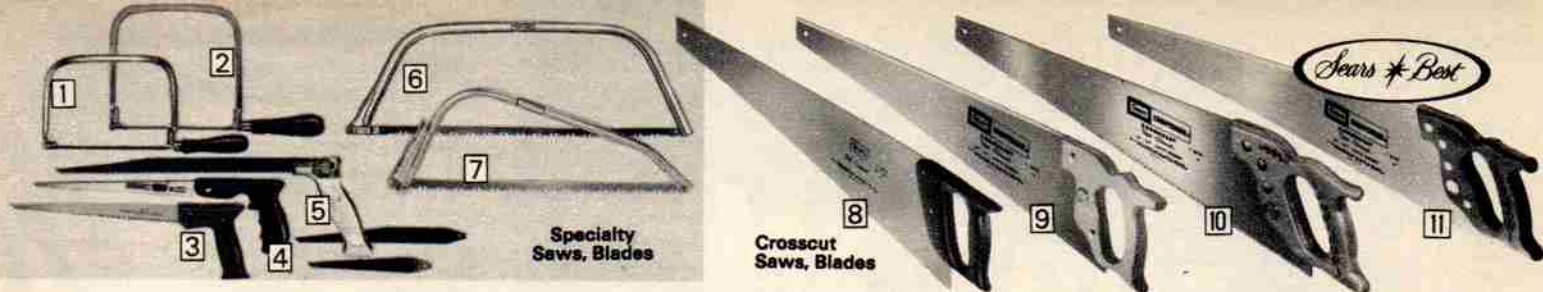

Sears * Best

(1) Coping Saw
Cadmium-plated steel head with 5-inch throat depth. Includes 6½-inch blade with 15 teeth per inch. Takes blade 9 GT 3543 sold right. Hardwood handle.

ORDERING INFO:
Shpg. wt. 8 oz.
9 GT 35363 ...\$1.29

(2) CRAFTSMAN Coping Saw
6¼-in. throat depth. Includes steel 6½-inch pin-end blade with 15 teeth per inch. Uses pin or lock loop-end blades. Hardwood handle.

ORDERING INFO:
Shpg. wt. 12 oz.
9 GT 3541 ...\$2.49

Pin-end Coping Saw
Blades. Steel. 6½ in. long. CUT. ORDERING INFO:
Pkg. of 3. Wt. 2 oz.
With 15 teeth per in.
9 GT 3544Pkg. 69c
With one each 10, 15, 20 teeth per inch.
9 GT 3543Pkg. 69c

(3) Keyhole Saw. Tempered steel blade 10 in. long, 10 teeth per in. Plastic handle.
ORDER INFO: Wt. 6 oz.
9 GT 35195\$1.79

(4) CRAFTSMAN Keyhole Saw. Kromedge® steel blade 10 in. long, 10 teeth per in. Plastic handle with patented slot lock.
ORDER INFO:
Shpg. wt. 8 oz.
9 GT 35191\$2.99

(5) CRAFTSMAN Nest of Saws
With 3 tempered steel blades: 12-in. wood-cutting, 7 teeth per in.; 6-in. multi-purpose, 10 teeth per in.; 8½-in. metal-cutting, 24 teeth per in. Die-cast alum. handle, adjustable lock.
ORDERING INFO: Wt. 14 oz.
9 GT 3513Set \$4.95

(6) CRAFTSMAN Bow Saw
Steel blade 30 in. long. Tubular steel frame.
ORDERING INFO: Wt. 3 lbs.
9 GT 49232C\$5.99
Extra Blade for (6). Norway.
9 GT 48931—Wt. 6 oz.\$2.44

(7) CRAFTSMAN Pruning Saw
Steel blade 21 in. long. Tubular steel frame with tension lever. From Norway.
ORDER INFORMATION:
Shpg. wt. 1 lb. 7 oz.
9 GT 4904\$5.49
Extra Blade for (7). Norway.
9 GT 4905—Wt. 4 oz.\$2.44

(8) Straight-back Saw. Precision ground, heat treated, tempered and hardened tool steel blade, 26 in. long. 8 points per inch for coarse cuts. Plastic handle.
ORDERING INFORMATION:
Shpg. wt. 2 lbs.
9 GT 36123C\$2.99

CRAFTSMAN Flat-ground Straight-filed Saw (not shown). Tempered carbon-steel blade 26 in. long. For coarse cuts, 8 points per inch. With vinyl blade guard. Molded polymer handle.
ORDERING INFORMATION:
Shpg. wt. 2 lbs.
9 GT 36136C\$4.95

(9) CRAFTSMAN Flat-ground Bevel-filed Saw. Hardened, tempered carbon-steel blade. Vinyl blade guard. Hardwood handle. CUT. ORDERING INFORMATION:
Shpg. wt. 2 lbs.
8 points per inch, 26 in. long.
9 GT 36144C\$8.95
10 points per inch, 26 in. long.
9 GT 36145C\$8.95
12 points per inch, 22 in. long.
9 GT 36141C\$7.95

(10) CRAFTSMAN Taper-ground Bevel-filed Saw. Chrome-nickel alloy steel blade with Kromedge® finish, vinyl guard. Hardwood handle. CUT. ORDER INFO: Wt. 2 lbs.
8 points per inch.
9 GT 36153C\$11.95
10 points per inch.
9 GT 36154C11.95

(11) CRAFTSMAN Taper-ground Bevel-filed Saw. Sears * Best. Chrome-nickel-moly alloy steel blade with Kromedge® finish for rust-resistance, helps retain keen cutting edge. Taper-ground blades reduce friction, binding. Bevel-filed teeth for fast, clean cuts. Vinyl blade guard. Hardwood handle, walnut-stained and lacquer-finished.
ORDERING INFORMATION:
For coarse cuts, 8 points per inch.
Shipping wt. 2 lbs.
9 GT 36193C\$13.95
For fine cuts, 10 points per inch.
Shipping wt. 2 lbs.
9 GT 36194C\$13.95



(12) Tack Puller. Steel with vinyl grip.
ORDERING INFORMATION:
9 GT 3810—Shipping weight 4 ounces79c

(13) CRAFTSMAN 12-in. Nail Puller. Steel jaws.
ORDERING INFORMATION:
9 GT 6595—Shipping weight 1 lb. 7 oz.\$3.67

(14) 18-inch Nail Puller. Steel jaws.
ORDERING INFORMATION:
9 GT 6593—Shipping weight 5 lbs. 6 oz.\$8.95

(15) CRAFTSMAN Pull-n-Pry® Bars. Made of tempered steel.
SIZES. ORDERING INFORMATION:
9 GT 6591—2x15 in. long. Wt. 1 lb. 12 oz.\$4.47
9 GT 6594—2x31½ in. long. Wt. 5 oz.99c

(16) CRAFTSMAN Rip Bar. Steel. ¾x18 in. long.
ORDERING INFORMATION:
9 GT 6577—Shipping weight 2 lbs. 11 oz.\$4.77

(17) CRAFTSMAN Wrecking Bars. Steel.
SIZES. ORDERING INFORMATION:
9 GT 6597C—2x24 in. long. Wt. 4 lbs.\$4.95
9 GT 65981C—2x30 in. long. Wt. 5 lbs.5.67

Economy Wrecking Bars (not shown). Steel.
SIZES. ORDERING INFORMATION:
9 GT 6596—1½x12 inches long. Wt. 15 oz.79c
9 GT 6598C—1½x24 inches long. Wt. 4 lbs.\$2.67



(18) CRAFTSMAN Heavy-duty folding Sawhorse Set. Folds to 2½x2½x36 in., erects to 30 in. high. Steel. Braces between legs and ridge beam. Holes in beam for adding board (not incl.) to lengthen. Pkg. of 2. Wt. 25 lbs.
9 GT 28899CPkg. \$29.99

(19) Sawhorse Legs. Folding steel sections 30 in. long. Enamel finish. Package of 2.
Shipping weight 17 pounds.
9 GT 28887CPkg. \$14.99


(20 and 21) Sawhorse Brackets. Hinged steel. Enamel finish. Fits new 2x4's (1½x3½ in., not incl.).

(20) Heavy-duty Brackets. No nailing necessary. 6½x3¾x7 in. long. Package of 2. Wt. 2 lbs. 5 oz.
9 GT 28871Pkg. \$4.99

(21) Medium-duty Brackets. With flanged nail holes. 6½x3¾x4 inches long. Package of 2. Wt. 2 lbs. 5 oz.
9 GT 28872Pkg. \$2.49
Light-duty Brackets. Similar to (21) above. With flanged nail holes. Package of 2. 4x3½x4 inches long. Wt. 1 lb. 13 oz.
9 GT 28873Pkg. \$1.69

(22) CRAFTSMAN 8-pc. Carving Chisel Set. Austempered, forged alloy steel blades. Precision-ground bevels, cutting edge. Hardwood handles. 6 chisels: straight blade, bent blade, bent gouge, skew bevel, "U" tool, veining tool. Plastic pouch. Japan.
ORDERING INFO:
Shpg. wt. 12 oz.
9GT3685Set \$10.95

(23) 3-pc. Chisel Set. Drop-forged, heat-treated high-carbon steel blades. Vinyl-covered plastic handles. Sizes: ½, ¾, 1-inch wide. With plastic pouch. From Japan.
ORDERING INFORMATION:
Wt. set 1 lb.
9 GT 36891\$5.47

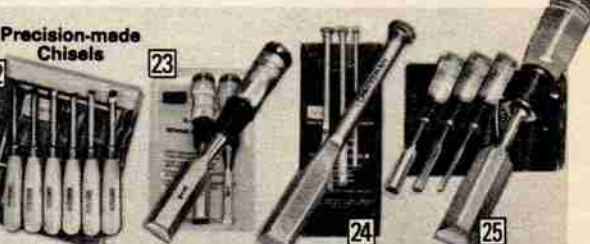

(24) CRAFTSMAN 4-pc. Chisel Set. Drop-forged high-carbon steel, hardened, tempered, chrome-plated. With striking head. Sizes: ¼, ½, ¾, 1-inch wide. Plastic pouch.
ORDERING INFO: Wt. 1 lb. 13 oz.
9 GT 36838—Separate prices total \$11.58Set 10.87
Individual Chisels as (24).

Catalog Number	Width	Shpg. wt.	Each
9 GT 36832	¼ in.	4 oz.	\$2.57
9 GT 36833	½ in.	6 oz.	2.77
9 GT 36834	¾ in.	7 oz.	2.97
9 GT 36835	1 in.	12 oz.	3.27
9 GT 36836	1½ in.	15 oz.	3.77
9 GT 36837	2½ in.*	2 lbs. 5 oz.	4.87

* 2½-inch size is double-beveled.

(25) CRAFTSMAN 4-pc. Chisel Set. Precision-ground high-carbon steel blades, hammer-forged, heat-treated. Butyrate Tenite® II handles. Sizes: ¼, ½, ¾, 1-inch wide. Plastic pouch.
ORDERING INFO: Wt. 1 lb. 9 oz.
9 GT 36807—Separate prices total \$13.78Set \$12.97
Individual Chisels as (25).

Catalog Number	Width	Shpg. wt.	Each
9 GT 36802	¼ in.	6 oz.	\$3.27
9 GT 36803	½ in.	7 oz.	3.37
9 GT 36804	¾ in.	7 oz.	3.47
9 GT 36805	1 in.	8 oz.	3.67
9 GT 36806	1½ in.	9 oz.	3.97



(26) Letter Stamping Sets. Steel. Marks permanently on leather, plastic, wood, metal. A to Z, period. Wooden box.
SIZES. ORDERING INFORMATION:
1½-in.
9 GT 37924—Wt. 1 lb. 12 oz.Set \$12.99
3½-in.
9 GT 37925—Wt. 2 lbs. 11 oz.Set 14.99

(27) Number Stamping Sets. Like (26) but numbers 0 to 8. No. 6 inverts to 9. No period. With wooden box.
SIZES. ORDERING INFORMATION:
9 GT 37912—1½-in. Wt. 15 oz.Set \$4.99
9 GT 37913—3½-in. Wt. 1 lb. 5 oz.Set 5.99



(28) CRAFTSMAN Nail-setting Tool Set. 4-piece set of heat-treated, tempered high-carbon tool steel. Square head, knurled body. Sizes: ½, ¾, 1, 1½-in. Plastic pouch.
ORDERING INFORMATION:
4-piece Set. Wt. 9 oz.
9 GT 37547Set \$3.49
Individual Setting Tools. Shipping weight 3 ounces.
9 GT 37552—½-in.89c
9 GT 37553—¾-in.89c
9 GT 37554—1-in.89c
9 GT 37555—1½-in.89c


(29) CRAFTSMAN Oval Scythe Stone. Hones knives. Vitrified aluminum oxide. Oval shaped surface ½x1½x11 in. long.
ORDERING INFORMATION:
9 GT 6445—Wt. 10 oz.\$1.29
SIZES. ORDERING INFORMATION:
2x¾x5 inches long.
9 GT 64403—Wt. 10 oz.\$1.99
2x1x7 inches long.
9 GT 64402—Wt. 1 lb. 2 oz.2.19

(31) Steel Stud Driver. Fasten furring strips, drapery brackets, shelving, conduits to brick, concrete and cinder blocks. Set in concrete with 2-lb. or larger hammer. Lip helps guard against hitting hand. Vinyl-covered hardened steel.
ORDERING INFORMATION:
Shipping weight 1 lb. 4 oz.
9 GT 3571\$4.49

(32) Steel Drive Studs. For use with (31). Austempered steel with washer.

ORDERING INFORMATION:
Shpg. wt. 4 oz. per pkg.

Catalog Number	Shank Length	Pkg. of	Price Pkg.
9GT35702	1 in.	12	\$1.29
9GT35704	1½ in.	10	1.29
9GT35705	2 in.	9	1.29
9GT35708	2½ in.	8	1.29
9GT35709	3 in.	7	1.29

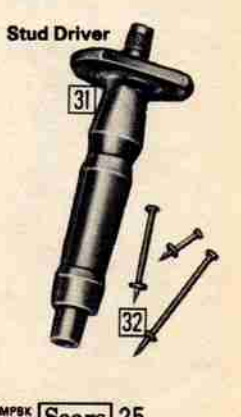

SCREWDRIVERS . . all backed by our full, unlimited warranty . . see page 24

Like all of our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these screwdrivers so outstanding:

- (A) Butyrate plastic handles resist electric shocks
- (B) Color-coded handles help identify slotted, Phillips or Reed Prince screwdrivers quickly
- (C) Job-sized handles . . bigger the blade, the bigger the handle
- (D) Handles have wide flutes, serrated thumb knurl for gripping
- (E) Square-shafted slotted screwdrivers let you grip the shaft for extra torque and power
- (F) "Super-Tuff" alloy steel shafts resist twisting, chipping

Screwdriver Sets . . choose 20-pc. or 4-pc. sets

CONSTRUCTION:

Handle . . Color-coded Butyrate plastic. Wide flutes and serrations on thumb knurl for added control.
Blade . . Chrome-plated molybdenum alloy steel. Slotted types have square shafts. Phillips type have round shafts.

(1) 20-piece Screwdriver Set.

SIZES, ORDERING INFO:
11 slotted: 1/8x2, 1/8x4, 3/16x4, 3/16x6, 1/4x4, 1/4x6, 1/4x12, 5/16x12, 3/8x8, 3/8x12, 1/2x12-in.
7 Phillips: numbers 0 (2 1/2 in.), 1 (3 in.), 2 (4 in.), 2 (8 in.), 2 (1 1/4 in.), 3 (6 in.), 4 (8 in.). One Reed Prince. One 3/4x4-in. screw-holding slotted type.
9 GT 41082—Wt. 5 lbs. Set \$34.77

4-piece Standard Set. Rated Sears Best.

SIZES, ORDERING INFO:
1/4x6, 3/16x4, 1/8x4, 1/8-in. pocket-size with clip.
9 GT 41501—Wt. 15 oz. Set \$5.97

4-piece Phillips Set. Rated Sears Best.

SIZES, ORDERING INFO: No. 0, 1, 2, and 3 sizes. Wt. 1 lb. 1 oz.
9 GT 4147Set \$5.97

Individual Screwdrivers . . Standard, Phillips or Reed Prince

(2) Standard Screwdrivers.

SIZES, ORDERING INFORMATION: Fits regular slotted screws.

Catalog Number	Blade inches	For screws	Shpg. wt.	Each
9 GT 41589	1/8x4	Ex. small	3 oz.	\$1.47
9 GT 41581	3/16x4	Small	5 oz.	1.77
9 GT 41582	1/8x9	Small	5 oz.	2.17
9 GT 41583	1/8x4	Medium	6 oz.	1.87
9 GT 41584	1/8x6	Medium	7 oz.	2.17
9 GT 41585	1/4x12	Medium	8 oz.	2.77
9 GT 41586	1/4x12	Medium	8 oz.	2.77
9 GT 41587	3/8x8	Large	9 oz.	2.97
9 GT 41588	3/8x12	Ex. large	14 oz.	3.97

Standard Stubby Screwdriver.

SIZES, ORDERING INFORMATION:
With 1/4x1 1/2-inch blade only. 3 1/2 inches long.
Shipping weight 4 ounces.
9 GT 4151Set \$1.47

(3) Phillips Screwdrivers.

SIZES, ORDERING INFO: Fit cross-slotted screws.

Catalog Number	Size	For screws	Blade in.	Wt. oz.	Each
9 GT 41293	0	Ex. small	2 1/2	3	\$1.47
9 GT 41294	1	Small	3	4	1.67
9 GT 41295	2	Medium	4	4	1.87
9 GT 41296	2	Medium	8	6	2.27
9 GT 41297	3	Large	6	7	2.47
9 GT 41298	4	Ex. large	8	10	3.27

Phillips Stubby Screwdriver.

SIZES, ORDERING INFO: 1 1/2-in. blade. No. 2 bit. 3 1/2 in. long.
9 GT 4118—Shpg. wt. 4 oz.Set \$1.77

(4) Reed Prince Screwdriver. For cross-recessed screws.

SIZES, ORDERING INFO: 1/4x4-in. blade.
9 GT 4114—Shpg. wt. 5 oz.Set \$1.97

(5) Pocket-clip Screwdriver.

SIZES, ORDERING INFORMATION:
With 1/8x2-inch blade. Standard bit. 4 inches long.
Shipping weight 3 ounces.
9 GT 41421Set \$1.17

(6) Screw-holding Drivers. Thumb control holds screw for 1-hand use.

SIZES, ORDERING INFORMATION:

Catalog Number	Blade size	Shpg. wt.	Each
9 GT 41122	1/8x2 1/2 in.	3 oz.	\$2.07
9 GT 41123	1/8x4 in.	4 oz.	2.17
9 GT 41124	3/16x5 in.	5 oz.	2.47
9 GT 41125	3/16x7 in.	6 oz.	2.67

(7) Wedge-type Screw-holding Drivers.

Split-tip adjusts fast . . wedges firmly in slot. Fits sunken screws—needs clearance of screw head.
SIZES, ORDERING INFORMATION:
9 GT 41201—1/8x3 in. Wt. 3 oz.Set \$1.99
9 GT 41202—1/8x4 in. Wt. 4 oz.Set 2.37
9 GT 41203—1/8x4 in. Shpg. wt. 5 oz.Set 2.57
9 GT 41204—1/8x6 in. Shpg. wt. 6 oz.Set 2.77

4-piece Screw-holding Driver Set. Includes one screwdriver in each of the four sizes listed under (7) above.

ORDERING INFORMATION:
Shipping weight 13 ounces.
9 GT 41205Set \$7.97

CRAFTSMAN® Specialty Screwdrivers

(8) Offset Screwdriver. Use in tight places. Four 1/4-inch alloy steel blades.

ORDERING INFORMATION:
9 GT 4110—Shpg. wt. 6 oz.Set \$2.67

(9) Ratchet Offset Screwdriver. Nickel-plated steel body, alloy-steel blades. Reverses removing screws.

SIZES, ORDERING INFO: Wt. 4 oz.
9 GT 4117—1/4 and 3/8-in. bits . . .Set \$1.97
Nos. 1 and 2 Phillips bits
9 GT 4119Set 2.47
No. 2 Phillips, 1/4-in. bits
9 GT 4116Set 2.47

(10) Screw-holding Starter. Starts or removes most sizes of standard slotted screws. Tool steel blade and bit. Aluminum handle. Magnetic pick-up tip on handle.

SIZES, ORDERING INFO:
9GT41024-5 1/2 in. long. Wt. 3 oz. \$2.09
9GT41025-9 5/8 in. long. Wt. 4 oz. 2.29

(11) Magnetic-tip Screwdriver. Permanent magnet holds screws for starting. Aluminum shank, 4 steel bits: 3/16, 1/8-in. standard; Nos. 1, 2 Phillips. Hollow plastic handle stores bits, 8 in. long.

ORDERING INFORMATION:
9 GT 41467—Shpg. wt. 7 oz.Set \$3.67

Replacement Bit Set for (11).

ORDERING INFORMATION: Includes same four bits as in (11) above.
9 GT 41468—Shpg. wt. 4 oz.Set \$1.99

(12) 6-pc. Precision Screwdriver Set. Precision ground. Fine for hobbyists, jewelers—wherever tiny screws are used. Nickel-plated steel handle. Blades held in threaded chuck. Blades 3/4 in. long. Case.

SIZES, ORDERING INFO: Five blades: .040, .055, .070, .100 in., and Phillips type.
9 GT 4107—Shpg. wt. 4 oz.Set \$2.17

(13) 4-in-1 Screwdriver Set. Butyrate handle. Two reversible combination blades 6 1/2 in. long.

SIZES, ORDERING INFO: Nos. 1 and 2 Phillips and 1/4-in. and 3/16-in. standard ends.
9 GT 41504—Shpg. wt. 8 oz.Set \$3.97

(14) Cotter Key Extractor. Cork-screw action. Forged steel hook. Plastic handle. Measures 7 inches long.

ORDERING INFORMATION:
9 GT 4319—Shpg. wt. 6 oz.Set \$1.67

(15) Automatic-return Screwdriver. 19 in. extended. Turns right, left . . locks when closed. Chrome-plated metal parts. 3 alloy-steel bits.

SIZES, ORDERING INFO: No. 2 Phillips, 3/4, 3/32-in.
9 GT 3103—Shpg. wt. 1 lb. 3 oz. \$12.97

Replacement Bit Set for (15).

SIZES, ORDERING INFO: Includes No. 2 Phillips, 3/16, 1/4 and 3/32-inch bits as in (15). From Japan.
9 GT 4198—Shpg. wt. 5 oz.Set \$1.87

3-piece Phillips type Bit Set.

SIZES, ORDERING INFO: Nos. 1, 2 and 3. Fit (15), former 9-3470, 9-3101, other automatic screwdriver brands; 3/32-in. shanks. From Japan.
9 GT 4115—Shpg. wt. 4 oz.Set \$2.27

(16) Small Automatic-return Screwdriver. Like (15) but 10 in. long extended. Nickel-plated metal parts.

SIZES, ORDERING INFO: Four bits: sizes 5/64, 3/64 and 1/4-inch; No. 2 Phillips.
9 GT 3102—Shpg. wt. 11 oz.Set \$6.47

3-pc. Bit Set.

SIZES, ORDERING INFO: 3/32, 1/32-in., No. 2 Phillips-type. For (16) and former 9-3180, 9-3461, 9-3100.
9 GT 4153—Shpg. wt. 4 oz.Set \$1.87

(17) CRAFTSMAN Scratch Awl. 3 1/4-inch tempered steel blade mounted in a tough shockproof butyrate plastic handle.

ORDERING INFORMATION:
9 GT 41027—Shpg. wt. 4 oz.Set \$1.27

Power Hobby Tools add a professional touch to virtually any craft



Hobby Lathe
\$39.95

Lathe Chisel Set
\$9.95

Rotary Hobby Shaper
\$59.95

Hobby Scroll Saw
\$39.95

(1) **6-inch Hobby Lathe** can turn wood, plastics and soft non-ferrous metals.
MOTOR BEARINGS: Ball-bearing motor develops no-load speed of 3450 rpm.

CONSTRUCTION: High-impact plastic housing. Built-in drive center shaft lock lets you remove and attach headstock centers and face plate easily.

TURNING CAPACITY: 1½ in. diameter stock. Maximum length: 6 inches between centers.

ACCESSORIES: Includes tail, headstock centers, tool support, spanner wrench and instructions. Optional Lathe Chisel Set sold separately below.

ELECTRICAL INFO: 115-volt, 100-watt, 60-Hz. AC. UL listed. Six-foot, 3-wire cord.

ORDERING INFORMATION:

9 GT 2514—Shipping weight 6 lbs. 2 oz. . . \$39.95

(2) **Steel-tipped Chisel Set.** Wood handles.

SET COMPOSITION: Four chisels; 30° angle, 60° angle, round-end tool, parting tool.

ORDERING INFORMATION:

9 GT 25145—Shipping weight 8 oz. Set \$9.95

(6 thru 9) CRAFTSMAN® Replica Pocket Knives

The 50-year CRAFTSMAN reputation for fine quality and workmanship is reflected in this anniversary collection.

BLADE CONSTRUCTION: High-carbon steel blades. Nickel alloy bolsters. Brass linings and rivets.

HANDLE CONSTR: DuPont Delrin® in black or ivory.

(6) **The Lumberjack Knife.** 3¾ inches closed. Large clip; can opener; screwdriver; large pen knife.

ORDERING INFORMATION:

9 GT 95043—Shipping weight 6 ounces \$10.97

(7) **The Bowie Stockman.** Measures 4 inches closed. Clip with bar nail nick; sheepfoot; spey.

ORDERING INFORMATION:

9 GT 95044—Shipping weight 6 ounces \$12.97

(8) **The Jackknife.** 2¾ in. closed. Pen, clip blades.

ORDERING INFORMATION:

9 GT 95041—Shipping weight 4 ounces \$7.97

(9) **Executive Knife.** 2¾ in. closed. Pen, clip blades.

ORDERING INFORMATION:

9 GT 95042—Shipping weight 4 ounces \$7.97

(10 thru 13) CRAFTSMAN® Pocket Knives

BLADE CONSTRUCTION: Amazing Cutting Action blades made of hardened stainless steel. Bolsters of solid nickel alloy; end rivets and pivot pins of stainless steel; bolster linings and blade dividers of brass. Sharpening instructions.

HANDLE CONSTRUCTION: Break-resistant DuPont Delrin® plastic, American eagle design. Brushed finish handle.

(10) **The Outdoorsman with Cowhide Pouch.** Measures 5¼ in. long, closed. Two blades; clip, general purpose.

ORDERING INFORMATION:

9 GT 95026—Shipping weight 1 pound 7 ounces . . \$23.99

(11) **The Stockman.** Measures 4 inches closed. Three blades; clip, sheepfoot, carving.

ORDERING INFORMATION:

9 GT 95025—Shipping weight 7 ounces \$14.99

As (11) but stainless steel blades, rivets, pins. 3¼ in.

9 GT 9546—Shipping weight 4 ounces \$8.95

(12) **Gentlemen's Penknife.** 3¼ in. Clip blade, nail file.

ORDERING INFORMATION:

9 GT 95023—Shipping weight 5 ounces \$9.95

(13) **Gentlemen's Jackknife.** 3¼ in. Clip, sheepfoot.

ORDERING INFORMATION:

9 GT 95024—Shipping weight 6 ounces \$11.99

(14) **The Tool Kit Swiss-style Army Knife.** Cutting blade, pen blade, scissors, cap lifter-screw driver, can opener, reamer, corkscrew and long nail file. 3¾ in. long. Stainless steel blades, pivot pins, blade dividers. Nickel silver alloy linings. Red plastic handle, lanyard ring. Poland.

ORDERING INFORMATION:

9 GT 95032—Shipping weight 6 ounces \$14.95

(15) **The Angler.** As (14) above, but with serrated fish scaler-hook disgorging.

9 GT 95033—Shipping weight 7 ounces \$18.95

(3) **Rotary Hobby Shaper** with flexible shaft and swivel base. Shaft connects to slim-grip handpiece . . . ideal for those hard-to-reach spots. You can grind, polish, slot, deburr, sand, carve, sharpen, rout, cut and engrave. Use for wood, plastics, gems, leather, glass, metal and ceramics.

MOTOR, BEARINGS: Self-aligning ball bearings. Motor develops no-load speed of 25,000 rpm.

CONSTRUCTION: High-impact plastic housings. Detachable, 360° swivel base . . . mounts on bench or wall with hanger bracket, included. Vinyl covered shaft, 34 inches long.

ACCESSORIES: Incl. collet, instr. See ¼-in. Shank Accessories on page 19, Motor Speed Control, (5) at right.

ELECTRICAL INFORMATION: Operates on 115-volt, 95-watt, 60 Hz. AC. UL listed. Six foot, 3-wire cord.

ORDERING INFORMATION:

9 GT 25143—Shpg. wt. 4 lbs. 6 oz. . \$59.95

(4) **12-inch Hobby Scroll Saw** can cut patterns in soft wood up to 1½ in. thick and hard wood to ¾ in. thick. Cuts acrylics, thin gauge metal and leather.

MOTOR, BEARINGS: Ball bearing motor develops no-load speed of 3450 strokes per minute.

CONSTRUCTION: High-impact plastic housing. Throat capacity 12 in. Saw blade guard. Table 8x8 inches wide.

ACCESSORIES: Includes one fine and one coarse cutting blade. Operating instructions.

ELECTRICAL INFORMATION: 115-volt, 100-watt, 60 Hz., AC. UL listed. Six-foot, 3-wire cord.

ORDERING INFORMATION:

9 GT 25142—Shipping weight 9 lbs. 2 oz. \$39.95

(5) **Motor Speed Control** for (3) at left.

ELEC. INFO: 120-v., 60 Hz., AC. UL listed. 5-ft., 3-wire cord.

ORDERING INFORMATION:

9GT25144—Shpg. wt. 2 lbs. 1 oz. . \$19.95

(16) X-Acto® Tool and Knife Chest

Whether you work with wood, plastic, paper or soft metals this X-Acto® Tool and Knife Chest has virtually everything you'll need to complete the job. For the experienced hobbyist or as a complete set for the serious-minded beginner.

CONSTRUCTION: Blades and components are of high-carbon steel. Sturdy wood carrying case.

SET COMPOSITION: 4 routers, 4 gouges, 8 refill blades, razor saw blade, coping saw, block planer, tweezer, 2 knives (Nos. 1, 5), pliers, hammer set, hand drill, contoured sander set, file handle, 3 needle files, bench vise, 2 "C" clamps, heat sink, 2 screwdrivers, pin vise, 2 drill bits, chuck adapter, instr.

ORDERING INFORMATION:

9 GT 52689—Shpg. wt. 3 lbs. Set \$55.00

(17 thru 22) X-Acto® Knife Sets

CONSTRUCTION: These sets have high-carbon steel blades for precise cuts in wood, plastics, paper. Plastic case, except where indicated.

(17) **Craft Tool Set.** Walnut chest.

SET COMPOSITION: 2 knives, aluminum and grooved plastic handles, 8 assorted blades, block planer, tweezers, razor saw blade, screw-driver.

ORDERING INFORMATION:

9GT52676—Shipping wt. 1 lb. 8 oz. . Set \$10.99

(18) **Deluxe Carving Chest.**

SET COMPOSITION: Grooved plastic handle, 8 assorted blades, 6 gouges, 4 routers.

ORDERING INFORMATION:

9 GT 52675—Shipping weight 1 lb. 3 oz. . \$8.49

(19) **Whittler's Set.**

SET COMPOSITION: 6 special woodcarving handles fitted with assorted carving blades.

ORDERING INFORMATION:

9 GT 52613—Shipping wt. 15 oz. . . Set \$16.99

(20) **Hobby Set.**

SET COMPOSITION: Two aluminum handles, 1 grooved plastic, 14 assorted blades.

ORDERING INFORMATION:

9 GT 52682—Shipping wt. 13 oz. . . . Set \$4.99

(21) **Woodcarving Set.**

SET COMPOSITION: Grooved plastic handle, 6 gouge blades, 6 assorted flat blades, case (top not shown).

ORDERING INFORMATION:

9 GT 52677—Shpg. wt. 8 oz. Set \$5.49

(22) **All Purpose Knife Set.**

SET COMPOSITION: Two knives with aluminum handles, 10 assorted flat blades.


ORDERING INFORMATION:

9 GT 52662—Shpg. wt. 7 oz. Set \$3.79





**Our Finest
CRAFTSMAN®
Heavy-duty Brace**
\$18.95

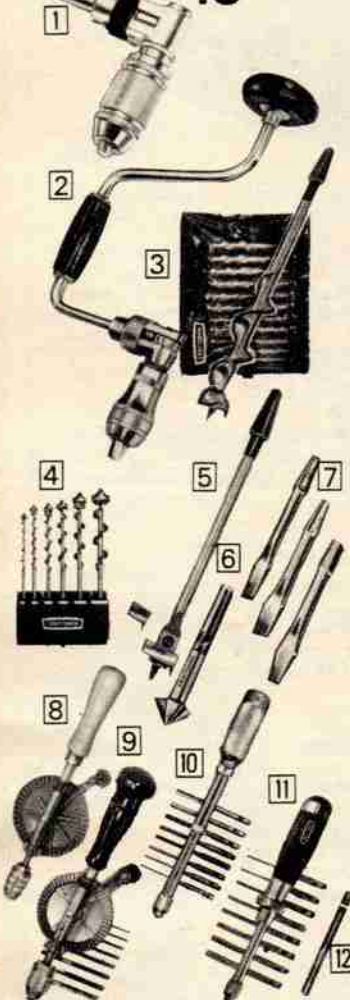

(13 thru 16) CRAFTSMAN® Forming Tools

CONSTRUCTION: Cut and form materials up to hardness of mild steel. Chisel-like teeth set in Sheffield Steel blade. Die-cast zinc alloy body.

(13) **Plane Type.** Plastic handle. 5x12½ in. long.
ORDERING INFORMATION:
9 GT 67722—Shipping weight 1 lb. 8 oz.\$5.97

Extra Blades for (13), (15). Shpg. wt. 5 oz.
9 GT 67731—Flat (1½ in. wide)\$1.77
9 GT 67732—Half-round (1½ in. wide) 1.97

(14) **Pocket Plane Type.** 2x5¼ in. long.
ORDERING INFORMATION:
9 GT 67723—Shipping weight 9 oz.\$2.67
Extra Blade for (14).
9 GT 67733—Shipping weight 3 oz.\$1.37

(15) **Round File Type.** Enlarges holes, shapes concave or circular wood cuts. Hardwood handle. Blade diameter ¾ in. 14 inches long.
ORDERING INFORMATION:
9 GT 67724—Shipping weight 8 oz.\$3.67

(16) **Flat File Type.** 1½x16 inches long.
ORDER INFO: Order extra blades under (13) above.
9 GT 67721—Shipping weight 1 lb. 2 oz.\$4.97

28 **Sears** COMPBK LAEGJB

(1) **CRAFTSMAN Heavy-duty Brace**
CONSTRUCTION: Built for heavy-duty service. Enclosed box ratchet keeps dirt out, reducing wear. . . never needs lubricating. Rugged steel frame is ½ in. in diameter. 10 in. sweep. Metal parts nickel-plated to resist rust. Steel reinforced high-impact plastic head turns smoothly on ball bearings. Brass reinforced center grip for added strength. Alligator-type chuck grabs both round and tapered-shank bits. . . holds them securely.
ORDERING INFORMATION:
9 GT 4241—Shpg. wt. 3 lbs. 1 oz.\$18.95

(3 thru 7) CRAFTSMAN® Bits for Braces

(3 and 4) **Solid-center Auger Bit Sets.** Professional-quality wood-boring bits for use with hand braces. . . wood-tested for dependability. Heat-treated, tempered carbon tool steel. Precision-milled and polished. Self-starting screw points are accurately centered. Spiral twists are uniformly ground to close tolerances for precision cutting, smooth, non-binding action.

(3) **13-pc. Set without caps.** Pouch incl. Sizes: ¼/16 thru 1-inch in 16ths.
ORDERING INFORMATION:
9 GT 41721—Wt. 3 lbs. 2 oz.Set \$30.79

(4) **6-pc. Set with caps.** Removable caps cover tips. Metal rack with pre-punched slots in back for mounting. Sizes: ¼, ¾, 1, 1½, 2, 3, 4, 1-in. diam.
ORDERING INFORMATION:
9 GT 4156—Wt. 1 lb. 12 oz.Set \$13.95

(5) **Expensive Bits.** For wood. Use one bit to cut holes of many sizes. 2 interchangeable, tempered steel blades with graduated ¼-in. settings. Change settings easily. Standard Clark pattern. Tapered square shank.

SIZES. ORDERING INFORMATION:
9 GT 41924—For ½ to 1½-in. holes. Wt. 6 oz.\$5.77
9 GT 41934—For ¾ to 3-in. holes. Wt. 10 oz. 6.77

(6) **Countersunk Bit.** For wood. Forged steel. ¾-in. size. ¼-in. combination shank fits braces, and drills.
ORDERING INFORMATION:
9 GT 4205—Shipping weight 3 ounces\$1.29

Hand Drills, Push Drills, Push Drill Points

(8 and 9) **Steel, 3-jaw chuck clamps** onto round-shank bits to ¼-in. diam.


(8) **Multi-purpose Hand Drill.** Nickel-plated steel frame, chuck nut. Double-pinion nylon gears. Hardwood handle. 10¾-in. long.
ORDER INFO: Order drill bits on pg. 16.
9 GT 4210—Shpg. wt. 15 oz.\$3.95

(9) **CRAFTSMAN Hand Drill Set.** 2-position handle. . . drill fast, slow. Pinion gears for smooth torque. 8 drill bits (¼ thru 1½-in.) stored in wood handle. Overall 11½-in. long.
ORDERING INFORMATION:
9 GT 4231—Weight 1 lb. 9 oz.\$10.39

(10) **CRAFTSMAN Professional-quality Push Drill Set.** Chrome-plated. Heavy-duty spring. Locking chuck. 8 drill points (¼ to 1½-in.). 12 in. long.
ORDERING INFORMATION:
9 GT 4222—Wt. 12 oz.\$12.89

(11) **CRAFTSMAN Push Drill Set.** Acetate handle, aluminum cap. 8 points (¼ thru 1½-in.). 8¾-in. long.
ORDERING INFORMATION:
9 GT 4221—Shpg. wt. 12 oz.\$10.89

(12) **8 CRAFTSMAN Replacement Push Drill Points.** (¼-1½-in.).
ORDERING INFORMATION:
9 GT 42216—Wt. 3 oz.Set \$3.95

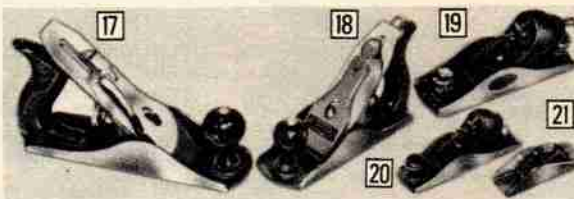

(17 thru 21) Planes

(17) **Our Finest CRAFTSMAN Bench Planes.** Cut with grain. Lever, screw device gives precise sidewise and depth adjustment for shaving cuttings tissue-thin to coarse-thick. Cast-iron sides and bottom milled, ground for accuracy. Double-plane cutter. . . blade, cap. Snug-fitting frog eliminates jumping, sideplay. Cutlery-steel blade 2-in. wide. Hardwood grips.
TYPES. LENGTHS. ORDERING INFORMATION:


Smooth No. 4. 9-in. long. Jack No. 5. 14-in. long.
Shpg. wt. 4 lbs. 2 oz. Shpg. wt. 5 lbs. 4 oz.
9 GT 37064\$17.89 9 GT 37065\$19.89

(18) **Sears Bench Plane.** All-purpose planing with the grain. Smooth No. 4. Cutlery-steel blade 2-in. wide. Tool 9-in. long.
ORDERING INFORMATION: Not Craftsman.
9 GT 37063—Shipping weight 4 lbs. 7 oz.\$12.89

(19 thru 21) **CRAFTSMAN Block Planes.** Use in one hand. . . makes easy work when job cannot be taken to bench or vise. Use for planing small pieces, beveling, planing corners, chamfering. Single-blade cutter set as low as 20° angle for cutting across grain. Adjust cutlery-steel blade for any shaving thickness.

LENGTHS. ORDERING INFORMATION:
(19) 6-in. long. (20) 7-in. long. (21) 3 ½-in. long.
Adj. side/end- Blade 1½-in. long. long. 1-in. blade.
wise. 1½-in. blade. Wood knob. Manual screw
Wt. 1 lb. 10 oz. Wt. 1 lb. 10 oz. lock. Wt. 5 oz.
9 GT 37052\$9.89 9 GT 37051\$7.89 9 GT 37057\$2.47

(2) **Medium-duty Brace**
CONSTRUCTION: Sturdy ¾-in. steel frame. Designed to handle all but heavy-duty jobs which require professional brace at left. Steel reinforced hardwood head. Hardwood center grip. 2-jaw chuck holds both round, tapered-shank bits. Semi-enclosed ratchet. Knurled ring. Exposed parts nickel-plated. 10-in sweep. Not Craftsman. Japan.
ORDERING INFORMATION:
9 GT 42402—Wt. 2 lbs. 5 oz.\$5.99

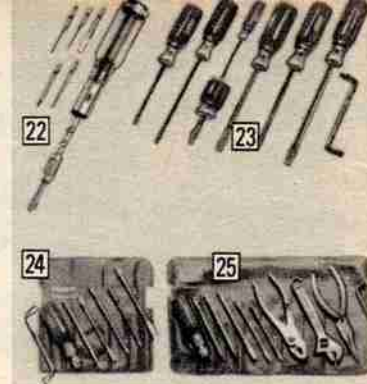

Screwdrivers, Repair Kit

(22) **Auto-return Screwdriver.** Carbon-steel blades. Spring-return action, blade spirals left, right. Handle compartment holds bits. 10½-in. long, extended. 6 bits: ¼, ⅜, ½, ¾, 1, 1½-in. drill bits, ¼-in., ½-in. and No. 2 Phillips screwdriver bits. Japan.
ORDERING INFORMATION:
9 GT 3105—Shpg. wt. 14 oz.\$4.97

Replacement Bit Set for (22). Includes same 6 bits as (22). Japan.
ORDERING INFORMATION:
9 GT 3106—Shpg. wt. 4 oz.Set \$1.09

(23) **8-piece Set.** Nickel-plated high-carbon steel blades. Plastic handles, and vinyl grips. 8 screwdrivers—¼x2-in., ⅜x4-in., ½x5-in., ¾-in. stubby, ⅝x6-in., No. 1 and 2 Phillips and ¼-in. offset.
ORDERING INFORMATION:
9 GT 41273—Wt. 1 lb. 7 oz.Set \$3.97

As (23) above, but no vinyl grips. 6 screwdrivers: No. 1 Phillips, ¼x6-in., ⅜x4-in., ½-in. stubby, and ½x2-in. pocket slot blades, and ½-in. offset.
ORDERING INFORMATION:
9 GT 41419—Wt. 1 lb. 1 oz.Set \$1.87

(24) **7-pc. Set.** 5 steel blades. Plastic handle. Offset screwdriver. 5 blades: ⅝x2½-in., ⅜x4-in., ½x4½-in., Phillips Nos. 1 and 2.
ORDERING INFORMATION:
9 GT 4181—Wt. 10 oz.Set \$1.99

(25) **Emergency Repair Kit.** Handle with ¼-in., ⅜-in., ½-in., Phillips Nos. 1 and 2 bits; offset screwdriver; 6-in. slip-joint pliers; 6-in. adjust. wrench; 6-in. long nose pliers. Pouch.
ORDERING INFORMATION:
9 GT 41877—Wt. 1 lb. 8 oz.Kit \$8.49



Miscellaneous Hand Tools

(26) **CRAFTSMAN Glass Cutter** with super-tough tungsten-carbide cutting wheel. Iron handle.
ORDERING INFORMATION:
Shipping weight 4 ounces.
9 GT 3797\$2.67

(27) **CRAFTSMAN Glass Cutter** with tungsten steel wheel. Malleable iron handle.
ORDERING INFO:
Shipping weight 4 ounces.
9 GT 379499c

(28) **CRAFTSMAN Scratch Awl.** 3¼-in. tempered steel blade mounted in a shockproof plastic handle.
ORDERING INFORMATION:
9 GT 41027—Shpg. wt. 4 oz.\$1.27

(29) **CRAFTSMAN Revolving Punch.** For leather, plastics, canvas, rubber. Nickel-plated steel. Sizes: ¼, ⅜, ½, ¾, 1, 1½, 2, 3, 4, 5, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100-inch.
ORDERING INFORMATION:
9 GT 4307—Shpg. wt. 12 oz.\$4.47

(1) Electric \$3450 Stapler

Powerful spring-tension mechanism drives staples flush. Uses 1/4 to 3/16-in., .050-wire staples. Lightweight—only 1 1/4 lbs.—yet perfectly balanced. Narrow design for tight areas. 8 3/4 inches long.

CONSTRUCTION: Steel base. Handle, motor housing of high-impact polymer. Safety lock on trigger switch.

ELECTRICAL INFO: 110-120-volt, 60 Hz. AC. UL listed. 6-ft. 3 wire cord.

ORDER INFO: Order extra staples below.
9 GT 6842—Wt. 3 lbs. 4 oz. \$34.50

(2) Heavy-duty Dual \$1499 Compression Stapler Kit

Dual-compression gives you increased power . . . all the power you need to install insulation, screening, upholstery, ceiling tile. Drives 1/4 thru 3/16-in. staples of .050-in. diam. steel wire.

CONSTRUCTION: Steel, rust-resistant baked enamel finish. Depress spring-tensioner to change from regular to high power. Stapler base slides open for re-loading. Built-in staple extractor. 7 in.

ACCESSORIES: Includes 2500 staples (high carbon-steel wire, 1000 each 1/4 and 3/16-in. size, and 500 3/16-in. size staples); belt hook; stretcher for fixing window and door screens; case.

ORDER INFO: Order extra staples below.
9 GT 6847—Wt. 3 lbs. 10 oz. . . Kit \$14.99

Stapler alone.
9 GT 6847—Shpg. wt. 2 lbs. 9 oz. . . \$12.99

(3) Heavy-duty Stapler Kit

Drives .050-in. diam. wire staples 1/4 to 3/16-in. long. Bottom opens to reload.

CONST.: Stamped steel with baked-enamel finish. Built-in staple extractor. Lock handle flat to store. 7 in. long.

ACCESSORIES: Includes 1000 staples (500 each 3/8 and 3/16-in. long), screen stretcher, and pouch.

ORDER INFO: Order extra staples below.
9 GT 6845—Wt. 2 lbs. 8 oz. . . Kit \$11.99

(4) Standard-duty Stapler

Drives .030-in. diameter wire staples (3/16-in. long) . . . see below (9 GT 68463).

CONST.: Stamped steel with baked-enamel finish. Built-in staple extractor. Handle locks for carrying. 6 in. long.

ORDERING INFORMATION:
9 GT 68464—Shpg. wt. 1 lb. 3 oz. . . \$5.88

Staples for (4). Measure .030-inch diameter and 3/16-inch long.

ORDERING INFO: Package of 1000.
9 GT 68463—Shpg. wt. 5 oz. . . . Pkg. 94c

Extra Staples for Manual, Electric Staplers (1) thru (3)

For Staplers (1) thru (3) above and former staplers 9-2645 and 9-6844. Steel wire, .050-inch in diameter, 1/2-inch wide.

ORDERING INFORMATION:

Length	Catalog Number	Shpg. wt.	Price package	Length	Catalog Number	Shipping weight	Price package
Package of 1,000				Package of 5,000			
1/4-in.	9 GT 68402	6 oz.	94c	1/4-in.	9 GT 68652	1 lb. 5 oz.	\$4.19
3/16-in.	9 GT 68658	7 oz.	94c	3/16-in.	9 GT 68653	1 lb. 9 oz.	4.19
1/2-in.	9 GT 68403	7 oz.	\$1.09	1/2-in.	9 GT 68654	1 lb. 12 oz.	4.49
3/4-in.	9 GT 68404	9 oz.	1.29	3/4-in.	9 GT 68656	2 lbs. 2 oz.	5.29
1-in.	9 GT 68659	9 oz.	1.29	1-in.	9 GT 68657	2 lbs. 6 oz.	5.29

(8 thru 10) Casters with rubber or Semi-steel wheels


CONSTRUCTION: Flat top plate with zinc-plated finish for rust-resistance, brightness. Baco® soft rubber tread on hard rubber core for quiet operation of items hand-pushed on hard and smooth floors. Atlasite® hard rubber tread on hard rubber core for shock-resistant performance on carpet and hard, smooth floors. Biron® powdered iron wheels for performance on rough or chip-littered floors. Semi-steel . . . semi-steel wheel for performance on wood and wood block floors as well as rough, chip-littered floors.

CAPACITIES AND ORDERING INFORMATION: Load capacities listed pertain to maximum load per caster when in motion. When load is motionless, weight capacities are doubled. See shipping note below right.

Capacities are loaded. See shipping note below right.									
Item	Load Cap. lbs.	Tread width in.	Ball Bearing Type	Rigid			Swivel		
				Cat. No.	Wt. lbs. oz.	Price Each	Cat. No.	Wt. lbs. oz.	Price Each
3-inch diameter wheel; caster height: 3 1/2-inches; swivel radius: 2 1/2 in.									
(8) Baco	125	1	self-lube	T9GT74478	1	6 13.99	T9GT74473	1	11 14.49
(8) Atlasite	210	1	self-lube	T9GT74471	1	8 3.99	T9GT74474	1	13 4.49
(9) Biron	250	1	plain*	T9GT74472	2	1 3.99	T9GT74475	2	5 4.49
4-inch diameter wheel; caster height: 5 inches; swivel radius: 3 1/2 inches									
(8) Baco	200	1 1/2	self-lube	T9GT74478	2	9 98.99	T9GT74479	3	5 98.99
(8) Atlasite	300	1 1/2	self-lube	T9GT74477	2	12 8.99	T9GT74481	3	9 8.99
(10) Semi-steel	350	1 1/2	plain*	T9GT74478	3	10 6.99	T9GT74482	4	7 8.99

*Wheel serves as its own bearing material

CRAFTSMAN® Staplers



CRAFTSMAN® Riveters

Tightly fasten sheet metal, wood, plastic, leather, and canvas

\$594
Kit

(5) Standard-duty Riveter Kit

CONSTRUCTION: Stamped steel frame; plastic grips on handles. Sliding nose piece lets you reload or change rivets quickly. Compact design for narrow spots. Accepts rivets 1/8 and 3/32-inch only (sold below).

ACCESSORIES: Includes 30 assorted rivets and 10 back-up plates.

ORDERING INFORMATION:
9 GT 7478—Wt. 1 lb. 1 oz. . . Kit \$5.94

Rivets for both riveters above. Use short-length rivets for work up to 1/8-inch thick; use medium-length for work 1/8 to 1/4-inch thick; long-length for 1/4 to 3/8-inch thick.

ORDERING INFORMATION:

Catalog Number	Length	Diam. in.	Box of	Wt. oz.	Per Box
Aluminum Rivets					
9 GT 74501	Short	1/8	50	3	94c
9 GT 74502	Med.	1/8	40	3	94c
9 GT 74503	Med.	3/32	35	4	94c
9 GT 74504	Long	3/32	35	4	94c
9 GT 74505	Med.	3/16	25	4	94c
9 GT 74506	Long	3/16	25	4	94c

\$1399

(6) Heavy-duty Riveter

Professional-quality riveter has power for variety of riveting jobs. CONSTR.: Steel construction, plastic-covered handles. Steel nose guide helps drive rivets firmly.

ACCESSORIES: 2 interchangeable nose pieces permit the use of all rivets sold below; plastic pouch.

ORDERING INFORMATION:
9 GT 7475—Wt. 1 lb. 8 oz. . . \$13.99

Catalog Number	Length	Diam. in.	Box of	Wt. oz.	Per Box
White Aluminum Rivets					
9 GT 74511	Short	1/8	50	3	94c
Steel Rivets					
9 GT 74507	Short	1/8	60	5	94c
9 GT 74508	Med.	1/8	50	5	94c
9 GT 74509	Long	1/8	45	5	94c

Back-up plates. (Not shown.) Help to hold 1/8-inch diameter rivets securely. For 1/8-inch diameter rivets in soft material and large holes. Box of 50.

ORDERING INFORMATION:

9 GT 74539—Shipping weight 4 ounces Box 64c

Whammer™ Nail Gun

For wall paneling, also hobbycrafts, securing molding **\$1795**

(7) Drives nails flush like a hammer, works like a staple gun to countersink nail with single blow.

CONSTRUCTION: Case-hardened steel housing, chrome-plated finish. Powerful spring-driven inner mechanism. Safety lock. Snap-on loading nose. Drives 1 1/2-in. long nails.

ACCESSORIES: Includes edge guide for even drive, plastic storage pouch, operating instr.

ORDERING INFO: Order nails below.
9 GT 6841—Shpg. wt. 2 lbs. 7 oz. \$17.95

Brad-type Whammer™ Nails with chiseled tips, 18-gauge steel. Measure 1 1/2-inch long.

COLORS, ORDERING INFO: Package of 500.
9 GT 68412—Off-white 9 GT 68413—Lt. wood
9 GT 68414—Med. wood 9 GT 68415—Dk. wood
Shipping weight 7 ounces Pkg. 89c



Heavy-duty Casters for office and industrial use

(11) CONSTRUCTION: Equipped with neoprene seals in bearing end washers so bearings withstand irregular lubrication maintenance. Tread width is 2 inches. Honcho® abrasion-resistant polyurethane tread boned to formed, welded steel core for heavily-loaded hand-pushed or conveyor-towed operation on hard floors or carpet, especially suited to industrial use, and use in commercial kitchens. Canaphin® phenolic plastic wheel reinforced with macerated canvas for resistance to many chemicals and heat up to 300° F. For heavy loads on hard floors, carpets. Bolts not included.

INSTALLATION, ORDERING INFO: See shipping note below. Easily accessible Alemite® fittings. Maximum load capacity per caster is 900 pounds when in motion; when load is motionless weight capacities are doubled.

Item	Wheel diam.	Caster height	Rigid			Swivel			
			Catalog Number	Wt. lbs. oz.	Price Each	Swivel radius	Catalog Number	Wt. lbs. oz.	Price
Honcho®	6 in.	7½ in.	T9 GT 74462	5 10	\$19.99	4 in.	T9 GT 74461	6 15	\$22.99
	8 in.	9½ in.	T9 GT 74466	7 10	21.99	4 in.	T9 GT 74465	8 14	26.99
Canaphin®	6 in.	7½ in.	T9 GT 74464	5 2	14.99	4 in.	T9 GT 74463	6 5	17.99
	8 in.	9½ in.	T9 GT 74468	6 14	18.99	4 in.	T9 GT 74467	8 2	21.99

SHPG. NOTE: Items with a "T" prefix (as T9 GT 74469) sent from Phil., Atl., Dal., Chi., L.A. Allow extra time. Pay shipping and handling charges from your Dist. Center.

Estimate distances quickly, automatically



Handy Rolling Measuring Wheel
\$29.99

To estimate distance just aim, focus and read

Optical Tapemeasure™ \$21.99

Estimate distances, simply by walking. Helps eliminate the need for a second person to hold tape measure.

OPERATION: Sealed counter records ft. and in. to 1000 ft. Push button to return counter to zero. Roll along line to be measured, then read counter.

CONSTRUCTION: High impact polypropylene case. Aluminum handle extends from 20 to 39 inches. Wheel diameter 4 inches. Neoprene tires.

ORDER INFO: Wt. 3 lbs. 2 oz. Instructions included.
9 GT 39004.....\$29.99

Take the bending, stooping and walking out of estimating distances. Estimate over water and objects.

OPERATION: Works like a camera rangefinder. Look at object through viewfinder, adjust knob to focus, then read scale. . . markings every inch at low end, every 10 ft. at high end. Focus from 6 to 100 ft. away.

CONSTRUCTION: Lightweight. . . weighs only 7 1/2 oz. Measures 5 1/2 x 3 1/4 x 1 1/2 in. thick. Dust-free case of rugged, high-impact polypropylene. Precision welded inner construction and shock absorbing optical mounts.

ACCESSORIES: Protective, padded carrying case. Instructions incl.

ORDERING INFORMATION:
9 GT 39009—Shpg. wt. 15 oz.\$21.99



CRAFTSMAN® flexible Steel Tapes

(1) Winding Reel Tape with vinyl covered case.

CONSTRUCTION: Flexible steel blade 3/8 in. wide. Sharp black markings on white enameled background for easy reading. Marked in 8ths of an inch. Stud markings every 16 in. Reel and folding handle are chrome plated. Double roller mouthpiece. Hook-and-ring permits one-man measuring. Choose 50 or 100 ft. blades.

ORDERING INFORMATION:
9 GT 39001—50-foot. Wt. 14 oz.\$9.47
9 GT 39002—100-foot. Wt. 1 lb. 7 oz.12.47

Replacement Blades for tapes above.

ORDERING INFORMATION:
9 GT 39031—50-foot. Wt. 13 oz.\$4.67
9 GT 39032—100-foot. Wt. 1 lb. 5 oz. 6.97

(2) CRAFTSMAN Lock Tape.

CONSTRUCTION: Flexible, easy-to-read Mylar** polyester coated blade. Press buttons to lock and return blade. Chrome plated zinc case attaches to belt.

ORDERING INFORMATION:
Marked in inches, graduated to 1/16 in.

Cat. No.	Wide in.	Long ft.	Wt. oz.	Each
9GT39213	3/4	10	11	\$5.47
9GT39214	3/4	12	11	5.97
9GT39215	3/4	16	14	6.97
9GT39217	3/4	20	14	7.97
9GT39209	3/4	25	13	9.47
9GT39222	1/2	10	9	3.97
9GT39223	1/2	12	9	4.47

As above but blade marked in inches and millimeters graduated to 1/16 in. and 1 mm. 12 ft. long (3.65 m).

9 GT 39224—1/2 in. wide. Wt. 9 oz.\$4.47
9 GT 39218—3/4 in. wide. Wt. 11 oz. 5.97

**Registered DuPont trademark

(3) Winding Reel Tape with chrome plated zinc case. Wind handle to return.

CONSTRUCTION: Flexible 3/8 in. wide steel blade. White enamel finish, black markings in 8ths of an inch. Stud markings every 16 inches. Adjustable end hook.

ORDERING INFORMATION:
9 GT 39008—50 foot. Wt. 1 lb. 3 oz.\$4.99
9 GT 39002—100 foot. Wt. 1 lb. 7 oz. 7.99

(4) CRAFTSMAN Push-pull Tape.

CONSTRUCTION: Blade 1/2 in. wide, 10 ft. long marked in 1/16 in. Chrome plated zinc case with belt clip.

ORDERING INFORMATION:
9 GT 39163—Shipping weight 9 ounces . \$2.87

Replacement Blades. Marked in 1/16 in. ORDER INFO: Order same size as old tape.

Cat. No.	Wide in.	Long ft.	Wt. oz.	Price
9GT39192	1/2	8	4	\$1.37
9GT39193	1/2	10	4	1.67
9GT39194	1/2	12	4	1.97
9GT39195	3/4	10	5	2.47
9GT39196	3/4	12	6	2.67
9GT39197	3/4	16	6	3.17
9GT39198	3/4	20	7	3.77
9GT39199	3/4	25	8	4.27

(5) CRAFTSMAN Slim Tape.

CONSTRUCTION: Flexible blade 1/4 in. wide, 8 feet long. Chrome plated zinc case. Marked in 1/16 inches.

ORDERING INFORMATION:
9 GT 39141—Shipping weight 4 oz.\$1.97

(6) Sears 6-foot Tape.

CONSTRUCTION: Blade 1/2 in. wide. Plastic case. Marked in 1/16 inches.

ORDERING INFORMATION:
9 GT 3916—Shpg. wt. 4 oz.89c

Levels with large, acrylic monovials for easy reading

(7 thru 11) You get pinpoint accuracy thru a full 360° rotation for both plumb and level readings. Levels feature barrel shaped monovials of tough acrylic, almost 20% larger than standard vials for easy reading.

(7) Sears 24-inch Level.

MONOVIALS, FRAME: Aluminum with 3 vials; 2 plumb, 1 level.

ORDERING INFORMATION:
9 GT 39955—Shipping weight 1 pound 6 ounces\$5.97

(8 and 9) **CRAFTSMAN® Levels.** All but 78 inch have easy-to-read top window.

FRAME: Aluminum frame has closed ends for strength. **MONOVIALS, ORDERING INFORMATION:**

Catalog Number	Length inches	Vials			Shpg. wt.		Price
		Plumb	Level	45°	lbs.	oz.	
9 GT 39922	18	1	1	1	1	4	\$7.97
9 GT 39924	24	2	1	...	1	8	8.97
9 GT 39925C	28	2	1	...	2	...	9.97
9 GT 39926C	48	2	2	...	3	...	17.95
9 GT 39918L	78	3	2	...	6*	...	34.95

*If mailed, takes 15 pound rate, see page 92.

(10) **CRAFTSMAN 24-inch Level.** Sears Best level has 360° protractor vial that reads at any angle.

MONOVIALS, FRAME: Lightweight aluminum with 1 plumb, 1 level monovial. Closed ends for strength. One magnetic edge.

ORDERING INFORMATION:
9 GT 39928—Shipping weight 1 pound 11 ounces ..\$10.97

(11) CRAFTSMAN 9-inch Torpedo Level.

Fits easily in tool box or pocket. **MONOVIALS, FRAME:** 3 vials; 1 level, 1 plumb and 1 45°. Aluminum frame has one magnetic edge.

ORDERING INFORMATION:
9 GT 39833—Shipping weight 7 ounces\$4.97


Torpedo Level, as above but not magnetic.

ORDERING INFORMATION:
9 GT 39824—Shipping weight 7 ounces\$3.97

(12) Magnetic Protractor Level.

CONSTRUCTION, MONOVIAL: Plastic. Measures 2 1/2 x 2 1/2 x 3/4 inches overall. One monovial. Reads plumb or level within 1/2°. Scale for pitch readings.

ORDERING INFORMATION:
9 GT 3990—Shipping weight 4 ounces.....\$2.97

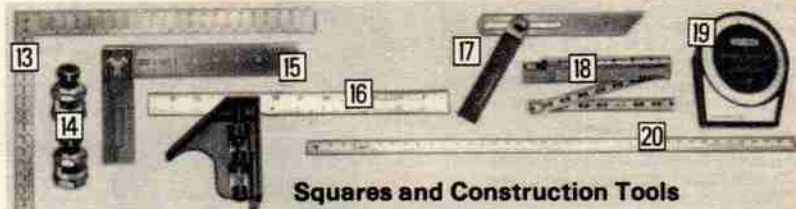

Squares and Construction Tools

(13) CRAFTSMAN Aluminum Rafter Square.

CONSTRUCTION: Our finest square. Made of hardened aluminum. . . won't rust or warp. Octagon and 100ths scale. Rafter and brace table. Precision graduations. Face marked in 8ths, 16ths; back marked in 10ths, 12ths. Black numbering. Measures 24x2 in. body and 16x1 1/2 in. tongue.

ORDERING INFORMATION:
9 GT 39644C—Shpg. wt. 2 lbs.\$11.47

CRAFTSMAN Steel Rafter Square.

CONSTRUCTION: Same as above only steel, hard tempered and lacquer coated.

ORDERING INFORMATION:
9 GT 39641C—Shpg. wt. 3 lbs.\$6.95

Sears Steel Square (not shown).

CONSTRUCTION: Face marked in 8ths, 4ths; back in 4ths. Hard tempered steel, lacquer coated. Body 24x2 in.; tongue 16x1 1/2 in. Rolled graduations.

ORDERING INFORMATION:
9 GT 39642C—Shpg. wt. 3 lbs.\$3.97

Economy Steel Square (not shown).

CONSTRUCTION: Green markings in 8ths, both sides. Body 12x1 1/2 in.; tongue 8x1 in.

ORDERING INFORMATION:
9 GT 39643—Shpg. wt. 12 oz.\$1.77

(14) Angle or Stair Gauge. Use on rafter or framing squares for repeating angles.

CONSTRUCTION: Brass. Steel screw. **ORDERING INFORMATION:** Package of 2.
9 GT 3956—Shpg. wt. 4 oz.Pkg. 99c

(15) CRAFTSMAN Try Square.

CONSTRUCTION: Eight-inch polished steel blade. Yellow markings top, bottom, both sides. Hardwood handle, brass trim.

ORDERING INFORMATION:
9 GT 39594—Shpg. wt. 10 oz.\$5.47

(16) CRAFTSMAN Combination Square.

CONSTRUCTION: Chrome plated steel blade 12x1 in. Black markings: 8ths, 16ths on one side; 16ths, 32nds on other. Cast iron 4 in. head has extra large level vial, removable scribe. Brass head tightener.

ORDERING INFORMATION:
9 GT 39543—Shpg. wt. 1 lb. 1 oz.\$6.97

(17) CRAFTSMAN Sliding "T" Bevel.

Divides or transfers angles, checks edges.

CONSTRUCTION: Adjustable 8 in. steel blade. Hardwood handle with brass trim.

ORDERING INFORMATION:
9 GT 39485—Shpg. wt. 7 oz.\$4.47

(18) CRAFTSMAN 6-ft. Extension Folding Rule. Outside reading.

CONSTRUCTION: Brass extension. Embedded marks in 16ths of an inch, both edges. Stud marks every 16 inches. Brass strike plates. Basswood finish. 3/8 inch wide.

ORDERING INFORMATION:
9 GT 3931—Shpg. wt. 9 oz.\$4.67

(19) CRAFTSMAN Automatic Protractor.

CONSTRUCTION: Sturdy plastic. Easy-to-read 4 in. diameter face reads within plus or minus 1/2°. Gives direct readings at any angle. Has smooth magnetic base, adheres easily to steel carpenter's square. Measures 4 1/2 x 3 x 5 inches high.

ORDERING INFORMATION:
9 GT 3995—Shpg. wt. 10 oz.\$8.47

(20) CRAFTSMAN Meter Stick. Tables convert English Standard to metric.

CONSTRUCTION: Graduations in mm. and in. Lightweight, flexible aluminum won't crack. Measures 39 1/2 in., 1 meter.

ORDERING INFORMATION:
9 GT 3762C—Shpg. wt. 1 lb.\$1.67

Leather Tool Holders

(1) 8 pocket, 2 bag Apron
CONST: Split cowhide. Split leg. Linen stitching, steel rivets.
COMPARTMENTS: 2 large nail bags, 2 medium front pockets. Steel tape holder, strap loop on both sides. Holster for square. Polypropylene web belt adjusters.
ORDERING INFORMATION:
9 GT 45149—Wt. 2 lbs. 4 oz. ...\$14.99



(2) 6-pocket Nail, Tool Bag
CONST: Glove leather.
COMPARTMENTS: Large and medium nail, 4 side pockets. 2 hammer loops, tunnel belt loop.
ORDER INFO: 10 1/2 x 12 in.
9 GT 45143—Wt. 1 lb.\$9.95



(3 thru 6) Tool Holders
CONSTRUCTION: Top grain saddle leather, oversized rivets.


(3) Electrician's Tool Holder
COMPARTMENTS: Main, 3 front, 2 side pockets. Hammer loop, tape holder, tool snap, tape chain.
ORDER INFO: 9x8 3/4 in.
9 GT 45447—Wt. 1 lb. 4 oz. ...\$8.95



(4) 5-pocket Tool Holder
COMPARTMENTS: Partitioned main, 3 front, 2 open-end side pockets, side loop, tape chain, tool snap, tunnel belt loop. 8x10 in. Pocket for steel tapes.
ORDERING INFORMATION:
9 GT 4580—Wt. 1 lb. 6 oz. ...\$10.95



(5) 6-pocket Tool Holder
COMPARTMENTS: Large main, 2 front, 2 open-end side pockets, steel tape holder, tape chain, tool snap, wide belt slots. 9x8 3/4 in.
ORDERING INFORMATION:
9 GT 45446—Wt. 13 oz.\$5.95



(6) 5-pocket Tool Holder
COMPARTMENTS: Partitioned main, 3 front pockets. Strap loop, tape chain, tool snap. Belt slots. 9x8 3/4 in.
ORDERING INFORMATION:
9 GT 45805—Wt. 1 lb.\$6.95



(7) Adjustable Belts. From 29 to 46 in. Nickel-plated fittings. TYPE. ORDER INFORMATION:

Cotton Web. 2 1/4 in. wide.
9 GT 45895—Wt. 11 oz.\$3.99
Leather Belt (not shown). 1 3/4 in. wide. Top grain saddle leather.
9 GT 45891—Wt. 9 oz.\$3.99




OUR FINEST LEATHER WORK APRON

Like all of our finest-quality hardware needs, it had to earn the right to wear the name

CRAFTSMAN®

Here's what makes our finest Work Apron so outstanding:

- A** All cotton-web belt with nickel plated steel fittings
- B** Metal and leather holster for combination square. Easy sliding in and out
- C** All nail pockets are leather-bound around edges for long wear
- D** 6-inch wide nail pockets are riveted to front of 9-inch flared nail bags
- E** Tape holder is large enough to hold even a 1-in. by 25-ft. tape
- F** Oversized rivets capped on both sides at stress points for added strength
- G** Top-grain select hides... smooth "ball glove" leather on inside of pockets
- H** Durable linen thread... strong lock stitch on all seams plus double row stitching at all stress points

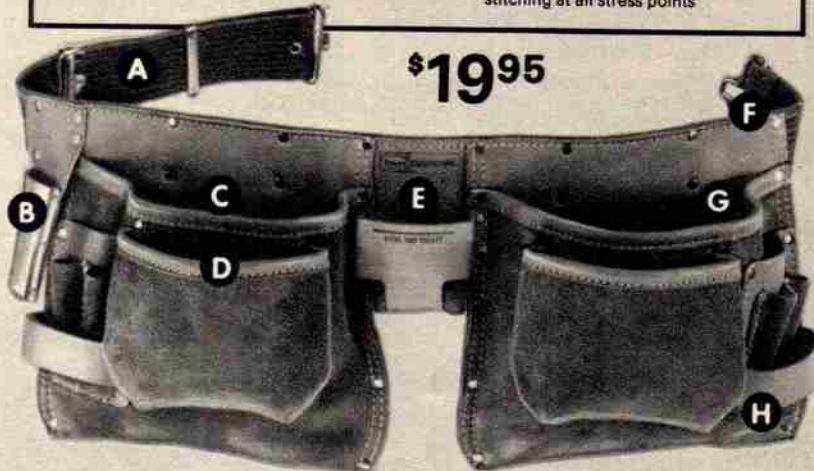


\$19.95

CONSTRUCTION: Top-grain select hides, smooth "ball glove" leather on inside of pockets. Nail pockets are leather-bound around edges. Double row stitching at stress points with linen thread. Oversized rivets capped on both sides. All cotton-web, 2 3/4 inch wide belt with nickel plated steel fittings. Split leg design for comfort.

COMPARTMENTS: Two 9-in. wide flared, two 6-in. wide front nail pockets; 6 side pockets. Four nail set slots. Holder for steel tape. Aluminum and leather holster for combination square. Loop for hammer or other tools on both sides. Web belt adjusts to fit.
ORDERING INFORMATION:
9 GT 45147—Shpg. wt. 2 lbs. 4 oz.\$19.95

Construction and Masonry Specialty Tools

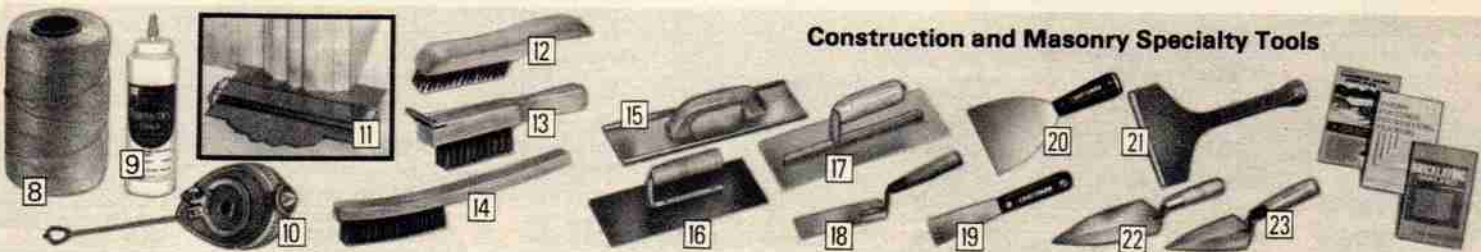

(8) Nylon Twine. 100 yds. No. 21. 177-lb. test. White.
ORDERING INFORMATION:
9 GT 78551—Wt. 10 oz.\$1.49

(9) Powdered Carpenters' Chalk. For use with (10) below. 8 oz. squeeze bottle.
COLOR. ORDER INFO:
9GT37587—Blue. Wt. 11 oz. .97c
9GT37588—Red. Wt. 11 oz. .97c

(10) CRAFTSMAN Dual-purpose Chalk and Plumb Line. Full rewind cylinder; fold-away handle. Slide-action brake releases automatically. Die-cast case. Combination refill cap, plumb bob tip. Hook-ring on end.
SIZE. ORDER INFO:
50-foot Line.
9 GT 3773—Wt. 11 oz.\$2.97
100-foot Line.
9 GT 37734—Wt. 12 oz.\$3.47

(11) Contour Gauge. Stainless steel needles form 6-in. row of contour. Plastic-coated steel body. W. Germany.
ORDERING INFORMATION:
9 GT 3946—Wt. 10 oz.\$4.49

(12) Down-curved back Wire Brush. 4 rows, 16 tufts. 1 1/4 x 10 x 1 in. Wood handle.
ORDERING INFORMATION:
9 GT 3669—Wt. 9 oz.\$1.29

(13) Brush and Scraper. 4 rows of 10 tufts. Measures 1 1/2 x 11 x 1 1/2 in. wide with 2 1/2 in. steel scraper. Wood handle.
ORDERING INFORMATION:
9 GT 3647—Wt. 15 oz.\$1.97

(14) Curved back Wire Brush. 3 rows of 19 tufts. 1 1/4 x 14 x 1 in. Wood handle.
ORDERING INFORMATION:
9 GT 3668—Wt. 9 oz.\$79c

(15) Aluminum Float. For floating cement to surface before troweling. 14 x 4 x 1/4 in. deep. Wood handle.
ORDERING INFORMATION:
9 GT 65442—Wt. 14 oz.\$3.27

(16) Trowel. Spring steel. 4 1/2 x 10 inches. Wood handle, steel shank.
ORDERING INFORMATION:
9 GT 6592—Wt. 13 oz.\$1.97

(17) CRAFTSMAN Finishing Trowel. Spring steel. 4 3/4 x 11-in. blade. Aluminum alloy shank, wood handle.
ORDERING INFORMATION:
9 GT 6550—Wt. 1 lb. 2 oz.\$5.47

(18) CRAFTSMAN Patching Trowel. Steel. Blade 1 3/4 x 5 1/2 inches. Wood handle.
ORDERING INFORMATION:
9 GT 6589—Wt. 5 oz.\$1.87

(19) CRAFTSMAN Putty Knives. Carbon steel blade, 1 1/4 in. wide. Plastic handle.
ORDER INFO: Wt. 5 oz.
9 GT 90151—Flexible.....\$1.57
9 GT 90161—Stiff.....1.67
9 GT 90091—Chisel-point . 1.87

(20) CRAFTSMAN Wall Scrapers. Flexible, carbon steel blades. Plastic handle with brass hammerhead for resetting drywall nails.
SIZE. ORDER INFO:
Four-inch blade.
9 GT 90054—Wt. 6 oz.\$2.97
Six-inch blade.
9 GT 90056—Wt. 7 oz.\$3.97
3-in. without hammerhead.
9 GT 90171—Wt. 6 oz.\$2.17

(21) CRAFTSMAN Bricklayers' Chisel. Forged steel. 4-in. bit. Single bevel edge.
ORDERING INFORMATION:
9 GT 6558—Wt. 1 lb. 2 oz.\$3.97

(22) Philadelphia-pattern Brick Trowel. Tempered steel. 4 1/2 x 8 1/2 in. Wood handle.
ORDERING INFORMATION:
9 GT 6556—Wt. 11 oz.\$2.97

(23) CRAFTSMAN Pointing Trowel. Blade, 2 3/4 x 5 1/2 in. Wood handle.
ORDERING INFORMATION:
9 GT 6581—Wt. 6 oz.\$1.97

How-To Booklets
TITLE. ORDER INFO: State catalog number and booklet number.

Bk. no.	Title	Wt. oz.
617	Concrete Work Simplified	6
697	Forms, Footings, Foundations, Framing	10
668	Bricklaying Simplified	10

9 GT 2915H.....Each \$2.50

CRAFTSMAN® Pipe Threading Tools



Ratchet-action Pipe Threaders

(1) **Heavy-duty Pipe Threader Stock**
Single-pawl, ratchet-action. Die shown not included.

CONSTRUCTION: Cast-iron head on steel handle stock.

SIZES AND ORDERING INFORMATION:

Threader Stock for use with 2x2-in. dies.

9 GT 54802—Wt. 4 lbs. 5 oz. \$23.99

Threader Stock for use with 2½x2½-in. dies.

9 GT 54803—Wt. 4 lbs. 15 oz. \$25.99

Threader Stock for use with 4x4-in. dies.

9 GT 54804C—Shpg. wt. 7 lbs. \$34.99

Metal Rack for 2x2-in. pipe threading equipment (not shown). Holds threader, 5 dies, 5 bushings (not included).

ORDERING INFORMATION:

9 GT 54805—Wt. 2 lbs. 7 oz. \$3.89

Metal Rack for 2½x2½-in. pipe threading equipment (not shown). Holds threader, 4 dies, 4 bushings (not included).

ORDERING INFORMATION:

9 GT 54806—Shpg. wt. 3 lbs. 7 oz. \$4.49

(2) **Thread Cutting Oil**

Preserves die tempers.

SIZES AND ORDERING INFORMATION:

9 GT 55211—½-pint. Wt. 12 oz. \$1.99

9 GT 55212—1-quart. Wt. 2 lbs. 6 oz. 2.79

CRAFTSMAN® Professional-quality Pipe Dies and Solid Guide Bushings

(3) **Solid 2x2-in.
Pipe Dies.**

Fit 2x2-in. stock. Chip-ejecting and self-feeding.

SIZES, ORDER INFO:

Wt. 10 oz. Each \$10.49

Catalog No. For pipe diam.

9 GT 55101 ¼-inch

9 GT 55102 ½-inch

9 GT 55103 ¾-inch

9 GT 55104 1-inch

9 GT 55105 1½-inch

(4) **Solid Guide
Bushings.**

Use with 2x2-in. solid dies only.

SIZES AND ORDERING INFORMATION:

Wt. 8 oz. Each \$2.89

Catalog No. For pipe diam.

9 GT 5464 ¼-inch

9 GT 54641 ½-inch

9 GT 54642 ¾-inch

9 GT 54643 1-inch

9 GT 54644 1½-inch

13-piece 2x2-in. Pipe Threading Set.

SET COMPOSITION: Includes 2x2-in. threader stock, rack, dies, bushings for ¼, ½, ¾, 1-inch pipe. Also with ½-pint of thread cutting oil to preserve die temper.

ORDERING INFORMATION:

Shipping weight 11 pounds.

9 GT 5387C Set \$89.99

9-piece 2x2-in. Pipe Threading Set.

SET COMPOSITION: 2x2-in. threader stock, rack, dies, bushings for ¼, ½, 1-in. pipe. ½-pint thread cutting oil to preserve die temper.

ORDERING INFORMATION:

Shipping weight 10 pounds.

9 GT 5386C Set \$65.99

(3) **Solid 2½x2½-in.
Pipe Dies.**

Fit 2½x2½-in. stock.

Chip-ejecting, self-feeding.

SIZES AND ORDERING INFORMATION:

Wt. 14 oz. Each \$10.99

Catalog No. For pipe diam.

9 GT 54701 ¼-inch

9 GT 54702 ½-inch

9 GT 54703 ¾-inch

9 GT 54704 1-inch

9 GT 54705 1½-inch

9 GT 54706 2-inch

(5) **Solid Guide
Bushings.**

Use with 2½x2½-in. solid dies only.

SIZES AND ORDERING INFORMATION:

Wt. 9 oz. Each \$3.39

Catalog No. For pipe diam.

9 GT 5465 ¼-inch

9 GT 54651 ½-inch

9 GT 54652 ¾-inch

9 GT 54653 1-inch

9 GT 54654 1½-inch

9 GT 54655 2-inch

11-piece 2½x2½-in. Pipe Threading Set.

SET COMPOSITION: 2½x2½-in. threader stock, rack, dies, bushings for ¼, ½, 1, 1½-in. pipe. ½-pint thread cutting oil to help preserve die temper.

ORDERING INFORMATION:

9 GT 5391C—Shipping weight 14 pounds Set \$84.99

(3) **Solid 4x4-in.
Pipe Dies.**

Fits 4x4-in. stock. Chip-ejecting and self-feeding.

SIZES AND ORDERING INFORMATION:

Wt. 1 lb. 6 oz. Each \$15.99

Catalog No. For pipe diam.

9 GT 54721 ¼-inch

9 GT 54722 ½-inch

9 GT 54723 ¾-inch

9 GT 54724 1-inch

9 GT 54725 1½-inch

9 GT 54726 2-inch

(6) **Solid Guide
Bushings.**

Use with 4x4-in. solid dies only.

SIZES AND ORDERING INFORMATION:

Wt. 12 oz. Each \$4.49

Catalog No. For pipe diam.

9 GT 5466 ¼-inch

9 GT 54661 ½-inch

9 GT 54662 ¾-inch

9 GT 54663 1-inch

9 GT 54664 1½-inch

9 GT 54665 2-inch

8-piece 4x4-in. Pipe Threading Set.

SET COMPOSITION: 4x4-in. threader stock, dies, bushings for 1½, 2-in. pipe. ½-pint thread cutting oil to help preserve die temper.

ORDERING INFORMATION:

9 GT 5388C—Shipping weight 16 pounds Set \$77.99



CRAFTSMAN® Regular-action Pipe Threader Set

(7) **CRAFTSMAN Solid 2-die Pipe Threader Set.**
2x2 inch dies. Self-feeding, inserted tool steel cutters. Solid guide bushings. Cuts threads on pipes with ½ and ¾-inch outside diameters. Taper threads provide tight joints. Includes ½-pint of thread cutting oil to preserve die temper.

ORDERING INFORMATION:

9 GT 5524—Shpg. wt. 5 lbs. 14 oz. Set \$38.99

(8) **Guide Bushings.** For use with pipe threader 9 GT 5524 above with solid 2x2-inch dies only.

CAPACITY, ORDERING INFORMATION:

Shipping weight each 8 oz.

9 GT 5463—For ¼-in. pipe diameter \$2.59

9 GT 54631—For ½-in. pipe diameter 2.59

9 GT 54632—For ¾-in. pipe diameter 2.59

9 GT 54633—For 1-in. pipe diameter 2.59

9 GT 54634—For 1½-in. pipe diameter 2.59

Vises, Cutters and Taps for cutting tubing or pipe

(9) **Pipe Vise.** Malleable iron frame. Steel jaws. Easy release with pipe support. Takes ½ to 1½-inch outside diameter pipe.

ORDERING INFORMATION:

Shipping weight 3 lbs. 15 oz.

9 GT 5551 \$16.99

(10) **Chain-type Pipe Vise.** 8000-pound breaking strength. Ductile iron frame and jaws. Takes ½ to 3-inch outside diameter pipe.

ORDERING INFORMATION:

Shipping weight 5 lbs. 10 oz.

9 GT 5557 \$21.99

(11) **CRAFTSMAN Pipe Cutter.** Cast-iron head, steel handle. Alloy steel cutting wheel. Two rollers. No. 2 size, cuts ½ to 2-inch outside diameter pipe.

ORDERING INFORMATION:

Shipping weight 6 pounds.

9 GT 55072 \$44.99

Replacement Cutting Wheel for (11).

9 GT 55033—Shpg. wt. 2 oz. \$2.49

(12) **Saunders-type Pipe Cutter.**

Tool-steel cutting wheel, 2 steel rollers.

SIZES, CAPACITIES, ORDER INFO:

No. 1 cuts ½ to 1-in. outside diameter.

9 GT 55023—Wt. 2 lbs. 15 oz. \$15.49

No. 2 cuts ½ to 2-in. outside diameter.

9 GT 55024—Wt. 5 lbs. 7 oz. \$19.99

Replacement Cutting Wheels. No. 1 is for 9GT55023, former 9-55021. No. 2 is for 9GT55024, former 9-5507, 9-55022.

SIZES, ORDERING INFORMATION:

9 GT 55031—No. 1. Wt. 2 oz. \$2.99

9 GT 55032—No. 2. Wt. 2 oz. 2.99

(13) **Taper-style Pipe Tap.** Kromed® steel, chrome-plated. Self-threading.

SIZES, ORDERING INFORMATION:

Catalog No. Size Threads per in. Shpg. wt. Each

9 GT 54531 ½-in. 27 3 oz. \$1.29

9 GT 54532 ¾-in. 18 4 oz. 1.69

9 GT 54533 1-in. 18 5 oz. 2.19

9 GT 54534 1½-in. 14 6 oz. 3.19

9 GT 54535 2-in. 14 10 oz. 4.89

9 GT 54536 1-in. 11½ 1 lb. 7.49



MAPP® Gas Kits and Accessories

(14) **16-piece Kit.** MAPP® Gas torches burn hotter, faster and use less fuel than propane torches at right. Each cylinder contains 14% more usable fuel than comparable propane cylinders. You can use MAPP® Gas for home or shop jobs. It's the ideal tool for thawing frozen pipes, customizing cars, paint removal, soldering, even brazing copper and steel.

KIT COMPOSITION: Fuel-saving torch with pressure regulator, standard tip, 16-oz. by weight cylinder; extra cylinder; spark lighter; 6 extra flints; 5 brazing rods; extra tip for detailed hobby work; plastic case; instructions.

ORDER INFO: See "N" suffix note, page 92.

9 GT 54332N—Shpg. wt. 8 lbs. Kit \$29.99

MAPP® Gas Cylinder. Holds 16-oz. by wt.

ORDER INFO: See "N" suffix note, p. 92.

9 GT 54921N—Shpg. wt. 3 lbs. \$3.39

Case of 12 MAPP® Gas Cylinders. Each holds 16 ounces by weight.

ORDER INFO: See "N" suffix note, p. 92.

9 GT 54924N—Shpg. wt. 26 lbs. Pkg. \$35.99

Spark Lighter. Protective cap shields you from sparks. Includes one flint.

ORDERING INFORMATION:

9 GT 5440—Shipping weight 4 ounces 59c

Propane Kits and Accessories

(15) **13-piece Kit.**

KIT COMPOSITION: Fuel-saving torch has instant-action lever; pencil flame burner; 14.1-oz. by wt. cylinder; extra cylinder; utility burner; spark lighter; 6 extra flints; plastic case; soldering tip and flame spreader that fit the pencil flame and utility burners, respectively.

ORDER INFO: UL listed. See "N" suffix note, page 92.

9 GT 54285N—Wt. 7 lbs. \$17.99

Instant-action Torch alone. As in kit above. With pencil flame burner, cylinder. UL listed.

ORDER INFO: See "N" suffix note, page 92.

9 GT 54281N—Wt. 3 lbs. \$11.99

Regular-action Torch. As torch above, but without instant-action lever. With pencil flame burner and cylinder. UL listed.

ORDER INFO: See "N" suffix note, page 92.

9 GT 54251N—Wt. 3 lbs. \$7.99

6-piece Kit. (Not shown.)

KIT COMPOSITION: Regular-action torch; pencil flame burner; 14.1-ounce by weight cylinder; needle valve for positive shut-off; utility burner; spark lighter; soldering tip; flame spreader; plastic case.

ORDER INFO: UL listed. See "N" suffix note, page 92.

9 GT 54261N—Wt. 4 lbs. \$15.99

Extra Propane Cylinder.

Fits Sears torches, most other makes. Holds 14.1 ounces by weight, 26.7 fluid ounces.

ORDER INFO: See "N" suffix note, p. 92. Wt. each 3 lbs.* Wt., pkg. of 12, 24 lbs.*

9 GT 5491N Ea. \$1.59; 2 for \$2.95

9 GT 54914N—Pkg. of 12 \$16.99

Jumbo Propane Cylinder. (Not shown.) Tank holds 16.4 oz. by weight, 31.1 fluid ounces.

ORDER INFORMATION: See "N" suffix note on page 92.

9 GT 54912N—Wt. 3 lbs. \$1.79





Pipe and Plumbing Wrenches

(1) **CRAFTSMAN Big Strap Wrench.** Cast-iron handle, 12 inches long. Adjustable nylon strap helps protect finish of nickel, chrome-plating or plastic pipes and tubing. $\frac{1}{8}$ to 2-inch capacity.

ORDERING INFORMATION:
Shipping wt. 2 lbs. 2 oz.
9 GT 55708 \$10.49

(2) **Angle Tapered Seat Wrench.** Cadmium-plated steel. Fits square or hex holes... step-style gives a positive grip... no more stripping. "L" shaped to give you just the right angle to remove or insert all types of faucet seats.

ORDERING INFO: *Not Craftsman.*
9 GT 55652—Shpg. wt. 11 oz. \$2.99

(3) **CRAFTSMAN Basin Wrench.** Steel handle measures 11 inches long. Self-adjusting, forged-steel jaws with return spring. Capacity of $1\frac{1}{8}$ inches.

ORDERING INFORMATION:
9 GT 55686—Wt. 1 lb. 4 oz. \$3.99

(4) **Adjustable Slip and Lock-nut Wrench.** Cadmium-plated malleable iron, $10\frac{1}{2}$ inches long. Sliding jaws shaped for slip-nuts on "P" or "S" sink traps, lock-nuts, spud nuts and bonnet caps. $\frac{3}{4}$ to 3-inch jaw capacity.

ORDERING INFO: *Not Craftsman.*
9 GT 55651—Wt. 1 lb. 10 oz. \$6.99

(5) **CRAFTSMAN Heavy-duty Pipe Wrench.** One-piece cast-iron housing, frame, handle. Forged-steel jaws. Milled teeth are pitched.

SIZE, ORDERING INFORMATION:

Catalog Number	Size in.	Cap. in.	Wt. lbs. oz.	Price
9 GT 55675	8	1	1 1	\$5.49
9 GT 55676	10	$1\frac{1}{2}$	2 2	7.49
9 GT 55677	14	2	3 14	10.49
9 GT 55678	18	$2\frac{1}{2}$	6 3	13.49
9 GT 55679	24	3	9 15	21.99
9 GT 5567C	36	5	19	45.99


(6) **Heavy-duty Pipe Wrench.** As (5), but made in Japan.

SIZE, ORDER INFO: *Not Craftsman.*

Catalog Number	Size in.	Cap. in.	Wt. lbs. oz.	Price
9 GT 30856	8	1	1 3	\$4.49
9 GT 30851	10	$1\frac{1}{2}$	1 14	5.99
9 GT 30852	14	2	3 8	7.99
9 GT 30854	18	$2\frac{1}{2}$	5 13	10.49

(7) **CRAFTSMAN Reversing Chain Pipe Wrenches.** Steel handle and chain. Ratcheting-type.

SIZE, CAPACITY, ORDER INFO:
4-in. outside diameter capacity. 12-inch handle, 15-inch chain.
9 GT 55713—Wt. 1 lb. 12 oz. \$7.77
5-in. outside diameter capacity. 16-inch handle, 19 $\frac{1}{2}$ -inch chain.
9 GT 55714—Wt. 3 lbs. 5 oz. \$9.97

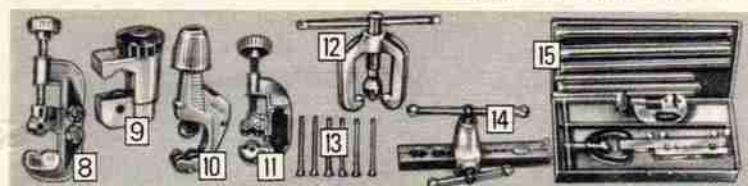

CRAFTSMAN® Flaring Tools... you can cut, bend, join and flare thinwall tubing

(8) **Tubing Cutter for $\frac{1}{4}$ to $1\frac{1}{2}$ -in. outside diameter tubing.** Steel alloy cutting wheel. Zinc frame. Twin reamers and 2 facing, flare-groove rollers. Feed knob.

ORDERING INFORMATION:
Shipping weight 1 lb. 6 oz.
9 GT 5528 \$6.79

(9) **Tubing Cutter for $\frac{1}{4}$ to $\frac{1}{2}$ -in. outside diameter tubing.** Use in small, hard-to-get-at areas where standard cutters cannot work. Needs $1\frac{1}{2}$ -in. clearance. Steel alloy cutting wheel. Zinc frame. Feed knob.

ORDERING INFORMATION:
9 GT 5560—Wt. 6 oz. \$3.49

(10) **Tubing Cutter for $\frac{1}{4}$ to $1\frac{1}{8}$ -in. outside diameter tubing.** Two steel alloy cutting wheels. Zinc frame. Slide-lock retractable safety reamers and 2 facing flare-groove rollers. Feed knob. Enclosed feed design.

ORDERING INFORMATION:
Shipping weight 15 oz.
9 GT 5531 \$6.29

(11) **Tubing Cutter for up to 1-inch outside diameter tubing.** Steel alloy cutting wheel. Zinc frame. Slide-lock reamer and 2 facing rollers. Feed knob.

ORDERING INFORMATION:
Shipping weight 12 oz.
9 GT 5533 \$4.49

(12) **Flaring Tool.** For 7 thinwall tubing sizes: $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$ and $\frac{5}{8}$ -inch outside diameter. Steel yoke has swivel cone and steel slide-bar handle.

ORDERING INFORMATION:
Shipping weight 2 lbs. 4 oz.
9 GT 5537 \$10.97

(13) **6-piece Tube-bending Set.** For thinwall tubing with $\frac{1}{4}$ to $\frac{5}{8}$ -inch outside diameter. Tempered, spring-steel tubes with flared ends. Cadmium-plated to resist rust and corrosion.

ORDERING INFORMATION:
Shipping weight 1 lb. 15 oz.
9 GT 5541 Set \$3.49

(14) **Extra-heavy-duty Flaring Tool.** For 8 thinwall tubing sizes: $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{7}{16}$, $\frac{1}{2}$, $\frac{5}{8}$, $\frac{3}{4}$ -inch outside diameter. Rigid ductile iron frame. Steel die bar and spring-loaded handles. Plunger centers tool.

ORDERING INFORMATION:
9 GT 5548—Wt. 3 lbs. \$26.99

(15) **9-piece Flaring Tool Set.** For copper, aluminum and brass and thinwall tubing. Includes Tubing Cutter (11), Flaring Tool (12), 6-piece Tube-bending Set (13), and plastic storage case.

ORDERING INFORMATION:
9 GT 5527—Wt. 6 lbs. 12 oz. Set \$19.77

Power Drain Cleaner

Shoots a blast of air to clear blockages in pipes from $\frac{1}{2}$ to 2 inches in diameter

\$39.99 without bulbs

You can clear blockages in drains, heating and cooling systems with pipes from $\frac{1}{2}$ to 2 inches in diameter. Can clean entire line up to 250 feet. Works in 30 seconds or less without caustic chemicals or augers. From England.

DISCHARGE GUN: Aluminum construction. Discharges air from carbon dioxide bulb, sold separately below. One bulb can clear one blockage.

DRAIN COVERS: 6 plastic drain covers (1, $1\frac{1}{2}$, 2, $2\frac{1}{2}$, 3, 6-inch sizes).

ORDERING INFORMATION:
9 GT 55471—Wt. 4 lbs. \$39.99

(16) **Carbon dioxide Bulbs.** One bulb clears one blockage. Box of 10.

ORDERING INFORMATION:
9 GT 55473—Wt. 3 lbs. Box \$2.50



Works in 30 seconds or less

Drill-powered Drain Auger

Hooks up to your $\frac{1}{4}$, $\frac{3}{8}$ or $\frac{1}{2}$ -inch drill to bore through most packed deposits in drains or pipes... makes the auger a power tool that can help you finish the job quickly


\$27.99

Attach this drain auger to your own $\frac{1}{4}$, $\frac{3}{8}$, or $\frac{1}{2}$ -inch electric drill. Opens most household clogged drains without chemicals that can damage pipes.

CONSTRUCTION: Drophead, attached to end of coil, is designed to turn as it digs... packed deposits in pipes and drains are bored loose. $\frac{1}{4}$ -inch piano wire coil is 25 feet long. Coil is neatly stored in steel canister... zinc-plated to resist rust and corrosion. Feed coil into drain by loosening collet nut and pulling coil out.

ORDERING INFORMATION: See our complete selection of electric drills on pages 14 and 15.

Shipping weight 8 lbs. 8 oz.
9 GT 55472 \$27.99

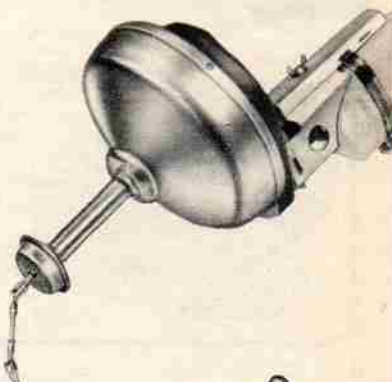

Drain Augers and Sewer Rods help clear blockages in pipes and drains

(17) **Crank-feed Drain Auger with 25-foot wire coil.** **CONSTRUCTION:** $\frac{1}{4}$ -inch wire coil rewinds into rust-resistant steel canister. Tumble head with 2 universal joints... turns sharp corners as it digs through deposits.

ORDERING INFORMATION:
9 GT 55356—Shipping weight 6 pounds 8 ounces \$13.99

(18) **Crank-feed Drain Auger with 15-foot flexible spring steel coil.**

CONSTRUCTION: $\frac{1}{4}$ -inch spring steel coil rewinds into rust-resistant steel canister.

ORDERING INFORMATION:
9 GT 5547—Shipping weight 3 pounds 12 ounces \$7.49

(19) **Flat Sewer Rods.**

CONSTRUCTION: Cadmium-plated spring steel coil. Revolving spear point. Handle grips rod at any point. Steel frame for storage.

SIZES, ORDERING INFORMATION:

Catalog Number	Length	Width	Thickness	Shpg. wt.	Price
9 GT 5508C	50 ft.	$\frac{1}{2}$ -in.	$\frac{1}{8}$ -in.	8 lbs.	\$12.49
9 GT 55381C	75 ft.	$\frac{3}{4}$ -in.	$\frac{1}{8}$ -in.	12 lbs.	23.99
9 GT 55081C	75 ft.	$\frac{1}{2}$ -in.	$\frac{1}{8}$ -in.	21 lbs.	39.99
9 GT 5540C	100 ft.	$\frac{1}{2}$ -in.	$\frac{1}{8}$ -in.	16 lbs.	29.99
9 GT 55082C	100 ft.	$\frac{3}{4}$ -in.	$\frac{1}{8}$ -in.	38 lbs.	59.99
9 GT 55083C	150 ft.	$\frac{3}{4}$ -in.	$\frac{1}{8}$ -in.	53 lbs.	79.99

(20) **Drain and Trap Auger.**

CONSTRUCTION: $\frac{3}{8}$ -inch spring steel coil. Auger handle grips spring at any point. 50 feet long.

ORDERING INFORMATION:
9 GT 55345—Shipping weight 12 pounds 2 ounces \$12.99





Rugged CRAFTSMAN® Tool Boxes are built to last

To demonstrate this, we put a 1974 Volkswagen Beetle on top of our 9 GT 6512 Box. The dramatic results: not a dent or scratch on the box! That's over 1900 lbs. of direct pressure without a single trace of damage

Fine quality construction goes into all our CRAFTSMAN® Tool Boxes. You can imagine the heavy loads and rough treatment they can withstand, so your own CRAFTSMAN® Tool Box should last you a long, long time



\$29.75

(1 thru 3) Mechanics' Flat-top Tool Boxes



\$15.89



\$10.89



\$26.75

(1) Our best tool box... with partitioned tote tray; takes tools up to 23 inches long
SIZE: 24 1/4 x 9 1/2 x 9 1/2 in. high. Tray measures 23 1/2 x 8 3/4 x 2 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel with red baked enamel finish. Plastic-coated steel top handle, steel side handles. Full-length hinge; three drawbolt latches... center one with lock and two keys.
ORDERING INFORMATION:
Shipping weight 23 pounds.
9 GT 65141C.....\$29.75

(2) With partitioned tote tray; takes tools up to 19 inches long
SIZE: 20x8 1/2 x 9 1/2 in. high. Tray 19 3/4 x 7 3/4 x 2 in. deep.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Polyethylene handle. Full-length hinge. Two drawbolt latches, welded center hasp with padlock eye.
ORDERING INFORMATION:
9 GT 6512—Shipping weight 12 pounds...\$15.89
As above except takes tools up to 17 in. long
18x8x9 in. high. Tray 17 1/2 x 6 3/4 x 1 1/4 in. deep.
ORDERING INFORMATION:
9 GT 6500—Shipping weight 10 lbs. 10 oz...\$12.95

(3) With non-partitioned tote tray; takes tools up to 16 inches long
SIZE: Overall 17x7x7 1/2 in. high. Tray 16 1/4 x 6 1/2 x 1 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Polyethylene handle. Full-length hinge. Combination drawbolt latch with padlock eye.
ORDER INFO: Wt. 7 lbs. 7 oz.
9 GT 65013.....\$10.89

(4) Carpenters' Box, designed for long tools. Up to 29 in.; partitioned lift-out tray
SIZE: 30x8 1/2 x 9 in. high. Tray 29 1/4 x 5 1/4 in. deep. Knock-out plug for square, bracket for std. level, wood saw clip for 2 hand saws.
CONSTR.: Heavy-gauge steel, gray baked enamel. Plastic-coated steel top handle, steel side handles. Full-length hinge. Three drawbolt latches... center one locks; 2 keys.
ORDERING INFO: Saw not incl.
9 GT 6517C—Wt. 17 lbs...\$26.75



\$31.75

5

(5 and 6) Cantilever Tool Boxes

(5) Double-cover with 4 cantilever trays; takes tools up to 17 inches long
SIZE: Overall 18x10x13 1/4 in. high. Four trays, each 16 1/2 x 4 1/2 x 1 1/2 in. deep.
CONSTRUCTION: Hip-roof design. Heavy-gauge steel, gray baked enamel finish. Two trays partitioned, two with covers. Plastic-coated steel handle. Full-length hinges. Reinforcing skids on box bottom. Two drawbolt latches, padlock eye.
ORDERING INFORMATION:
9 GT 6536C—Shpg. wt. 24 lbs.....\$31.75

(6) Single-cover with 4 cantilever trays; takes tools up to 16 inches long
SIZE: Overall 16 1/2 x 8 3/4 x 10 1/4 in. high. Four trays, each 15 1/2 x 3 3/4 x 1 1/4 in. deep.
CONSTR.: Hip-roof design. Heavy-gauge steel, gray baked enamel finish. Two trays partitioned. Polyethylene handle. Full-length hinge. Combination drawbolt, padlock eye.
ORDERING INFORMATION:
9 GT 65351—Shpg. wt. 12 lbs.....\$22.75



\$22.75

6

(7) Hip-roof Tool Box

With partitioned tote tray; takes tools up to 19 inches long
SIZE: Overall measures 19 1/4 x 7 x 8 inches high. Tray 19x6 1/2 x 2 1/4 inches deep.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Polyethylene handle. Full-length hinge. Two drawbolts, padlock eye.
ORDERING INFORMATION:
9 GT 6520—Shpg. wt. 9 lbs.....\$13.95
Compact Hip-roof Box... as above except 19 1/4 x 6 x 6 in. high. Tray 19x5 3/4 x 1 1/4 in. deep. Combination drawbolt, padlock eye.
9 GT 65161—Shpg. wt. 8 lbs.....\$9.89



\$13.95

8

(8) Box for 3/4-in. Drive Tools

Takes tools up to 20 inches long
SIZE: 21 1/2 x 6 1/2 x 3 3/4 in. high.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Nickel-plated steel front handle. Full-length hinge. Two drawbolt latches.
ORDERING INFORMATION:
9 GT 6506—Shpg. wt. 6 lbs. 12 oz.....\$10.99



\$10.99



NEW AT SEARS!

The largest Tool Box we've ever offered... Heavy-duty Maintenance Equipment Box with over 4 cu.-ft. of storage space
\$89.99

With partitioned tote tray... box takes tools, equipment up to 39 inches long
SIZE: 40 1/2 x 16 1/2 x 12 1/2 inches high. Tray measures 23 3/4 x 8 3/4 x 2 1/4 inches deep.
CONSTRUCTION: Heavy-gauge steel, gray baked enamel finish. Heavy-duty bolted steel side handles; 3 butt hinges. Steel chain stops. Padlock hasp, eye.
ORDERING INFO: See "N" suffix on page 92.
9 GT 65242N—Shipping weight 63 pounds \$89.99
34 [Sears] COMPBK LAEGJD

CRAFTSMAN® Tool Chests

Reinforced bottom and sides handle big loads without sagging, loosening



(9 and 10) Mechanics' Chests

(9) Our best portable chest... with two drawers, partitioned tote tray
SIZE: 20x8 1/2 x 9 1/2 in. deep. Two drawers, each: 7 1/4 in. front to back, 18 1/2 in. wide, 2 in. deep. Tote tray 18 1/2 x 7 1/4 x 1 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel, gray with red baked enamel finish. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. Two drawbolt latches, tumbler lock, 2 keys.
ORDERING INFO: Wt. 19 lbs.
9 GT 65336C.....\$34.75



(10) With two drawers
SIZE: 20x8 1/2 x 9 1/2 in. deep. Two drawers, each: 7 1/4 in. front to back, 18 1/2 in. wide, 2 in. deep. Top compartment 2 1/2 in. deep.
CONSTRUCTION: Heavy-gauge steel with gray baked enamel finish. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. Two drawbolt latches and padlock hasp.
ORDERING INFO: Wt. 18 lbs.
9 GT 65334C.....\$24.95



(11) Competition Chest

With 2 drawers, cantilever tray
SIZE: 20 1/2 x 8 1/2 x 10 1/2 in. high. Two drawers, each: 7 1/2 in. front to back, 18 1/4 in. wide, 2 1/4 in. deep. Top compartment 3 1/4 in. deep... cantilever tray 19 1/2 x 3 3/4 x 1 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel. Baked black wrinkle finish with red tray. Wood-grained vinyl on drawers, top. Polyethylene handle. Full-length hinge. Drawers lock when lid is closed. Two drawbolt latches, tumbler lock with 2 keys.
ORDERING INFORMATION:
9 GT 6530C—Wt. 19 lbs...\$32.75

PLAY IT SAFE! Job Safety Equipment for home, shop, industry



Hearing Protectors

For moderate noise levels **\$790** | For high noise levels **\$990**

Helps protect against harmful effects of noise. Foam ear cushions; when worn, follow contour of head for secure noise seal, comfortable fit. Plastic cups. Vinyl-covered metal headband; adjusts to fit over most headgear... can also be worn behind head, under chin. USES, ORDERING INFORMATION:

For moderate noise levels... up to 110 decibels (shown in small view). For home workshop and light industry. Shipping weight 13 oz. 9 GT 1869... \$7.90

For high noise levels... over 110 decibels (shown on model). For heavy industry and manufacturing. Shipping weight 1 pound. 9 GT 1863... \$9.90



Respirators

(1) **Paint Spray Respirator.** Helps protect you from vapors of latex base paint, laquers, epoxies. Adjustable rubber headband; with replaceable filter-cartridge. *Not for use with ammonia.*

ORDERING INFORMATION:
9 GT 18573—Wt. 1 lb. 2 oz. \$13.70

Extra filter-cartridges for (1). Pkg. of 2. Shipping weight 8 ounces.
9 GT 18574... Pkg. \$4.40

(2) **Organic Vapor Respirator.** Helps filter out solvent vapors in painting, degreasing, cleaning jobs. Pliable rubber; with replaceable filter. *Not a gas mask.*

ORDERING INFORMATION:
9 GT 18711—Shpg. wt. 1 pound... \$8.40

Extra cartridge with 5 filters for (2).
9 GT 18763—Shpg. wt. 7 oz. \$1.90

Dust and Mist Respirator. As above, except filters out most dusts including pollen, grain, cotton and wood.

ORDERING INFORMATION:
9 GT 1852—Shpg. wt. 10 oz. \$7.79

Extra filters for (9 GT 1852). Pkg. of 5.
9 GT 18525—Shpg. wt. 3 oz. Pkg. \$1.33

(3) **Dust Respirator.** Helps protect you from dusts of cement, sawdust, charcoal, pollens. Soft rubber face-piece, headband; washable and reusable filter.

ORDERING INFORMATION:
9 GT 1872—Shpg. wt. 5 oz. \$4.90

Eye and Face Protectors

(4) **Industrial Impact Goggles.** Heat-treated safety-glass lenses. Aluminum side shields. Adjustable bridge and headband.

ORDERING INFORMATION:
9 GT 1860—Shpg. wt. 7 oz. \$4.40

As above except fit over personal glasses.
9 GT 18615—Shpg. wt. 9 oz. \$5.40

(5) **Safety Glasses.** Heat-treated safety-glass lenses. Plastic frame, mesh side shields.

ORDERING INFORMATION:
9 GT 1855—Shpg. wt. 5 oz. \$5.94

As above except without side shields.
9 GT 1854—Shpg. wt. 5 oz. \$6.79

(6) **Flexible Mask Impact Goggles.** Plastic lenses, body. Perforated side shields for direct ventilation. Elastic strap adjusts; fit over personal glasses.

ORDERING INFORMATION:
9 GT 1859—Shpg. wt. 7 oz. \$1.89

Dust and Chemical Goggles. As above except sides with indirect ventilation valves.

9 GT 18593—Shpg. wt. 6 oz. \$2.89

Extra lens for (9 GT 1859, 9 GT 18593).
9 GT 18591—Shpg. wt. 3 oz. \$1.15

(7) **CRAFTSMAN Face Shield.** Polycarbonate window 8x11½ in. Head gear adjusts.

ORDERING INFORMATION:
9 GT 18613—Shpg. wt. 1 lb. 1 oz. \$5.79

Replacement window for (7).
9 GT 18614—Shpg. wt. 5 oz. \$2.40

NEW AT SEARS! Emergency Medical Care Carts, Cassette Case



Medical Carts and Cassette help keep necessary drugs, supplies and instruments safely at hand in industries, institutions... help trained medical personnel act quickly and efficiently in emergencies

(8 and 9) Maxi and Mini Medical Care Carts.

CONSTRUCTION: Cold-rolled steel, welded seams. Baked enamel finish. Wrap-around bumper; 5-in. swivel casters with brakes, grounding bolts. Panel pulls out to cover compartment, lock drawers. Push handle. Plastic top; ½-in. side guards. Plastic drawer dividers cut to size desired, with adhesive bottoms. *Drugs, equipment pictured are not included.*

(8) **Maxi Medical Cart**... 26¾x18½x41½ in. high. Five drawers, each 22½x16¾ in. wide... four are 3 in. deep, one 6¾ in. deep. Lower compartment 26½x17¼x13¾ in. high. Collapsible side shelf; railing; IV pole, clamp; utility hooks; oxygen tank brackets; cardiac board, brackets; 6 partitioned trays.

ORDER INFO: Sent partly assembled. Prepaid to all states except Alaska and Hawaii. See important shipping note below.
F9 GT 65045N2—(Shpg. wt. 170 lbs.)... \$385.75

(9) **Mini Medical Cart**... 26¾x18½x34¾ in. high. Three drawers, each 22½x16¾ in. wide... two are 3 in. deep, one 6¾ in. deep. Lower compartment 26½x17¼x13¾ in. high.

ORDER INFO: Sent partly assembled. Prepaid to all states except Alaska and Hawaii. See important shipping note below.
F9 GT 65047N—(Shpg. wt. 104 lbs.)... \$227.54

(10) **Medical Care Cassette.** For controlled, organized storage of vials, injectable, small supplies. Welded steel body 21½x9¾x13 in. high; 16 plastic bins, each 4½x9x2¼ in. deep. Four removable steel trays hold bins. Plastic top handle. Tumbler lock, key.

ORDERING INFORMATION: Prepaid to all states except Alaska and Hawaii. See important shipping note below.
F9 GT 65048C2—(Shpg. wt. 25 lbs.)... \$107.58

SHIPPING NOTE: F items (such as F9 GT 65045N2) sent from factory in Waterloo, Iowa. Allow extra time. Sorry, no C.O.D. orders.

Welders' Helmets, Goggles

(11) **Industrial Welders' Helmet.** Ratchet-type head adjustment. Slide-in, lift-front plate holder. With cover lens, No. 10 filter.

ORDERING INFORMATION:
9 GT 1325—Shpg. wt. 2 lbs. 10 oz. \$12.95

(12) **Homeshop Welders' Helmet.** With cover glass, lens holder, No. 10 filter.

ORDERING INFORMATION:
9 GT 1320—Shpg. wt. 2 lbs. 1 oz. \$6.49

No. 10 Replacement Filter Plate for (11, 12). Up to ½-in. electrodes.


ORDERING INFORMATION:
9 GT 13277—Shpg. wt. 4 oz. \$1.95

(13) **Welders' Goggles.** Polyethylene, adjustable headband. Fits over spectacles. No. 5 filter, 2x4¼-in. window.

ORDERING INFORMATION:
9 GT 18636—Shpg. wt. 9 oz. \$6.90


No. 5 Replacement Filter Plate for (13). To cut steel to 6 in., weld steel to ½-in.

ORDERING INFORMATION:
9 GT 13275—Shpg. wt. 4 oz. \$1.95

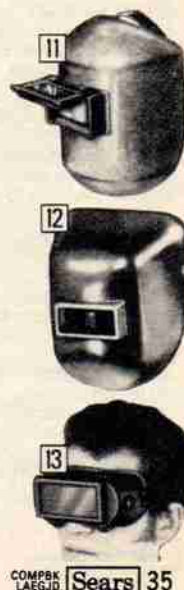

NEW AT SEARS! Germicon® Cabinet stores, helps keep safety glasses, goggles, headsets sanitary

Cabinet alone **\$159.00**

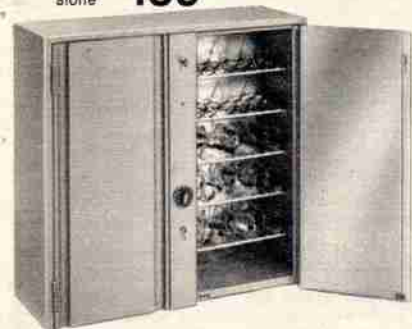

CONSTRUCTION: Enamel-finished steel cabinet, 30x30x12 in. deep. Double doors with key lock. Five removable shelves with 40 compartments. Germicidal lamp with 15-min. timer, pilot lamp. Reflective aluminum surface for complete irradiation of cabinet.

CAPACITY: Any number of 40 glasses, goggles or 20 headsets.

ELECTRICAL INFO: 110-120-volt AC. UL listed. 8-foot, 3-wire cord.

ORDER INFO: From Chicago, Phila., Atl., Dallas or L.A. Allow time. Pay shpg., handling from Dist. Ctr. See "N" note p. 92.

Germicon® Cabinet alone.
T9 GT 18601N—Wt. 53 lbs. \$159.00

Cabinet with 40 Dust and Chemical Goggles (9 GT 18593) above.
T9 GT 18603N—Wt. 53 lbs. \$249.00

Cabinet with 30 Safety Glasses (9 GT 1855) and 10 Impact Goggles (9 GT 1859) above.

T9 GT 18602N—Wt. 53 lbs. \$328.50

Cabinet with 40 Goggles **\$249.00** | Cabinet, 30 Glasses, 10 Goggles **\$328.50**

Big load or small, one of these Material Handling Trucks can suit your needs.. capacities from 300 to 4500 pounds



300-lb. capacity **\$28⁹⁰**

400-lb. capacity **\$44⁹⁵**

500-lb. capacity **\$189⁹⁵**

500-lb. capacity **\$79⁹⁵**

500-lb. capacity **\$38⁹⁵**

600-lb. capacity **\$98⁹⁵**

800-lb. capacity **\$99⁹⁵**

(1) 300-lb. capacity.

SIZE: Stands 46½ inches high, 14 inches wide. Nose 8 inches deep.

CONSTR.: Tubular steel frame. Stair riser slides. Enamel finish.

WHEELS: 8x1.75-in. Ball bearings.

ORDER INFO: See "N" suffix, p. 92.
9 GT 87216N—Wt. 26 lbs. . . \$28.90

(2) 400-lb. capacity with convertible handle.

Use as upright truck or convert to 4-wheel cart for easier handling of bulky loads. . . just reposition handle horizontally.

SIZE: Stands 44 inches high, 14 inches wide. Nose 8 inches deep.

CONSTRUCTION: Tubular steel frame. Stair riser slides. Wheel guards. Enamel finish.

WHEELS: Heavy-duty 3-in. swivel casters on handle. Two 8x1.75-inch rubber tires at base.

ORDER INFO: See "N" suffix, p. 92.
9 GT 87223N—Wt. 35 lbs. . . \$44.95

(3) Universal Appliance Truck . . 500-lb. capacity.

Ideal for handling refrigerators, deep freeze units, water heaters, gas cylinders.

SIZE: Stands 60 inches high, 16 inches wide. Nose 24 in. wide, 5 in. deep.

CONSTRUCTION: Tubular steel frame. Extruded rubber bumper on front plus felt-padded curved crossbars for total load protection. Adjustable 5-in. by 14-feet web strap cross bar. Nylon-covered rubber belt-glides revolve around rollers. . . help protect stairs.

WHEELS: 6x2-inch rubber tires.

ORDER INFORMATION: See "N" suffix, p. 92.
Shpg. wt. 48 lbs.
F9 GT 87241N—\$189.95

(4) 500-lb. capacity. Aluminum alloy construction means it's strong plus lightweight.

SIZE: Stands 50 inches high, 12 inches wide. Nose 14 in. wide, 7 in. deep.

CONSTRUCTION: Extruded, heat-treated aluminum alloy box frame with high-tensile aluminum alloy nose. . . bolted for extra strength.

WHEELS: 8x1½-inch rubber tires.

ORDERING INFORMATION: See "N" suffix, page 92.
F9 GT 87239N—Wt. 21 lbs. . . \$79.95

(5) 500-lb. capacity.

SIZE: Stands 51 inches high, 13½ inches wide. Nose 9 inches deep.

CONSTRUCTION: Tubular steel frame. Vertical handle with curved bar helps improve leverage. Stair raiser slides. Wheel guards. Enamel finish.

WHEELS: 10x2.75-in. rubber tires.

ORDERING INFORMATION: See "N" suffix, page 92.
9 GT 87292N—Wt. 37 lbs. . . \$38.95

(6) 600-lb. capacity with shovel nose.

SIZE: Stands 50 in. high, 18¼ in. wide. Nose 13¼ in. deep. . . tapers from 14¼ in. wide at rear to 12 in. wide at front.

CONSTR: Heavy-duty pipe frame. Flared top, foot bar. Curved crossbars permit handling cylinders. Wheel guards. Enamel finish.

WHEELS: 6x2-inch rubber tires.

ORDERING INFO: See "N" suffix, p. 92.
F9 GT 87238N—Shpg. wt. 52 lbs. . . \$98.95

(7) 800-lb. capacity . . our most rugged upright hand truck.

SIZE: Stands 52 inches high, 22 inches wide. Nose 6½ inches deep.

CONSTRUCTION: Steel strapped hardwood frame. Straight crossbars. Wheel guards.

WHEELS: 8x2-inch rubber tires.

ORDER INFO: See Shipping Note below, left.
F9 GT 87212N—Shpg. wt. 60 lbs. . . \$99.95

Truck Similar to (7) above except with curved crossbars for barrels, cylinders.

ORDER INFO: See Shipping Note below, left.
F9 GT 87213N—Shpg. wt. 60 lbs. . . \$99.95



Handy Steel Shelf Truck . . with capacity up to 800 lbs. **\$139⁹⁵**



Hardwood Platform Truck . . choose for loads up to 1500 or 2000 lbs. **\$119⁹⁵**
1500-lb. capacity (24x48 in.)



Steel Platform Truck . . choose for loads up to 1500 or 2000 lbs. **\$139⁹⁵**
1500-lb. capacity



Rugged Pallet Truck with hydraulic lift . . handles loads up to 4500 lbs. **\$399⁰⁰**

Wheel Brake for Pallet Truck (11) **\$65⁰⁰**

(8) Steel Shelf Truck . . 800-lb. capacity. Ideal for toolrooms, warehouses, stockrooms, plants. Provides convenient storage and transport of small parts and packages.

SIZE: Overall stands 36 inches high, 21 inches wide, 30 inches long. Two shelves, each measure 21x30 inches long; 16-inch clearance between shelves.

CONSTRUCTION: Angle steel frame, shelves welded into one solid unit. Shelf edges turned up 1½ in. on three sides. Push handle. Enamel finish.

WHEELS: Two 8x1½-in. main wheels with molded-on rubber on aluminum centers; two 50x1½-in. swivel casters with demountable rubber on steel centers.

ORDERING INFORMATION: Be sure to see Shipping Note below.

Shipping weight 95 pounds.
F9 GT 87237N . . . \$139.95

(9) Hardwood Platform Truck . . 1500 or 2000-lb. capacity.

CONSTRUCTION: Lengthwise 1-inch thick hardwood. . . kiln-dried to prevent warping. Sanded, then natural varnished. Reinforced beneath with hardwood crossboards. Tubular steel handle; enamel finish.

WHEELS: Bolted through hardwood crossboards and deck. 1500-lb. trucks with 6x2-in. wheels, 9¼-in. deck height; 2000-lb. trucks with 8x2-in. wheels, 11¼-in. deck height.

CAPACITIES, SIZES, ORDERING INFORMATION: See Shipping Note left.

Catalog No.	Capacity	Width	Length	Shpg. wt.	Price
F9 GT 87231N	1500 lbs.	24 in.	48 in.	85 lbs.	\$119.95
F9 GT 87232N	1500 lbs.	30 in.	60 in.	120 lbs.	134.95
F9 GT 87233N	2000 lbs.	24 in.	48 in.	115 lbs.	134.95
F9 GT 87234N	2000 lbs.	30 in.	60 in.	150 lbs.	149.95

(10) Steel Platform Truck . . 1500 or 2000-lb. capacity. Measures 24x48 in. long.

CONSTRUCTION: Decks of one-piece steel with "C" channel formed all around for extra strength. All-welded construction. Tubular steel handle. Enamel finish.

WHEELS: 1500-lb. with 6x2-in. wheels, 9¼-in. deck height; 2000-lb. with 8x2-in. wheels, 11¼-in. deck height.

CAPACITIES, ORDER INFO: See Shipping Note left.

F9 GT 87235N—1500-lb. capacity. Wt. 95 lbs. . . \$139.95
F9 GT 87236N—2000-lb. capacity. Wt. 115 lbs. . . 144.95

(11) Heavy-duty Pallet Truck with hydraulic lift . . 4500-lb. capacity.

CONSTRUCTION: 1-pc. all-steel hydraulic unit with overload valve to prevent exceeding capacity. Full 200° turning radius for maneuvering ease. Three-position foot pedal jacks up, locks and lowers loads.

WHEELS: 8x2-inch double base wheels; 3¼x4-inch fork load rollers. Polyurethane.

SIZES, ORDER INFO: See Shpg. Note left.


Catalog Number	Fork Length	Truck Width	Wt. lbs.	Price
F9 GT 87256N	32 in.	27 in.	283	\$399.00
F9 GT 87251N	36 in.	17¼ in.	241	399.00
F9 GT 87254N	36 in.	20½ in.	265	399.00
F9 GT 87257N	36 in.	27 in.	290	399.00
F9 GT 87252N	42 in.	17¼ in.	248	399.00
F9 GT 87205N	42 in.	20½ in.	272	399.00
F9 GT 87258N	42 in.	27 in.	297	399.00
F9 GT 87253N	48 in.	17¼ in.	256	399.00
F9 GT 87255N	48 in.	20½ in.	280	399.00
F9 GT 87206N	48 in.	27 in.	304	399.00

(12) Wheel Brake for (11) above. Steel. Stops loads by placing handle in down position. Includes installation hardware.

ORDER INFO: See Shipping Note left.
F9 GT 87207N—Shpg. wt. 9 lbs. . . \$65.00

Rugged Steel Storage Units

- Provide the space...room for small parts or large awkward items
- Let you organize...labeled drawers or open bins, find it with a glance
- Provides efficiency...gain valuable floor space, spend less time looking for items



Heavy-duty Storage Bins use 3 sq. ft. of floor space...give you 21 cu. ft. of storage space

Drawers remove, each has 2 adjustable dividers



Sides welded to 1-pc. front, bottom, back



Bench-top 18 drawer unit

\$84⁹⁵

(1 thru 4) Shelf-type Units

Dividers are adjustable at 1-inch increments...great for odd sized objects

\$110⁰⁰

(5) Drawer-type Units

108 drawers...2 adjustable dividers in each give you 324 compartments

\$495⁰⁰

(1 thru 5) Designed for heavy-duty application in garages, workshops, factories and warehouses. Self-standing, large enough to section off areas.

CONSTRUCTION: Four high-carbon steel angle uprights support heavy loads and maintain stability. Solid steel back adds support to entire unit...keeps unit square when heavy objects are stored. Gray enamel protective finish resists chipping and corrosion. Overall: 7 ft. 1 1/4 in. high, 3 ft. wide, 1 ft. deep.

(1 thru 4) Shelf-type Bins

STORAGE FACILITIES: Steel shelves fastened at 10 stress points for support. Vertical steel dividers adjust along shelves in 1-in. intervals.

CAPACITY, ORDER INFO: Sent unassembled. See Shpg. note below.

(1) 21-bin. 3—12x10 1/2, 18—12x12 in. F9 GT 10206N—Wt. 115 lbs. ...\$110.00

(2) 66-bin. 6—6x5 1/2, 60—6x6 in. F9 GT 10208N—Wt. 168 lbs. ...\$169.00

(3) 84-bin. 6—6x4 1/2, 78—6x6 in. F9 GT 10205N—Wt. 191 lbs. ...\$194.00

(4) 108-bin. 6—6x6, 102—6x4 1/2 in. F9 GT 10207N—Wt. 215 lbs. ...\$225.00

(5) Drawer-type Storage Bins

STORAGE FACILITIES: 108 steel drawers each measure 3 1/4 in. high, 5 5/8 in. wide and 11 in. deep...glide smoothly on 2 runners. Each drawer includes 2 dividers to provide 324 separate compartments (extra dividers sold separately below). Corrugated grooves in drawers lets you space dividers as close as 1-in. apart. Drawer front and dividers hold identification labels (not included).

ORDERING INFORMATION: Shipped unassembled. See Shipping Note below.

Shipping weight 212 lbs. F9 GT 10204N...\$495.00

(6) Bench-top, Drawer-type Storage Bin. Stackable drawer modules are ideal for use on top or under workbenches, desks, tables.

CONSTRUCTION: All steel cabinet includes back for fully surrounded drawers. Gray enamel finish resists chipping, corrosion. Unit measures 34 1/4 in. wide and 13 1/2 inches high. Available with 11 or 17-in. deep drawers.

STORAGE FACILITIES: 18 steel drawers each 3 1/4 in. high, 5 5/8 in. wide. Two dividers included with each drawer to provide 54 separate storage compartments (extra dividers sold below). Space dividers as close as 1-in. apart. Each drawer front and all dividers hold identification labels (not included).

SIZE AND ORDERING INFORMATION: See Shipping Note below.

12-inch deep Drawer Unit
Shipping weight 64 pounds.
F9 GT 10201N—Wt. 64 lbs. ...\$73.95

18-inch deep Drawer Unit
Shipping weight 84 pounds.
F9 GT 10202N...\$84.95

Extra Dividers for (5 and 6). Scoop-type design. Steel.
F9 GT 10203—Shipping weight 4 ounces...Each 19c

New at Sears! Galvanized Steel Angles

Custom design and build your own storage racks to suit your needs...just cut, bolt angles together

Here's all you do...



Design and line sketch storage unit to suit your needs and write in dimensions.



Cut pieces to size with hacksaw or use cutter available below...bolt together to your specs.



Load it up...custom designed and built especially to fill your particular storage needs.

Low as **\$65⁹⁰** Bundle of 10 14 ga., 10-ft. long

(7 and 8) Steel angles that let you custom build the type of storage unit you need for those awkward, large items...ideal for odd size lumber, long pipes, posts, building materials in the home, shop, factory or garage. Build the storage unit to fit the item being stored.

CONSTRUCTION: Hot dipped galvanized steel angles resist rust and corrosion. Hole arrangement on angles lets you bolt them together any number of ways where two or more angles meet. When storing heavy objects or for added strength use in double or triple thickness. Assemble for free standing unit or bolt to walls for a hanging storage unit. Includes 10 angles, assembly instructions, 75 bolts and nuts.

SIZES AND ORDERING INFORMATION: See Shpg. Note below.

(7) Standard-duty Angles. 14 gauge steel, 1 1/2x2 1/4 inches.
F9 GT 10213N—10 ft. long. Shpg. wt. 87 lbs.10 per bundle \$65.90
F9 GT 10214N—12 ft. long. Shpg. wt. 104 lbs.10 per bundle 77.30

(8) Heavy-Duty Angles. 12 gauge steel, 1 1/2x3 inches.
F9 GT 10215N—10 ft. long. Shpg. wt. 138 lbs.10 per bundle \$93.50
F9 GT 10216N—12 ft. long. Shpg. wt. 166 lbs.10 per bundle 112.00

SHIPPING NOTE: "F" items (as F9 GT 10203) from Aurora, Ill. factory. Pay shipping, handling from your Distribution Center. "F" items with "N" suffix (as F9 GT 10206N) pay motor carrier charges from factory. Allow time. No C.O.D.'s.

(9) One stroke Angle Cutter

Use to cut angles sold above. Insert angle into cutter, push down...cuts in a single stroke. For straight cuts only.

ORDERING INFORMATION:
9 GT 10209C—Shipping weight 18 lbs.\$67.50




COMPK SLAEGD Sears 37

Material Handling Aids let you move it, lift it, pull it

• Capacities from 500 pounds to 20 tons for the power you need

• Electric, hydraulic or manually operated equipment gets the job done with the ease in handling you want

CRANES, HYDRAULIC OR WINCH OPERATED

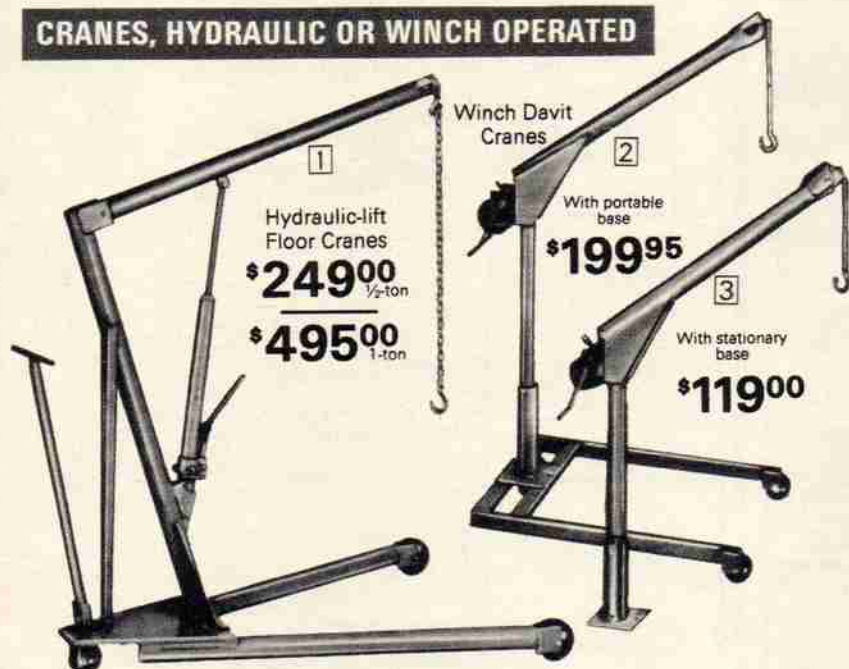

Hydraulic-lift
Floor Cranes
\$249⁰⁰ 1/2-ton
\$495⁰⁰ 1-ton

Winch Davit
Cranes
With portable
base
\$199⁹⁵
With stationary
base
\$119⁰⁰

(1) **Hydraulic-lift Floor Cranes.** Hydro-slope mast lets hydraulic unit push straight up... so efficient, one man can transport load. Handle-operated steering wheel turns 360°.

CONSTRUCTION: Tubular steel with torsion tube bracing.
SPECIFICATIONS:

Size	1/2-ton	1-ton
Boom length	45 1/2 inches	54 inches
Mast height	54 1/2 inches	67 inches
Vertical boom travel	26 1/2 to 82 in.	38 to 91 inches
Overall base width	38 1/4 inches	49 inches
Overall base length	56 3/4 inches	70 inches
Base height	5 inches	6 inches

CAPACITY, ORDERING INFORMATION: See Shpg. Note below.
F9 GT 7803N—1/2-ton. Shipping weight 226 pounds... **\$249.00**
F9 GT 7804N—1-ton. Shipping weight 400 pounds... **495.00**

(2 and 3) **Winch Davit Cranes.**

CONSTRUCTION: Tubular steel. Ratchet-type winch locks cable automatically. Includes 16 ft. of 3/16-in. cable, hook.

SPECIFICATIONS:

Size	(2) Portable	(3) Stationary
Boom length	34 inches	34 inches
Mast height	46 inches	50 inches
Vertical lift (maximum)	62 inches	67 inches
Overall base width	32 inches	8 inches
Overall base length	42 inches	8 inches
Base height	4-in. front, 2 1/2-in. rear	
Lifting Capacity	500 pounds	500 pounds

STYLE, ORDERING INFORMATION: See Shpg. Note below.

(2) **With portable base.** Front and rear casters, rear turns 360°. F9 GT 78021N—Shipping weight 129 pounds... **\$199.95**

(3) **With stationary base.** Mount in truck or on dock for loading, unloading. Boom turns 360°. Predrilled mounting plate. F9 GT 7802N—Shipping weight 75 pounds... **\$119.00**

(4) **Power Pulls.** Use as hoist or winch.

CONST: Frame and heat-treated handle of cold rolled steel. Laminated and heat-treated steel ratchet pawl. Cadmium-plated steel parts resist rust. Large ratchet cover. Automatic let-down safety catch. Steel cable. Drop-forged steel hooks.

CAPACITIES, ORDERING INFORMATION:

1/2-ton capacity, 10:1 leverage ratio, 14-ft. max. lift, 5/8-in. cable.
9 GT 7874C—Shipping weight 6 pounds... **\$24.50**
1-ton capacity, 15:1 leverage ratio, 12-ft. max. lift, 3/4-in. cable.
9 GT 7877C—Shipping weight 8 pounds... **\$33.90**
2-ton capacity, 30:1 leverage ratio, 6-ft. max. lift, 3/4-in. cable.
9 GT 7878C—Shipping weight 9 pounds... **\$41.90**

(5) **Motor Sling.** Steel chain with 2350-lb. capacity.

9 GT 7830—Shipping weight 2 lbs. 13 oz... **\$9.90**

(6) **Wire Gripper.** For smooth or barbed wire.

9 GT 7831—Shipping weight 1 pound... **\$5.29**


PORTABLE POWER PULLS

CRAFTSMAN® 1/2, 1 and 2-ton Power Pulls... lift engines, pull out fenders, stretch cable and fencing

\$419⁰⁰ 2-ton



HANGING STEEL CONVEYOR

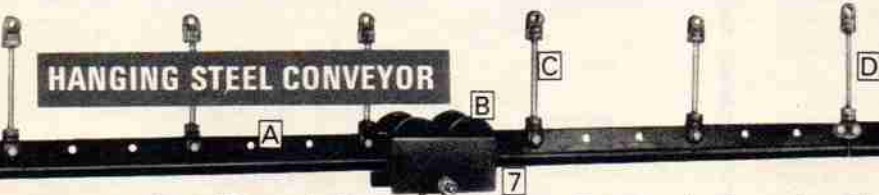

(7) **Conveyor Outfit.** Hang track wherever heavy, bulky loads need to be transported... ideal for handling jobs in garages, repair shops or farms.

CONSTRUCTION: All steel construction.

CAPACITY: Transports loads up to 1 ton.

COMPONENTS: Includes 8 feet of straight track (A); four wheel trolley (B); 7 single hangers (C), each with 6-in. threaded rod, 3 nuts and track bolt; 2 end stops, installation instructions.

ORDERING INFORMATION: See Shipping Note below.

F9 GT 7863N—Shipping wt. 54 lbs... **\$79.95**

(A) **Straight 8-Foot Track.** One splice hanger included for joining with track above.

ORDER INFO: See Shpg. Note below.

F9 GT 78651N—Shpg. wt. 39 lbs... **\$34.95**

90° Curved track (not shown). Includes splice hanger to attach to adjoining track. 4 foot radius, 7 feet long.

ORDERING INFO: See Shpg. Note below.

F9 GT 78652N—Shpg. wt. 31 lbs... **\$49.95**

(B) **Trolley.** Runs on tracks above or 3 to 4 1/2-in. "I" beams. Four flanged cast wheels. Steel sides plated. Hanger pin.

ORDERING INFO: See Shpg. Note below.

F9 GT 7864—Shipping weight 10 lbs... **\$29.95**

(C) **Single Hanger.** For tracks above. 6-inch threaded rod, three nuts, track bolt. Space hangers 16-inches apart for one-ton loads, 20-inches apart for 1/2-ton loads.

ORDERING INFO: See Shpg. Note below.

F9 GT 78661—Shipping weight 8 oz... **\$3.49**

(D) **Splice Hanger.** For joining track ends. 6-in. threaded rod, nuts, track bolts.

ORDERING INFO: See Shpg. Note below.

F9 GT 78662—Shipping weight 8 oz... **\$4.49**

Strap Bracket (not shown). For 2x6, larger hangers.

F9 GT 78663—Shipping weight 1 lb... **\$3.95**

Side Bracket (not shown). Holds hanger to beams.

F9 GT 78664—Shipping weight 1 lb... **\$1.99**

SCREW JACKS

CONSTRUCTION: Corrugated top for extra gripping strength. Drop-forged screw. Ten-ton jack with 1 1/4x8-in. screw; 20-ton jack with 2x12-in. screw. Strong semi-steel bottom rests evenly on ground... won't slip under duress.

SIZES, CAPACITIES, ORDERING INFO:

Catalog Number	Height closed	Height extended	Cap. tons	Shpg. wt.	Price each
9 GT 7773C	8 1/2 in.	13 in.	5	5 lbs.	\$11.89
9 GT 7774C	11 1/2 in.	17 1/2 in.	10	13 lbs.	17.99
9 GT 7775C	13 in.	20 in.	12	17 lbs.	24.99
9 GT 7777C	15 1/2 in.	24 1/2 in.	20	28 lbs.	39.99

CRAFTSMAN® Steel Chains

CONSTRUCTION: Proof coil steel. Welded. Electro-galvanizing helps fight rust. Drop-forged steel grab and slip hooks. Meets Fed. Spec. RR-C271a for strength. Length of 14 ft.

SIZES, CAPACITIES, ORDER INFORMATION:


Cat. No.	Size, in.	Safe load	Wt.	Price Ea.	2 ton
9 GT 77221C	1/4	1250 lbs.	11 lbs.	\$13.99	\$25.88
9 GT 77222C	5/16	1875 lbs.	16 lbs.	17.99	32.88
9 GT 77223C	3/8	2625 lbs.	23 lbs.	26.99	48.88

Heavy-duty Towing Chain.

CONSTRUCTION: Welded, high-test steel. Electro-galvanized. Safe load 5100 pounds. Two hooks. 16 feet x 3/8-inch thick.

ORDERING INFORMATION:

9 GT 7767C—Shipping wt. 25 lbs... **\$39.88**



POWER HOISTS

(8) 1/2, 1 and 2-ton Electric Winches ^{1/2-ton capacity} \$179⁹⁵

CONSTRUCTION: Roller clutch needle bearings help reduce friction for smooth, positive action. Level wind system gives even cable wind wrapping with no stack-up. Power wind-up, free wheeling and breaking in reverse activated by switch on remote control with 10-ft. cord. Positive lock when not winding. Includes safety hook, emergency hand crank.

ELECTRICAL INFORMATION: 110-120 volt, 550 watt, 60 Hz. AC. 6-ft., 3-wire cord.

CAPACITIES, ORDER INFO: See Shpg. Note below.

1-ton capacity, 250:1 gear reduction, 50-ft. of 3/16-in. diameter aircraft cable with pulley block.
T9 GT 7820C—Shpg. wt. 30 lbs. \$179.95

2-ton capacity, 450:1 gear reduction, 50-ft. of 1/8-in. diameter aircraft cable with pulley block.
T9 GT 7821C—Shpg. wt. 30 pounds \$219.95

Rechargeable, battery operated 1/2-ton capacity Winch (not shown). Same construction as units above. Includes built-in charger, 5-amp hour, 12-v. battery, 20-ft. of 1/4-in. diam. aircraft cable.

ORDERING INFO: See Shpg. Note below.

T9 GT 7822C—Shpg. wt. 25 lbs. \$189.95

(9) 1-ton Electric Hoist \$349⁹⁵

Versatile hoist lets you mount permanently or use on overhead trolley for lifting, transporting objects.

CONSTRUCTION: Corrosion resistant housing. Two-way motor for power up or down. All-hardened spur gears, ball bearings and needle bearings provide smooth gear reductions. Single hanging hook. Single layer of cable wrapping on drum gives longer cable life. One-hand operated 6-ft. low voltage remote control. Auto shut-off on up and down cycle. Mechanical load sensing brake/lock system. 22-ft. of 3/32-in. diam. aircraft cable with safety hook.

CAPACITY: 1-ton with double line and pulley block. ELECTRICAL INFORMATION: 110-120-v. 550 watt, 60 Hz. AC. 6-ft., 3-wire cord. Low voltage control.

ORDERING INFO: See Shpg. Note below.

T9 GT 7823C—Shipping weight 36 lbs. \$349.95

SHPG. NOTE: "T" items (as T9 GT 7823C) from Chicago, Philadelphia, Atlanta or Dallas. Pay shpg. and handling charges from your Distribution Center.

MANUAL HOISTS

(10) 1/2, 1 and 2-ton Gear drive Chain Hoists ^{1/2-ton capacity} \$89⁹⁰

CONSTRUCTION: Worm gear drive mechanism with bronze and ball thrust bearings for long life. Non-slip drive plus adjustable safety brake helps keep maximum rated loads from slipping. Aluminum alloy cast housing, steel chain, forged steel swivel hooks, safety latch, rotate 360° for load positioning.

CAPACITIES, ORDER INFO: See Shpg. Note above.

1/2-ton cap. 8-ft. max. lift, 13-ft. chain. Leverage ratio 90:1.
T9 GT 7870C—Shpg. wt. 27 lbs. \$89.90

1-ton cap. 8-ft. max. lift, 13-ft. chain. Leverage ratio 150:1.
T9 GT 7871C—Shpg. wt. 35 lbs. \$129.90

2-ton cap. 8-ft. max. lift, 13-ft. chain. Leverage ratio 250:1.
T9 GT 7872L—Shpg. wt. 47 lbs. \$169.90

(11) Differential Chain Hoists ^{1/2-ton capacity} \$48⁹⁰

CONST: Designed for heavy-duty use. Strong steel chain, heat-treated forged steel hooks. Lightweight aluminum frame. Mechanical advantage of over 14 to 1 lets you lift 1/2-ton with 70-lb. pull. Meets Industry Standards for overload margin.

CAPACITIES, ORDERING INFORMATION:

1/2-ton capacity, 7-ft. lift, 26-ft. chain.
9 GT 7832C—Shipping weight 28 pounds. \$48.90

1-ton capacity, 8-ft. max. lift, 30-ft. chain.
9 GT 7833L—Shipping weight 45 pounds. \$68.90

(12) Gear Hoist \$38⁹⁰

CONSTRUCTION: Delivers 40:1 mechanical advantage. Aluminum housing. Forged steel hooks, 3/16-in. steel cable. Top hook swivels 360°. Handle lock.

CAPACITY: Gears multiply cranking power. . . let you lift up to 1500 lbs. Maximum lift 10 feet.

ORDERING INFORMATION:

9 GT 7883—Shpg. wt. 8 lbs. 2 oz. \$38.90


RECHARGEABLE BATTERY

Like all of our finest-quality hardware needs, it had to earn the right to wear the name

CRAFTSMAN®

Here's what makes this battery so outstanding:

- It gives you extra value because it can be recharged at least 200 times . . . for at least 900 hours of use
- You'd have to buy over 100 of our heavy-duty non-rechargeable batteries (that's more than \$199 worth) to get service equal to just one of our \$18.99 battery kits

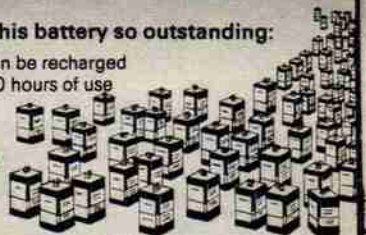

Battery alone \$13⁹⁹
Battery Kit: Incl. rechargers for 110-v. AC, 12-v. DC currents \$18⁹⁹

Greatly reduce the time and money spent buying and replacing costly lantern batteries. Recharges overnight with rechargers in Battery Kit. Restore full power by plugging into ordinary 110-120 volt electrical outlet or by plugging into cigarette lighter. Maintains almost its full-rated output even after 4 1/2 hrs. of continuous use. No heavier than regular batteries so floating lanterns still float.

BATTERY TYPE: Sealed lead acid system eliminates acid or recharging danger.

SIZE: Measures 2 1/2 x 2 1/2 x 3 3/4 inches high . . . fits standard 6-volt battery powered equipment.

ORDERING INFORMATION:

Battery without rechargers
Shipping weight 1 pound 8 ounces.
34 GT 4646 \$13.99

Complete Kit: battery plus 2 recharging adapters . . . one for 110-120 volt outlet and the other for car cigarette lighter.
Shipping weight 2 pounds.

34 GT 4647 \$18.99



Battery-powered Fluorescent Lantern \$16⁹⁹

Transistorized circuitry gives dependable operation, efficient light output, low current drain and long battery life.

CONSTRUCTION: Red textured metal case, white plastic carry handle and trim.

SIZE: 5 1/2 x 3 x 11 inches high.

BATTERY: Use two 6-v. batteries below, or 2 rechargeable 6-v. batteries sold above.

BULB: Includes 6-watt, 6000 hour-rated 9-inch fluorescent bulb.

ORDERING INFORMATION:

34 GT 4825—Shpg. wt. 2 lbs. 8 oz. . . \$16.99

6-volt Battery. With spring terminals.

34 GT 4634—Wt. 1 lb. 8 oz. Ea. \$1.99



Rechargeable Lantern \$16⁹⁹ recharges overnight

Lantern shines with continuous bright light for up to 1 1/2 hours per charge.

CONST: Molded gold-color polypropylene case, white plastic trim. Push-button on handle. Thumbscrew adjusts beam.

SIZE: 6 1/2 x 4 1/2 inches high.

BATTERY: Nickel-cadmium battery allows many recharges, recharges overnight with built-in cord on 110-120 v. AC.

BULB: PR2 bulb included.

ORDERING INFORMATION:

Shipping weight 1 pound 4 ounces.

34 GT 44101 \$16.99



COMPK LAEGJD Sears 39

Electric Impact Wrenches

FULL ONE YEAR WARRANTY ON CRAFTSMAN® ELECTRIC IMPACT WRENCHES

If any CRAFTSMAN Electric Impact Wrench fails to give complete satisfaction within one year from the date of purchase, return it to any Sears store throughout the United States and it will be replaced free of charge.



1/2-INCH
SQ. DRIVE

Delivers up to
100 ft.-lbs.
of torque

Impact Wrench alone
without Chuck (2)
or Case (3)

\$89⁵⁰

Impact Wrench with
Chuck (2)
and Case (3)

\$99⁹⁹

(1) Variable-torque Wrench

MOTOR AND TORQUE: Motor develops maximum 1/2-HP with no-load speed of 1750 rpm with two impacts per revolution. Delivers up to 100 ft.-lbs. of torque. Trigger control lets you choose the right torque for the job. Reversible... removes fasteners. Permanently lubricated ball and roller bearings. Motor brushes are easily accessible. **HOUSING:** Aluminum housing, 12 1/2 inches long. Polymer handle, end cover. Slide switch reverses rotation of impact. Removable handle for 2-hand control. Rubber boot helps protect against scuffing surfaces.

ELECTRICAL INFO: Double-insulated. 6-ft., 2-wire neoprene cord. Operates on 110-120-volt, 60-Hz. AC. 480 input watts. UL listed.

ORDERING INFORMATION: See warranty above. Wt. 8 lbs. 15 oz. 9 GT 1882.....\$89.50

Wrench (1) with Chuck (2) and Permanex® plastic Case (3).

ORDER INFO: See warranty above. 9 GT 1882C—Wt. 15 lbs. Kit \$99.99

Single-speed Wrench. (Not shown.) Like (1) above, but without variable speed. To reach lower torques needed in light-duty tasks, operate trigger intermittently. Develops maximum 1/4-HP.

ORDER INFO: See warranty above. 9 GT 1886—Wt. 9 lbs.\$79.99

(2) Chuck for Wrenches above. Converts 1/2-in. sq. drive electric wrench to drill. Grips 1/8 to 1/2-in. diameter bits. 1/2-inch square drive. Drill wood and metal.

ORDERING INFORMATION: 9 GT 2253—Wt. 1 lb. 7 oz.\$15.99

(3) Permanex® plastic Case for Wrenches above. Measures 16x13 1/2x5 inches high.

ORDERING INFORMATION: 9 GT 1456—Wt. 3 lbs. 14 oz.\$9.99

Delivers up to 40 ft.-lbs. of torque

\$59⁹⁹



3/8-INCH
SQ. DRIVE

MOTOR AND TORQUE: Motor develops maximum 1/2-HP with no-load speed of 1700 rpm with 2 impacts per revolution. Delivers up to 40 ft.-lbs. of torque. Trigger control lets you choose the right torque for the job. Reversible... removes fasteners. Sleeve bearing construction. Motor brushes are easily accessible for maintenance.

HOUSING: Polymer motor housing. 11 inches long. Slide switch reverses rotation of impact. Removable handle for two-hand control.

ELECTRICAL INFORMATION: Double-insulated. 6-foot, 2-wire neoprene cord. Operates on 110-120-volt, 60-Hz. AC. 384 full-load input watts. UL listed.

ORDERING INFORMATION: See warranty above. Shipping weight 6 pounds. 9 GT 1813.....\$59.99

Pneumatic (air-drive) Impact

Choose the wrench you need by type of spindle

Pin-retainer spindle:
Ideal for commercial/
industrial jobs where
same socket is used
for many hours

Ring-retainer spindle:
Ideal for automotive
use and other jobs
requiring quick
socket changes



3/8-INCH
SQ. DRIVE

Delivers 10
to 35 ft.-lbs.
of torque

\$140⁰⁰

Delivers up to
55 ft.-lbs. torque

Kit **\$99⁵⁰** | Wrench alone **\$79⁷⁵**

SPINDLE: Pin-retainer type... ideal for commercial or industrial jobs.

TORQUE: Delivers 10 to 35 ft.-lbs. of torque with no-load speed of 15,000 rpm. 3000 impacts per minute. Trigger control lets you adjust torque to job. Reversible.

HOUSING: Plastic-coated aluminum housing. Rubber scuff guard on nose. Measures 6 inches long.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Standard operating pressure 90 psi. Air hose of 3/16-inch recommended.

ORDER INFO: See warranty, p. 41. T9 GT 18842—Wt. 3 lbs.\$140.00

SPINDLE: Ring-retainer type.

TORQUE: Delivers up to 55 ft.-lbs. of torque. No-load speed of 14,000 rpm. 2100 impacts per minute. Trigger control lets you adjust torque to job. Reversible.

HOUSING: Cast-aluminum. Rubber scuff guard on nose. 5 3/4 inches long.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Avg. air consumption: 2 1/2 cfm at 90 psi. Air hose of 3/8-inch recommended.

ACCESSORIES: 7 sockets (5/16 thru 1 1/16-in.); Permanex® polyethylene case. **ORDER INFO:** See warranty, page 41. 9 GT 18816—Wt. 5 lbs. 12 oz. ...Kit \$99.50

Wrench alone. 9 GT 1881—Wt. 2 lbs. 13 oz. 79.75



CONSTRUCTION: Molybdenum alloy steel, black-oxide finish. 6-pt. openings.

(4) CRAFTSMAN 11-pt. 1/2-in. sq. drive Impact Socket Set. Ten 6-pt. sockets (5/16 thru 1-in.); metal tray.

ORDER INFO: Wt. 3 lbs. 12 oz. 9 GT 44019.....Set \$19.99

(5) CRAFTSMAN 7-pt. 3/4-in. sq. drive Impact Socket Set. Seven 6-pt. sockets (5/16 thru 1 1/16-in.).

ORDER INFO: Wt. 12 oz. 9 GT 44013.....Set \$12.99

Catalog Number	Size	Shpg. wt. lbs. oz.	Each
CRAFTSMAN Individual 1/2-in. drive Sockets			
9 GT 47571	5/16-in.	3	\$2.19
9 GT 47572	3/8-in.	3	2.19
9 GT 47573	1/2-in.	3	2.19
9 GT 47574	5/8-in.	3	2.19
9 GT 47575	3/4-in.	4	2.19
9 GT 47576	7/8-in.	4	2.19
9 GT 47577	1-in.	4	2.19
9 GT 44313	1 1/8-in.	5	2.19

CRAFTSMAN Individual 3/4-in. drive Sockets			
9 GT 44001	1/2-in.	5	2.19
9 GT 44002	5/8-in.	5	2.19
9 GT 44003	3/4-in.	6	2.19
9 GT 44004	7/8-in.	6	2.29
9 GT 44005	1-in.	7	2.29
9 GT 44006	1 1/8-in.	6	2.29
9 GT 44007	1 1/4-in.	7	2.29
9 GT 44008	1 1/2-in.	8	2.29
9 GT 44009	1 3/4-in.	10	2.59
9 GT 44011	1-in.	11	2.79
F9 GT 47968	1 1/8-in.	(10)	3.87
9 GT 47564	19mm.	6	2.39
9 GT 47565	20mm.	7	2.39
9 GT 47566	21mm.	7	2.39

Individual 1-in. drive Sockets (Not Craftsman)			
F9 GT 47952	5/8-in.	(13)	4.99
F9 GT 47953	3/4-in.	(13)	4.99
F9 GT 47954	7/8-in.	(1)	4.99
F9 GT 47955	1-in.	(14)	4.99
F9 GT 47956	1 1/8-in.	(14)	4.99
F9 GT 47957	1 1/4-in.	(1)	5.80
F9 GT 47958	1 1/2-in.	(1)	5.99
F9 GT 47959	1 3/4-in.	(2)	6.64
F9 GT 47961	1 1/2-in.	(2)	7.29
F9 GT 47962	1 3/4-in.	(2)	7.64
F9 GT 47963	1 1/2-in.	(2)	7.99
F9 GT 47964	1 3/4-in.	(2)	8.16
F9 GT 47965	1 1/2-in.	(2)	8.27

Catalog No.	Size	Wt. lbs.	Each
Individual 1-in. drive Sockets (Not Craftsman)			
F9 GT 47915	5/8-in.	(1)	\$8.20
F9 GT 47916	3/4-in.	(1)	8.20
F9 GT 47917	7/8-in.	(1)	8.20
F9 GT 47918	1-in.	(1)	8.20
F9 GT 47919	1 1/8-in.	(2)	8.20
F9 GT 47921	1 1/4-in.	(2)	8.20
F9 GT 47922	1 1/2-in.	(2)	8.56
F9 GT 47923	1 3/4-in.	(2)	8.56
F9 GT 47924	1 1/2-in.	(2)	8.56
F9 GT 47925	1 3/4-in.	(2)	8.80
F9 GT 47926	1 1/2-in.	(2)	8.80
F9 GT 47927	1 3/4-in.	(2)	9.04
F9 GT 47928	1 1/2-in.	(2)	9.78
F9 GT 47929	1 3/4-in.	(2)	10.16
F9 GT 47931	1 1/2-in.	(2)	10.76
F9 GT 47932	1 3/4-in.	(2)	11.38
F9 GT 47933	1 1/2-in.	(3)	12.22
F9 GT 47934	1 3/4-in.	(3)	12.58
F9 GT 47935	1 1/2-in.	(3)	12.84
F9 GT 47936	1 3/4-in.	(3)	13.99
F9 GT 47937	2-in.	(3)	15.16
F9 GT 47938	2 1/8-in.	(3)	15.64
F9 GT 47939	2 1/4-in.	(4)	18.33
F9 GT 47941	2 1/8-in.	(4)	18.82
F9 GT 47942	2 1/4-in.	(3)	19.56
F9 GT 47943	2 3/8-in.	(4)	19.99
F9 GT 47944	2 1/2-in.	(4)	26.29
F9 GT 47945	2 3/4-in.	(4)	28.73
F9 GT 47946	2 1/2-in.	(4)	30.56

(6) CRAFTSMAN Impact Adapter. Converts 1/2-in. drive to 3/8-in. drive.

ORDERING INFORMATION: 9 GT 44124—Shipping wt. 5 oz.\$2.09

(7) 1/2-in. sq. drive Double-end Socket. 6-pt., 3/4-in. opening at one end; 6-pt., 1 1/16-in. opening at other. For 1/2-in. sq. drive impact tools with extended shank (as 9 GT 18892). For short shank tools (as 9 GT 18882).

ORDER INFO: Use with (11) on p. 41. 9 GT 44110—Shpg. wt. 9 oz.\$3.19

SHPG. NOTE: "F" items (as F9 GT 47968) sent postpaid (exc. to Alaska and Hawaii) from Barton, Ohio factory. "T" items (as T9 GT 18842) from Atlanta, Chicago, Dallas, Los Angeles or Philadelphia. Pay shipping and handling charges from nearest Distribution Center. Allow extra time. No C.O.D.

Wrenches in a variety of drive sizes and torque ranges

FULL ONE YEAR WARRANTY ON CRAFTSMAN® PNEUMATIC AIR TOOLS

If any CRAFTSMAN Pneumatic Air Tool fails due to defect in material or workmanship within one year from date of purchase, we will repair it free of charge. This service available by returning tool to any Sears store or Service Center throughout the U.S.



Delivers 20 to 160 ft.-lbs. of torque

Kit **\$8388** | Wrench alone **\$5988**

SPINDLE: Ring-retainer type... ideal for automotive use and other jobs requiring quick socket changes.

TORQUE: Delivers 20 to 160 ft.-lbs. of torque. No-load speed of 7500 rpm. 2000 impacts per minute. Trigger control lets you adjust torque to job. Reversible.


HOUSING: Cast-aluminum. 7 in. long.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Average air consumption: 4 cfm at 90 psi. Air hose of 3/8-inch recommended.

ACCESSORIES: 8 sockets (7/16 thru 3/8-in.); Permanex® polyethylene case. ORDER INFO: See warranty above. 9 GT 18881—Wt. 10 lbs. 12 oz. Kit \$83.88

Wrench alone.

9 GT 1888—Wt. 6 lbs. 2 oz. 59.88



(8) "O" Rings.

Use with pins below to help secure sockets on wrenches with pin-retainer spindles.

SIZES, ORDERING INFO:

For 3/4-inch square drive sockets (3/4 thru 1 1/8-in.). F9 GT 47949—(Wt. 1 oz.)....56c

For 1-inch square drive sockets (3/4 thru 1 1/16-in.). F9 GT 47912—(Wt. 1 oz.)....56c

For 1-inch square drive sockets (1 1/4 thru 2 1/2-in.). F9 GT 47913—(Wt. 1 oz.)....67c

For 3/4-inch square drive sockets (1 1/8 thru 1 1/2-in.). F9 GT 47951—(Wt. 1 oz.)....56c

(9) Pins.

Use with "O"-rings above to help secure sockets on wrenches with pin-retainer spindles.

SIZES, ORDERING INFO:

For all 3/4-inch square drive impact sockets. F9 GT 47948—(Wt. 1 oz.)....33c

For 1-inch square drive impact sockets (3/4 thru 1 1/16-in.). F9 GT 47911—(Wt. 2 oz.)....33c

For 1-inch square drive impact sockets (1 1/4 thru 2 1/2-in.). F9 GT 47914—(Wt. 2 oz.)....33c

SHIPPING NOTE: "F" items (as F9 GT 47949) sent postpaid from Barberton, Ohio. Allow extra time. No C.O.D.

\$7995

Delivers 15 to 150 ft.-lbs. of torque

SPINDLE: Pin-retainer type... ideal for commercial or industrial jobs.

TORQUE: Delivers 15 to 150 ft.-lbs. of torque. No-load speed of 9000 rpm. 1100 impacts per minute. Trigger lets you control torque. Reversible.

HOUSING: Cast aluminum. 6 3/4 inches long.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Average air consumption: cfm—impacting 13 at 90 psi. Air hose of 3/8-inch diameter recommended.

ORDER INFO: See warranty above. Wt. 5 lbs. 3 oz. 9 GT 18825\$79.95



(10) Universal Joints. Molybdenum alloy steel with black-oxide finish.

SIZES, ORDERING INFORMATION:

Catalog Number	Drive size	Shipping weight	Each
9 GT 44123	3/8-in.	4 oz.	\$4.49
9 GT 44125	1/2-in.	8 oz.	4.79

(11) Extensions. Molybdenum alloy steel with black-oxide finish.

SIZES, ORDERING INFORMATION:

Catalog Number	Drive size	Size (in.)	Wt. lbs. oz.	Each
9 GT 4477	1/2	6	12	\$3.79
F9 GT 47966	3/4	7	(2)	13.99
F9 GT 47967	1	7	(4)	21.64

(12) Angle-head Attachments. Cast-aluminum construction. For wrenches 9 GT 18835, 9 GT 18882, 9 GT 1888 and former 9-1883.

ORDERING INFORMATION: 9 GT 18891—Wt. 2 lbs. 5 oz.\$79.99

(13) Impact Chuck. Converts 1/2-inch square drive air impact wrench to drill. Grips 1/8 to 1/2-inch diameter bits. Drill wood, metal.

ORDERING INFORMATION: 9 GT 2253—Wt. 1 lb. 7 oz.\$15.99

(14) Screwdriver Chuck and Bits. 1/2-in. sq. drive. No. 2 Phillips, Nos. 12-14, 14-16 flat bits with finders. Steel.

ORDERING INFORMATION: 9 GT 18867—Wt. 1 lb. 3 oz.Set \$24.99



Delivers up to 200 ft.-lbs. of torque

Kit **\$14499** | Wrench alone **\$7980**

SPINDLE: Ring-retainer type.

TORQUE: Delivers 10 to 200 ft.-lbs. of torque. No-load speed of 9000 rpm. 1300 impacts per minute. Trigger control lets you adjust torque to job. Reversible.

HOUSING: Cast-aluminum with rubber scuff-guard on nose. 6 1/4 inches long.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Avg. air consumption: 3 1/2 cfm at 90 psi. Air hose of 3/8-in. recommended.

ACCESSORIES: 8 sockets (7/16 thru 7/8-inch); cushion cover; Permanex® polyethylene case.

ORDER INFO: See warranty above. 9 GT 18942—Wt. 10 lbs. 8 oz.Kit \$144.99

Wrench alone. From United Kingdom. 9 GT 18882—Wt. 6 lbs. 2 oz.\$79.80

Protective Cushion Cover alone. 9 GT 18921—Wt. 8 oz.3.95

Delivers up to 240 ft.-lbs. of torque

Kit **\$16450** | Wrench alone **\$13890**

SPINDLE: Ring-retainer type.

TORQUE: 10 to 240 ft.-lbs. of torque. No-load speed of 7800 rpm. 1380 impacts per minute. Trigger controls torque. Reversible.

HOUSING: Cast-aluminum. Rubber scuff-guards on nose and heel. 6 3/4 inches long.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Avg. air consumption: 4 cfm at 90 psi. Air hose of 3/8-in. recommended.

ACCESSORIES: 8 sockets (7/16 thru 7/8-in.); cover; polyethylene Permanex® case.

ORDERING INFO: See warranty above. 9 GT 18943—Wt. 10 lbs. 8 oz.Kit \$164.50

Wrench alone. 9 GT 18835—Wt. 6 lbs. 12 oz.138.90

Wrench with 2-inch extended shank. 9 GT 18892—Wt. 7 lbs. 5 oz.144.50

Protective Cushion Cover alone. 9 GT 18922—Wt. 8 oz.3.95



\$28000

Delivers 50 to 450 ft.-lbs. of torque

SPINDLE: Pin-retainer type. **TORQUE:** Delivers 50 to 450 ft.-lbs. of torque. No-load speed of 5150 rpm. 1100 impacts per minute. Trigger control lets you adjust torque to job. Reversible.

HOUSING: Plastic-coated cast-aluminum. 9 1/4 in. long.

AIR INTAKE: Air inlet; 1/4-in. pipe thread. Standard operating air pressure 90 psi. Air hose of 3/8-in. recommended.

ORDER INFO: See warranty above. Sent from Chicago, Philadelphia, Atlanta, Dallas, L.A. Allow extra time. Pay shipping, handling from your Dist. Center. Wt. 11 lbs. 8 oz. T9 GT 18873\$280.00

\$34000

Our most rugged Impact Wrench delivers up to 1000 ft.-lbs. torque

Powerful enough for use in heavy assembly, maintenance and steel fabrication operations.

SPINDLE: Pin-retainer type... ideal for commercial or industrial jobs.

TORQUE: Delivers 200 to 1000 ft.-lbs. of torque. No-load speed of 5100 rpm. 1140 impacts per minute. Trigger control lets you adjust torque to suit the job. Reversible.

HOUSING: Cast-aluminum with side handle for two-hand control. 12 3/4 inches long.

AIR INTAKE: Air inlet: 3/8-inch pipe thread. Standard operating air pressure 90 psi. Air hose of 1/2-inch recommended.

ORDERING INFO: See warranty above. Sent from Chicago, Philadelphia, Atlanta, Dallas, L.A. Allow extra time. Pay shipping and handling from your Distribution Center. T9 GT 18874C—Shpg. wt. 31 lbs.\$340.00

CRAFTSMAN® Air-drive Tools deliver more power per pound

Rotary/Orbital-action Sander . . 2 sanding actions for finishing flat and contoured surfaces \$6980

Rotary-action provides smooth, circular sanding; orbital-action helps deliver patternless finish. Ideal for auto body work. From Japan.

PAPER SIZE: 6-inch sanding surface.

SPEED: Built-in air regulator varies speed. Free speed of 10,000 rpm.


CONSTRUCTION: Die-cast aluminum housing with rubber guard. Ball-bearing construction. Circular exhaust diffuses air flow so as not to interfere with work.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Recommended air pressure: 50 to 75 psi. 3/8-inch air hose recommended.

ORDERING INFORMATION: See warranty on facing page.

Shipping weight 5 pounds 10 ounces.

9 GT 18846 \$69.80



Orbital-action Sander for finishing flat surfaces \$6975

(1) Orbital-action Sander.

Orbital-action helps deliver patternless finish for flat surfaces. From Japan.

PAPER SIZE: 3 3/4 x 9-inch sanding surface.

SPEED: Built-in air regulator varies speed. Free speed of 8000 rpm.

CONSTRUCTION: Die-cast aluminum with rubber guard. Ball-bearing construction. Muffled rear exhaust.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Recommended air pressure: 50 to 75 psi. 3/8-inch hose recommended.

ORDER INFO: See warranty, p. 43.

9 GT 18827—Shpg. wt. 7 lbs. \$69.75

Vertical-action Sander for rough sanding or grinding \$9975



(2) Vertical-action Sander.

Vertical-action for delicate feather edging to full-speed sanding and grinding. Japan.

PAPER SIZE: 7-inch sanding surface.

SPEED: Built-in air regulator varies speed. Free speed of 5000 rpm.

CONSTRUCTION: Die-cast aluminum with plastic handles. Ball-bearing construction. Muffled handle exhaust.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Recommended air pressure: 50 to 75 psi. 3/8-inch air hose recommended.

ORDER INFO: See warranty, p. 43.

9 GT 18926—Wt. 6 lbs. \$99.75

See our complete line of ABRASIVES on page 20

3/8-in. Drills feature 1/2-HP air motors that need little maintenance



Our quietest Drill with air-exhaust diffuser, dead handle and teasing throttle with locking device \$125⁰⁰

(3) Our quietest Drill with teasing throttle.

Ideal for hole sawing, honing cylinders, drilling chassis frames and trailer bodies.

MOTOR, BEARINGS, GEARS: Air motor develops maximum 1/2-HP. Ball and needle bearing construction. Full-hardened double-reduction planetary gearing for smooth, quiet power transmission. Free speed of 900 rpm. Adjustable teasing throttle lets you vary speed . . . can be locked when desired speed is reached.

HOUSING: Die-cast aluminum, one-piece gear housing for precision alignment. 7 1/4 in. long. Removable dead handle.

CHUCK: Jacobs® 3/8-inch drill chuck.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Recommended air pressure 90 psi. 3/8-inch hose recommended.

ORDERING INFORMATION: See warranty on facing page.

9 GT 18884—Shipping weight 4 lbs. 3 oz. \$125.00

(4) Drill with teasing throttle.

Ideal for general drilling, wood boring, honing, reaming and countersinking. Imported from Japan.

MOTOR, BEARINGS, GEARS: Air motor develops maximum 1/2-HP. Ball and needle bearing construction. Full-hardened planetary gearing. Free speed of 2100 rpm. Adjustable teasing throttle lets you vary speed . . . can be locked when desired speed is reached.

HOUSING: Die-cast aluminum, one-piece gear housing for precision alignment. Steel end plates 6 1/2 in. long.

CHUCK: Jacobs® 3/8-inch drill chuck.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Average air consumption: 4 cfm at 90 psi. 3/8-inch hose recommended.

ORDERING INFORMATION: See warranty on facing page.

9 GT 18925 \$69.75

(5) Single-speed Drill.

Ideal for general drilling, wood boring, honing, reaming and countersinking. Imported from Japan.

MOTOR, BEARINGS, GEARS: Air motor develops maximum 1/2-HP. Ball and needle bearing construction. Full-hardened planetary gearing. Free speed of 2800 rpm.

HOUSING: Die-cast aluminum, two-piece gear housing. Steel end plates. 6 1/4 inches long.

CHUCK: Jacobs® 3/8-inch drill chuck.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Average air consumption: 4 cfm at 90 psi. 3/8-inch hose recommended.

ORDERING INFORMATION: See warranty on facing page.

9 GT 18847—Shipping weight 2 lbs. 15 oz. \$39.74



Die Grinder Kit for fine contour grinding and finishing

Complete kit \$129⁰⁰ | Grinder alone \$97⁶⁰

SPEED: Built-in air regulator varies speed. Free speed of 35,000 rpm.

CONSTRUCTION: Steel. Ball-bearing construction. Rear exhaust.

INCLUDED ACCESSORIES: Four double-cut solid carbide rotary burrs with 1/4-in. shank diameter (3/8-in. cylindrical shape with end cut, 3/8-in. ball shape, 1/2-inch cylindrical shape with radius end, 1/2-in. taper shape—14° included angle); 2 chuck wrenches; chuck guard; 1/8-in. collet adapter; case.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Recommended air pressure 90 psi. 3/8-in. air hose recommended.

ORDER INFO: See warranty, p. 43.

Shipping weight 2 pounds.

9 GT 18938 Kit \$129.00

Die Grinder alone.

ORDERING INFORMATION: See warranty on facing page.

9 GT 18875—Wt. 1 lb. 2 oz. \$97.60



This Drill has teasing throttle with locking device \$6975

Single-speed Drill \$3974

42 Sears COMPBK LAEGJD

than an equally rated electric tool


FULL ONE YEAR WARRANTY ON CRAFTSMAN®
PNEUMATIC AIR TOOLS

If any CRAFTSMAN Pneumatic Air Tool fails due to a defect in material or workmanship, within one year from date of purchase, we will repair it free of charge. This warranty service is available by simply returning this tool to any Sears store or Service Center throughout the United States.



**Short-barrel
Air-impact
Hammer Kit . . .
3500 blows
per minute
\$64⁵⁰**

Hammer with
retainer alone
\$39⁷⁵

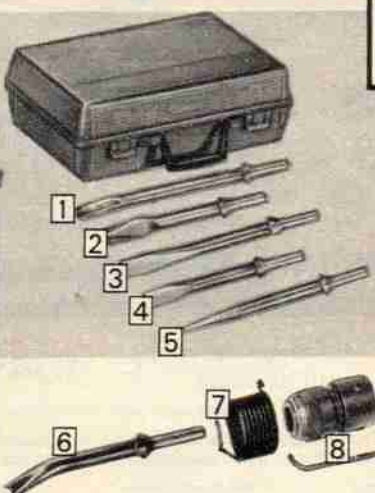

(1 thru 8) **Accessories for air impact hammers.** Forged high-carbon steel. Tempered to hold edges. Shanks ground to fit .401 openings of hammers at left and right.

ORDERING INFORMATION:

Item	Catalog Number	Type	Shipping weight	Each
(1)	9GT18811	Muffler Splitter	15 oz.	\$4.49
(2)	9GT18812	Pipe, Panel Cutter	13 oz.	4.49
(3)	9GT18813	3/4-inch Cold Chisel	13 oz.	3.49
(4)	9GT18814	Rivet Cutter	12 oz.	3.49
(5)	9GT18815	Pin Punch	13 oz.	3.49
(6)	9GT18818	Claw Ripper	7 oz.	4.49
(7)	9GT18817	Retainer Attachment	4 oz.	.69c
(8)	9GT18929	Posi-lock Retainer	1 lb. 4 oz.	18.90

**Long-barrel Air-impact
Hammer Kit . . . 2100 blows
per minute with longer
stroke for more power
\$94⁵⁰**



Hammer with
retainer alone
\$69⁷⁵

Designed for removing exhaust systems, shock absorber nuts, brake drums, license bolts, etc.
SPEED: Built-in air regulator varies speed. Provides 3500 bpm of rapid hammer action.
CONSTRUCTION: Die-cast aluminum. 6 3/4 inches long.

INCL. ACCESSORIES: Retainer (7), accessories (1 thru 5), Permanex® polyethylene case.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Average air consumption: 4 cfm at 90 psi. 3/8-inch air hose recommended.

ORDERING INFORMATION: See warranty above.
9 GT 18851—Shpg. wt. 7 lbs. 8 oz. Kit \$64.50

Hammer with Retainer alone.
9 GT 1885—Shpg. wt. 4 lbs. 5 oz. \$39.75

Longer stroke makes this our hardest hitting hammer. Designed for removing exhaust systems, shock absorber nuts, brake drums, license plate bolts, ball joints and universal joints, etc.

SPEED: Built-in air regulator varies speed. Provides 2100 bpm of hard-hitting power.


CONSTRUCTION: Die-cast aluminum. 8 3/8 in. long.

INCLUDED ACCESSORIES: Retainer (7), accessories (1 thru 5) and Permanex® polyethylene case.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Avg. air consumption: 4 1/2 cfm at 90 psi. 3/8-in. air hose recommended.

ORDERING INFORMATION: See warranty above.
9 GT 18924—Shipping weight 7 lbs. 7 oz. Kit \$94.50

Long-barrel Hammer with Retainer alone.
9 GT 18923—Shipping weight 4 pounds 13 ounces \$69.75



Needle Scaler . . . 3600 bpm \$11⁷⁰⁰

Removes accumulations of rust, scale, paint, weld splatter and corrosion from metal.

SPEED: Teasing throttle controls speed of needles. Provides 3600 blows per minute.

CONSTRUCTION: Steel. 13 3/4 inches long.

AIR INTAKE: Air inlet: 3/8-in. pipe thread. Standard operating pressure 90 psi. 1/8-inch air hose recommended.

ORDERING INFO: See warranty above.
9 GT 18879—Shpg. wt. 7 lbs. 3 oz. \$117.00

Needle Sets for Needle Scaler above.

(9) 12-pc. Needle Set. 1/8-in. diam.
9 GT 18935—Shpg. wt. 8 oz. \$3.59

(10) 29-pc. Needle Set. 3/16-in. diam.
9 GT 18936—Shpg. wt. 4 oz. 6.69



**Weld-flex Chipper . . . \$180⁰⁰
4600 bpm**

Remove chip weld splatter, trim flash, clean casting, cut metal, carve wood and stone.

SPEED: Built-in air regulator varies speed. Provides 4600 blows per minute.

CONSTRUCTION: Steel. 9 3/4 in. long.


AIR INTAKE: Air inlet: 3/8-in. pipe thread. Recommended air pressure 90 psi. 1/8-inch air hose recommended.

ORDERING INFO: See warranty above.
9 GT 18855—Shpg. wt. 4 lbs. 5 oz. \$180.00

Chisels for Weld-flex Chipper.

(11) Spoon Chisel. 1 3/8-in. cutting edge.
9 GT 18931—Shpg. wt. 14 oz. \$2.19

(12) Narrow Chisel. 3/4-in. cutting edge.
9 GT 18932—Shpg. wt. 14 oz. \$1.99

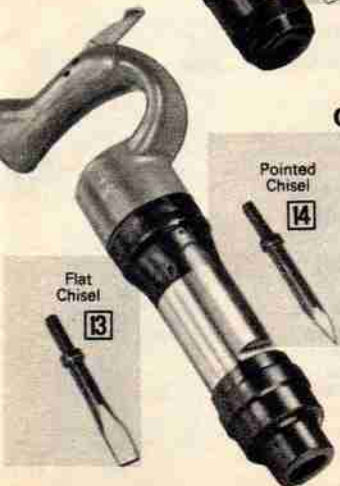

**Chipping Hammer . . . \$299⁰⁰
2150 bpm**

Powers across steel, concrete, masonry, etc.

SPEED: Built-in air regulator controls speed. Delivers 2150 blows per minute.

CONSTRUCTION: Steel. 15 1/2 in. long.

AIR INTAKE: Air inlet: 3/8-in. pipe thread. Recommended air pressure 90 psi. 3/8-inch air hose recommended.

ORDERING INFO: See warranty above.
9 GT 18828—Shpg. wt. 16 lbs. \$299.00

Chisels for Chipping Hammer.

(13) Flat Chisel. 1 3/16-in. cutting edge.
9 GT 18927—Shpg. wt. 1 lb. 6 oz. \$3.19

(14) Pointed Chisel.
9 GT 18928—Shpg. wt. 1 lb. 6 oz. \$3.19

**3/8-inch square drive
Speed Ratchet Wrench Kit
delivers up to
45 ft.-lbs. torque
\$84⁵⁰ | \$69⁷⁰**

Ideal for installing spark plugs, carburetors, water pumps, etc.

TORQUE: Delivers from 7 to 45 ft.-lbs. of torque. No-load speed of 150 rpm. Finger-controlled teasing throttle for variable torques. Reversible. 100% ball bearings.

HOUSING: Die-cast aluminum. 10 1/4 inches long. Ball-type socket retainer for quick socket changes.

INCLUDED ACCESSORIES: 5 impact sockets (3/8 thru 1/2-inch); screwdriver bit; case.

AIR INTAKE: Air inlet: 1/4-in. pipe thread. Avg. air consumption: 4 cfm at 90 psi. 3/8-inch hose size recommended.

ORDERING INFO: See warranty above.
9 GT 18804—Wt. 4 lbs. 8 oz. Kit \$84.50

Speed Ratchet alone.
9 GT 18803—Wt. 2 lbs. 5 oz. \$69.70



See pages 40
and 41 for
our complete
line of
sockets and
accessories
for ratchet

**Scribe Kit marks almost
any material for ease
in identification
\$130⁰⁰**


Excellent for coding metal, plastic, glass and wood for easy identification. Also peels away excess solder, spatter and sealer.

CONSTRUCTION: Die-cast aluminum housing. Piston-drive supplies power to high-strength carbide-tipped stylus. Turn-sleeve type throttle lets you adjust speed to the job. 5 inches long.

INCLUDED ACCESSORIES: Anvil; flat chisel; chisel blank; round-nose chisel; 2 carbide-tipped stylus points; 8-ft., 1/4-inch diameter air hose; air screen.

AIR INTAKE: Air inlet: 1/4-inch pipe thread. Recommended air pressure is 90 psi.

ORDERING INFO: See warranty above.
9 GT 18849—Wt. 5 lbs. Kit \$130.00

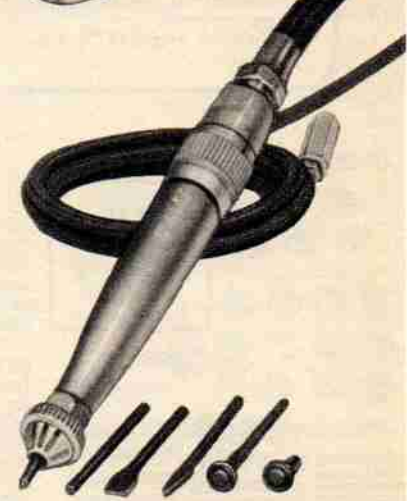



All these CRAFTSMAN Tap, Die Sets come with hex-shaped dies that let you use sockets, open-end and adjustable wrenches in tight spots.

Our Finest CRAFTSMAN® Tap and Die Set.. made of "high-speed" steel for durability

Heat-treated high speed steel wears better, stays sharper longer and provides greater tolerance accuracy than our carbon-steel sets. Engineered to "cut threads" to the dimensional tolerances required for professional auto, farm and industrial repairs.

59-Piece Set with Hex Dies

Metric Set **\$239.00** | Standard Set **\$229.00**

CONSTRUCTION: High speed steel. Black oxide coating reduces friction, gives smooth cutting action. Engineered to "cut threads" to dimensional tolerances... produce Class II threads as specified by the National Bureau of Standards U.S. Department of Commerce.

SET COMPONENTS: 23 taps, 23 dies (13 one-inch diameter, 8 1/16-in. diameter, two solid pipe taps and dies). Two adjustable die stocks, one "T" handle tap wrench. Five screw extractors. Two tap reamer wrenches. Screwdriver, thread gauge, sectioned plastic storage case, complete use instructions.

ORDER INFO: See warranty on page 51.

Metric Set. Cuts these sizes: 3x.60mm, 4x.70mm, 4x.75mm, 5x.80mm, 5x.90mm, 6x1.00mm, 7x1.00mm, 8x1.25mm, 9x1.00mm, 9x1.25mm, 10x1.25mm, 10x1.50mm, 11x1.50mm, 12x1.50mm, 12x1.75mm, 14x2.00mm, 16x1.50mm, 16x2.00mm, 18x1.50mm, 18x2.50mm. British Standard Thread pipe taps and dies cut sizes 1/8x28 and 1/4x19.

Shipping weight 13 lbs. 12 oz.

9 GT 52001Set \$239.00

Standard Set. See chart at right for list of thread sizes and types.

Shipping weight 13 lbs. 2 oz.

9 GT 52311Set \$229.00

CRAFTSMAN® Tap and Die sets made of Kromedge® carbon steel

59-piece Set with hex dies

Metric Set **\$104.99**

Standard Set **\$99.99**

41, 28, 15, and 13 piece sets also available... most in metric or standard

CONSTRUCTION: Taps and dies of tempered carbon-steel for durability, strength. Kromedge® finish for smooth cutting action... helps resist wear. All pieces are chrome plated to resist rust and corrosion.

59-piece Sets.

SET COMPONENTS: 23 taps, 23 dies (13 1-in. and 8 1/16-in. diam. 2 solid pipe taps, dies). 2 adjustable guide die stocks. 1 "T" handle tap wrench. 5 screw extractors. 2 tap reamer wrenches. Screwdriver, thread gauge, sectioned case, instructions.

ORDERING INFO: Warranty on pg. 51. Wt. 13 lbs. 12 oz.

Metric Set: Cuts these mm sizes:

3x .60, 4x .70, 4x .75, 5x .80, 5x .90, 6x1.00, 7x1.00, 8x1.25, 9x1.00, 9x1.25, 10x1.25, 10x1.50, 11x1.50, 12x1.50, 12x1.75, 14x2.25, 14x2.00, 16x1.50, 16x2.00, 18x1.50, 18x2.50. British Standard Thread pipe taps and dies cut sizes 1/8x28 and 1/4x19.

9 GT 52096\$104.99

Standard Set. See chart below for list of thread sizes and types.

9 GT 52151\$99.99

41-piece Sets.

SET COMPONENTS: 17 taps and 17 dies (1-inch diameter, one solid pipe tap and die). Adjustable guide die stock, two "T" handle tap wrenches. Tap reamer wrench, screwdriver, thread gauge, sectioned plastic storage case and use instructions.

ORDERING INFO: See warranty on page 51. Shipping weight 4 pounds 15 ounces.

Metric Set. Cuts sizes 3x.50mm, 3x.60mm, 4x.70mm, 4x.75mm, 5x.80mm, 5x.90mm, 6x1.00mm, 7x1.00mm, 8x1.25mm, 9x1.00mm, 9x1.25mm, 10x1.25mm, 10x1.50mm, 11x1.50mm, 12x1.50mm, 12x1.75mm. British Standard thread pipe tap and die cuts 1/8x28.

9 GT 52095Set \$52.99

Standard Set.

See chart below for list of thread sizes and types.

9 GT 5201Set \$49.99

28-piece Sets.

SET COMPONENTS: 11 taps and 11 dies (ten 1-inch diameter, one solid pipe tap and die). One adjustable guide die stock. "T" handle tap wrench. Tap reamer wrench. Screwdriver, thread gauge, plastic sectioned case and use instr.

ORDERING INFO: See warranty on page 51.

Metric Set. Cuts sizes 3x.60mm, 4x.70mm, 5x.80mm, 6x1.00mm, 7x1.00mm, 8x1.25mm, 9x1.25mm, 10x1.50mm, 12x1.75mm. British Standard tap and die size 1/8x28.

9 GT 52093—Shpg. wt. 4 lbs. 2 oz.Set \$41.99

Standard Set. See chart below for list of thread sizes and types.

9 GT 5200—Shpg. wt. 3 lbs. 12 oz.Set \$39.99

14-piece Metric Tap Set.

SET COMPONENTS: 14 taps (no dies). Plastic sectioned storage case.

SIZES: 3x.50mm, 3x.60mm, 4x.70mm, 4x.75mm, 5x.80mm, 5x.90mm, 6x1.00mm, 7x1.00mm, 8x1.25mm, 9x1.00mm, 9x1.25mm, 10x1.00mm, 10x1.25mm, 10x1.25mm, 10x1.50mm.

ORDERING INFO: See warranty on page 51.

9 GT 52094—Shipping weight 13 ounces\$9.99

13-piece Standard Tap and Die Set.

SET COMPONENTS: 5 taps and 5 dies. (1-inch diameter). One adjustable guide die stock. One tap wrench. Sectioned plastic storage case.

SIZES: See chart below for list of types, sizes.

ORDERING INFO: See warranty on page 51.

9 GT 52055—Shipping weight 2 lbs. 7 oz.\$15.99

Catalog Number	9 GT 52311, 9 GT 52151	9 GT 5201, 9 GT 5209	9 GT 5200	9 GT 52055
Cuts National Coarse (USS) threads	1/4-20 3/8-16 1/2-13 3/4-11	1/4-20 3/8-16 1/2-13	1/4-20 3/8-16 1/2-13	1/4-20 3/8-16 1/2-13
Cuts National Fine (SAE) threads	1/4-28 3/8-24 1/2-20 3/4-18	1/4-28 3/8-24 1/2-20	1/4-28 3/8-24 1/2-20	1/4-28 3/8-24 1/2-20
Cuts machine screw threads	6-32 10-24	8-32 12-24	4-40 10-24	6-32 8-32 12-24
Pipe thread	1/8 and 1/4-inch	1/8-inch	1/8-inch	1/8-inch

41-piece Tap and Die Set with round steel dies

\$49.99

CONSTRUCTION: Taps and dies of tempered carbon-steel for durability and strength. Kromedge finish for smooth cutting action... helps resist wear. All pieces chrome-plated to resist rust and corrosion.

SET COMPONENTS: 17 taps, 17 dies (round, 1-in. diameter... use only with die stocks, one solid pipe tap and die). Adjustable guide die stock. Tap reamer wrench, two "T" handle tap wrenches, thread gauge, screwdriver, sectioned plastic storage case and use instructions.

SIZES: See chart above.

ORDERING INFO: Warranty on page 51.

Shipping weight 4 lbs. 9 oz.

9 GT 5209Set \$49.99

Rethreading Tools restore damaged threads

(1) Tap Sets for Coarse and Fine Internal Threads

CONSTRUCTION: Tempered carbon steel.

COMPONENTS: Six taps cut 1/4, 3/8, 1/2, 3/4, 1, and 1 1/4 inch sizes. With plastic storage case.

ORDERING INFO: Shpg. wt. 10 oz.

With National Fine (SAE) Taps.

9 GT 52114Set \$5.29

With National Coarse (USS) Taps.

9 GT 52113Set \$5.29

(2) Die Sets for Fine and Coarse External Threads

CONSTRUCTION: Carbon steel.

COMPONENTS: 8 dies cut 1/4, 3/8, 1/2, 3/4, 1, and 1 1/4 inch sizes. With plastic storage case.

ORDERING INFO: Shpg. wt. 6 oz.

With National Fine (SAE) Dies.

9 GT 52112Set \$5.29

With National Coarse (USS) Dies.

9 GT 52111Set \$5.29

(3) 12-piece Tap and Die Set.

CONSTRUCTION: Carbon-steel.

COMPONENTS: 5 1/16-in. diameter hex dies, 5 standard taps. Cut sizes 1/4-20, 10-24, 10-32, 8-32, 6-32. Tap wrench and case.

ORDERING INFORMATION:

9 GT 52118—Wt. 10 oz.Set \$8.99



STANDARD Size Taps and round or hex Dies

SIZES, TYPES, ORDERING INFORMATION:

Size of item	Taps				Die diam.	Adjustable Round Dies				Hex Dies			
	Cat. No.	Wt.	Price			Cat. No.	Wt.	Price		Cat. No.	Wt.	Price	
National Coarse (UNF) Threads													
1/4-20	9 GT 5222	2 oz.	79c	1 in.	9 GT 5226	3 oz.	\$1.49	9 GT 5227	3 oz.	\$1.29			
5/16-18	9 GT 52222	2 oz.	89c	1 in.	9 GT 52269	3 oz.	1.49	9 GT 52279	3 oz.	1.29			
3/8-16	9 GT 52221	3 oz.	99c	1 in.	9 GT 52261	3 oz.	1.49	9 GT 52271	3 oz.	1.29			
1/2-14	9 GT 52223	3 oz.	\$1.19	1 in.	9 GT 52262	3 oz.	1.49	9 GT 52272	3 oz.	1.29			
5/8-12	9 GT 52224	3 oz.	1.39	1 in.	9 GT 52263	3 oz.	1.49	9 GT 52273	3 oz.	1.29			
1-10	9 GT 52225	4 oz.	1.99	1 1/2 in.	9 GT 52264	4 oz.	3.49	9 GT 52274	4 oz.	3.29			
1 1/8-8	9 GT 52226	5 oz.	2.59	1 1/2 in.	9 GT 52265	4 oz.	3.49	9 GT 52275	4 oz.	3.29			
1 1/4-7	9 GT 52227	7 oz.	3.19	1 1/2 in.	9 GT 52267	4 oz.	3.49	9 GT 52276	4 oz.	3.29			
National Fine (SAE) Threads													
1/4-28	9 GT 5221	2 oz.	79c	1 in.	9 GT 5225	3 oz.	\$1.49	9 GT 5228	3 oz.	\$1.29			
5/16-24	9 GT 52211	2 oz.	89c	1 in.	9 GT 52251	3 oz.	1.49	9 GT 52281	3 oz.	1.29			
3/8-24	9 GT 52212	3 oz.	99c	1 in.	9 GT 52252	3 oz.	1.49	9 GT 52282	3 oz.	1.29			
1/2-20	9 GT 52213	3 oz.	\$1.19	1 in.	9 GT 52253	3 oz.	1.49	9 GT 52283	3 oz.	1.29			
5/8-18	9 GT 52214	3 oz.	1.39	1 in.	9 GT 52254	4 oz.	3.49	9 GT 52284	4 oz.	3.29			
1-14	9 GT 52215	4 oz.	1.99	1 1/2 in.	9 GT 52255	4 oz.	3.49	9 GT 52285	4 oz.	3.29			
1 1/8-12	9 GT 52216	5 oz.	2.59	1 1/2 in.	9 GT 52256	4 oz.	3.49	9 GT 52286	4 oz.	3.29			
1 1/4-10	9 GT 52217	7 oz.	3.19	1 1/2 in.	9 GT 52257	4 oz.	3.49	9 GT 52287	4 oz.	3.29			
Machine Screw Taps and Dies—all N.C. (except 10-32 is N.F.)													
4-40	9 GT 52192	2 oz.	69c	1 in.	9 GT 52232	3 oz.	\$1.49	9 GT 5229	3 oz.	\$1.29			
6-32	9 GT 52194	2 oz.	69c	1 in.	9 GT 52235	3 oz.	1.49	9 GT 52299	3 oz.	1.29			
8-32	9 GT 52198	2 oz.	69c	1 in.	9 GT 52237	3 oz.	1.49	9 GT 52291	3 oz.	1.29			
10-24	9 GT 52199	2 oz.	79c	1 in.	9 GT 52239	3 oz.	1.49	9 GT 52292	3 oz.	1.29			
10-32	9 GT 5220	2 oz.	79c	1 in.	9 GT 5224	3 oz.	1.49	9 GT 52293	3 oz.	1.29			
12-24	9 GT 52201	2 oz.	79c	1 in.	9 GT 52241	3 oz.	1.49	9 GT 52294	3 oz.	1.29			

9 GT 5230—1/4 inch solid hex Pipe Die. NPT thread. Shpg. wt. 3 oz. \$1.29

METRIC Size Taps and hex Dies

SIZES, TYPES, ORDERING INFORMATION:

Taps				Dies			
(mm)	Catalog No.	Wt.	Price	(mm)	Catalog No.	Wt.	Price
3 x .50	9GT52031	2 oz.	79c	1-in.	9GT52011	3 oz.	\$1.39
3 x .60	9GT52032	2 oz.	79c	1-in.	9GT52012	3 oz.	1.39
4 x .70	9GT52033	2 oz.	79c	1-in.	9GT52013	3 oz.	1.39
4 x .75	9GT52034	2 oz.	79c	1-in.	9GT52014	3 oz.	1.39
5 x .80	9GT52035	2 oz.	89c	1-in.	9GT52015	3 oz.	1.39
5 x .90	9GT52036	2 oz.	89c	1-in.	9GT52016	3 oz.	1.39
6 x 1.00	9GT52037	2 oz.	89c	1-in.	9GT52017	3 oz.	1.39
7 x 1.00	9GT52038	3 oz.	89c	1-in.	9GT52018	3 oz.	1.39
8 x 1.25	9GT52039	3 oz.	99c	1-in.	9GT52019	3 oz.	1.39
9 x 1.00	9GT52041	3 oz.	\$1.09	1-in.	9GT52021	3 oz.	1.39
9 x 1.25	9GT52042	3 oz.	1.09	1-in.	9GT52022	3 oz.	1.39
10 x 1.00	9GT52081	3 oz.	1.09	1-in.	9GT52023	3 oz.	1.39
10 x 1.25	9GT52043	3 oz.	1.09	1-in.	9GT52024	3 oz.	1.39
10 x 1.50	9GT52044	3 oz.	1.09	1-in.	9GT52025	3 oz.	1.39
11 x 1.50	9GT52045	3 oz.	1.29	1-in.	9GT52026	3 oz.	1.39
1 1/8 x 28	9GT52048	3 oz.	1.39	1-in.	9GT52027	3 oz.	1.39
12 x 1.50	9GT52046	3 oz.	1.39	1-in.	9GT52028	3 oz.	1.39
12 x 1.75	9GT52047	3 oz.	1.39	1-in.	9GT52029	3 oz.	1.39
14 x 1.25	9GT52081	4 oz.	2.09	1-in.	9GT52030	3 oz.	1.39
14 x 2.00	9GT52082	4 oz.	2.09	1-in.	9GT52031	3 oz.	1.39
16 x 1.50	9GT52083	5 oz.	2.79	1-in.	9GT52032	3 oz.	1.39
16 x 2.00	9GT52084	5 oz.	2.79	1-in.	9GT52033	3 oz.	1.39
18 x 1.50	9GT52085	7 oz.	3.49	1-in.	9GT52034	3 oz.	1.39
18 x 2.50	9GT52086	7 oz.	3.49	1-in.	9GT52035	3 oz.	1.39
1/4 x 19	9GT52087	4 oz.	1.69	1-in.	9GT52036	3 oz.	1.39

*British Standard thread pipe tap †British Standard thread pipe die



(1) **Flush-cutting Saw.** Designed so front end grip and tension wheel combine to keep blade rigid in any position.

CONSTRUCTION: Die-cast aluminum frame, chrome-plated tube and plastic handle. Holds one 12-inch blade. Cuts in 6 different positions. Storage chamber for up to 6 spare blades.

ORDERING INFO:
Shpg. wt. 1 lb. 9 oz.
9 GT 3559—\$6.49

(2 and 3) **Flush and Standard-cutting Saws.** CONSTRUCTION: Polished nickel-plated saws—welded steel frame with reinforced back. One 10-inch blade (9 GT 65873 included).

ORDERING INFORMATION:

(2) **Standard-cutting Saw.** Cuts in 4 different positions; vertical or horizontal, to right or left. Plastic pistol-grip handle.
9 GT 3562—Shipping weight 1 lb. 12 oz. \$4.19

(3) **Flush-cutting Saw.** Cuts in 6 different positions. Studs keep blade from twisting. Grip on full handle.
9 GT 3558—Shipping weight 2 pounds \$5.19

(4) **Close quarter Hacksaw.** Uses any hacksaw blade. Comes with one 10-inch blade.

ORDERING INFORMATION:
9 GT 35481—Shipping weight 12 ounces \$3.99

(5 thru 7) **CRAFTSMAN Hacksaw Blades.** From Sweden.

(A) Semi-flexible blades: Alloy steel. In package of 5.
(B) High-Speed Design: Molybdenum alloy steel . . . lasts longer than (A) above. In package of 2.

SIZES, TYPES, ORDERING INFORMATION:

Teeth	Lgh.	Cuts	(A) Cat. No.	Wt.	Pkg.	(B) Cat. No.	Wt.	Pkg.
(5)	32	10 Tubing to 1/4-in. thin metal sheets	9 GT 65875	5	\$1.09	9 GT 65885	4	\$1.49
			9 GT 65876	5	1.29	9 GT 65886	4	1.69
(6)	24	10 Iron pipe, med. tubing 1/2-3/4 in.	9 GT 65873	5	1.09	9 GT 65883	4	1.49
			9 GT 65874	5	1.29	9 GT 65884	4	1.69
(7)	18	10 Steel bars, brass, copper 1/4 in.	9 GT 65871	5	1.09	9 GT 65881	4	1.49
			9 GT 65872	5	1.29	9 GT 65882	4	1.69

Pickup Tools and Magnets

Use to retrieve or remove small metal pieces from tight places.




(8) **Pickup tool.** Steel jaws . . . push button to open, release to close.
9 GT 41322—23 1/2-inches long. Shipping weight 7 ounces \$1.87
9 GT 41321—12-inches long. Shipping weight 5 ounces 1.67

(9) **Flexible Magnetic Pickup Tool.** Coiled spring shaft. Permanent magnetic head. Plastic handle. Nickel plated. 17 1/2-inches long.
9 GT 4178—Shipping weight 5 ounces \$2.27

(10) **Magnetic Pickup Tool/Stud Finder.** Alnico magnet at each end. With pocket clip. 5 1/4-inches long.
9 GT 4001—Shipping weight 3 ounces \$1.27

(11) **Magnetic Pickup tool with extension.** Extends to 26 3/4-inches. Lifts up to 8 oz. Double ball and socket joint. 2 1/4-in. long.
9 GT 4132—Shipping weight 9 ounces \$2.87

(12) **CRAFTSMAN Horseshoe Magnet.** Permanent type. Lifts up to 10 pounds. Plastic frame. 3-inches long.
9 GT 4003—Shipping weight 4 ounces \$1.27



(13) **Tap and Reamer Wrenches.** CONSTRUCTION: Alloy steel jaws.

ORDERING INFORMATION:
No. 4 Wrench. Takes 1/4 to 1/2-in. taps.
9 GT 5214—Wt. 10 oz. \$3.79
No. 6 Wrench. Takes 1/2 to 3/4-in. taps.
9 GT 52141—Wt. 1 lb. 10 oz. \$6.29

(14) **Adjust. Guide Die Stocks.** CONSTRUCTION: Alloy steel.

ORDERING INFORMATION:
For 1-in. round dies.
9 GT 52182—Wt. 14 oz. \$3.99
For 1 1/2-in. round dies, 1 1/4-in. hex shaped dies.
9 GT 52181—Wt. 1 lb. 14 oz. \$6.99
For 1-in. hex shaped dies.
9 GT 52185—Shpg. wt. 11 oz. \$3.99

(15) **Hand Reamer.** CONSTRUCTION: Steel. Reams 1/4 to 3/8-in. diameter.

ORDERING INFORMATION:
9 GT 5492—Wt. 6 oz. \$4.49

(16) **Tap-Reamer Wrench.** CONSTRUCTION: Heat-treated steel.

For 1/4 to 1/2-in. holes. 5 3/4-in. long.
ORDERING INFORMATION:
9 GT 5479—Wt. 5 oz. \$4.49
Thread gauges. As in sets, page 146.
ORDERING INFORMATION:
Shipping weight 3 ounces.
9 GT 52229—Standard \$2.29
9 GT 52029—Metric 2.29

(17) **Adjustable Ratchet Tap Wrench.** Steel. Centerless ground, polished. Self-equalizing jaws. Deep seating teeth. 5/16-in. cap. "T" handle.

ORDERING INFORMATION:
9 GT 4065—Shpg. wt. 12 oz. \$7.99

(18) **Tap Wrenches.** Steel.

ORDERING INFORMATION:
Fits up to 12 machine screw and 3 to 5 mm taps.
9 GT 42101—Shpg. wt. 4 oz. \$9.9c
Fits 1/8 to 1/4-in.; up to 14 machine screw and up to 5 mm taps.
9 GT 4066—Shpg. wt. 8 oz. \$3.49
Fits 12 to 3/16-in.; 5 to 8 mm taps.
9 GT 42102—Shpg. wt. 6 oz. \$1.49
Fits 1/4 to 1/2-in.; 6 to 12 mm taps.
9 GT 4067—Shpg. wt. 15 oz. \$4.49
Use with ratchets and 1/4, 1/2-in. taps.
9 GT 42103—Shpg. wt. 9 oz. \$1.99

(19) **Tap and Drill Set.** 6 Kromed steel machine taps (4-40, 6-32, 8-32, 10-32, 12-24, 1/4-20) drill sizes above; flutes (sizes 43, 36, 29, 25, 21, 7). "T" handle tap wrench, case.

ORDERING INFORMATION:
9 GT 5208—Shpg. wt. 10 oz. \$8.99

Permanex Cases. As in 59 and 41-piece sets on page 146.

ORDERING INFORMATION:
Case as in 59-pc. sets.
9 GT 5218—Shpg. wt. 3 lbs. 7 oz. \$9.99
Case as in 41-pc. set.
9 GT 5219—Wt. 1 lb. 4 oz. 5.99



(20) **CRAFTSMAN Ignition File.** Double-cut teeth. Kromed steel. 5-in. long.
ORDERING INFORMATION:
9 GT 3119—Shpg. wt. 3 oz. 46c

(21 thru 29) **CRAFTSMAN Files.** Chrome-plated steel. Plastic cases. Western Europe and India.

TYPES, SIZES, ORDERING INFO:

Type	Catalog No.	Size	Wt.	Each
(21) Shoe Rasps	9 GT 31224	8 in.	7 oz.	\$1.90
	9 GT 31225	10 in.	10 oz.	2.50
(22) Wood Rasps	9 GT 31215	10 in.	11 oz.	2.90
	9 GT 31292	6 in.	4 oz.	95c
(23) Mill Files	9 GT 31294	8 in.	6 oz.	1.45
	9 GT 31295	10 in.	9 oz.	1.85
(24) Crosscut Saw File	9 GT 3120	8 in.	6 oz.	1.90
(25) Flat Bastard File	9 GT 31254	8 in.	7 oz.	1.75
	9 GT 31255	10 in.	12 oz.	1.95
(26) Half Round Bastard File	9 GT 31234	8 in.	7 oz.	1.95
	9 GT 31235	10 in.	11 oz.	2.90
(27) Round Bastard File	9 GT 31242	6 in.	4 oz.	1.15
	9 GT 31244	8 in.	5 oz.	1.25
	9 GT 31245	10 in.	7 oz.	1.65
(28) Warding File	9 GT 3132	4 in.	2 oz.	95c
(29) Mill File (Two round edges)	9 GT 3128	8 in.	6 oz.	1.40

File Assortment, Sep. prices total \$5.90. Assortment includes one each of 8 inch files (23), (25), (27) in chart above plus one of (9 GT 3115) at right.

ORDERING INFORMATION:
9 GT 31299—Shpg. wt. 1 lb. 9 oz. \$5.44

(30) **CRAFTSMAN Needle File Set.** Swiss pattern. Kromed steel. Medium cut. No. 2 files. 5 1/2-in. long. Set of 12. Western Europe.

ORDERING INFORMATION:
9 GT 6759—Shpg. wt. 9 oz. \$11.90

(31) **CRAFTSMAN Adjustable File and Tool Handle.** For tools with tangs up to 1/4-in. diam. Use as handle for files, rasps, blades.

ORDERING INFORMATION:
9 GT 6775—Shpg. wt. 6 oz. \$1.67

(32) **CRAFTSMAN Power Mower, Garden Tool File.** Double-cut. Kromed steel. Tang formed as handle. 8-inches long. From India.

ORDERING INFORMATION:
9 GT 3115—Shpg. wt. 7 oz. \$1.45

(33) **CRAFTSMAN File Cleaning Brush.** Wood with steel bristles. 8 1/2-inches long.

ORDERING INFORMATION:
9 GT 6782—Shpg. wt. 4 oz. \$1.49

(34) **CRAFTSMAN File Handles.** Machine-turned, varnished wood.

SIZES, ORDERING INFORMATION:

Cat. No.	Size	Wt.	Each	5 for
9 GT 67811	X-small	3 oz.	59c	\$2.50
9 GT 67812	Small	3 oz.	59c	2.50
9 GT 67813	Medium	4 oz.	59c	2.50



CRAFTSMAN® Steel Pliers . . all backed by our famous

• Machine milled jaws provide firm, even holding power . . hard steel teeth endure years of wear for consistent vise-like gripping

• Precision-fitted joints open and close easily, smoothly . . large steel rivet is hardened and tempered for years of dependable performance

(1) 16-in. Arc Joint® Pliers

CONSTRUCTION: Single-hand grip clamps jaws . . combines with pipe wrench-type, milled teeth to hold work firmly. Forged alloy steel is nickel-chrome plated. Plastic-coated handles. Steel rivet. 16-in., 11 position 4-in. jaw capacity.

ORDER INFO: Warranty, pg. 47.
Shipping wt. 2 lbs. 15 oz.
9 GT 45384 \$9.97

(2) Mechanics' Pliers

CONSTRUCTION: Thin nose gets into tight places. Forged alloy steel. Steel rivet. 10½-in. long, 7 position 2-in. jaw cap.

ORDER INFO: Warranty, pg. 47.
Shipping wt. 1 lb. 3 oz.
9 GT 45375 \$3.77

(3) 9½ or 12½-inch Arc Joint® Pliers

CONSTRUCTION: Single-hand grip with pipe wrench-type, milled teeth. Chrome-plated forged alloy steel. Steel rivet.

ORDER INFO: Warranty, pg. 47.
9½-in. long. 5 position, 1½-in. jaw capacity.
9 GT 45382—Wt. 15 oz. . . \$4.77
12½-in. long. 7 position, 2½-in. jaw capacity. Wt. 1 lb. 7 oz.
9 GT 45271 \$5.97

(4) 5 inch Ignition Pliers

CONSTRUCTION: Thin jaws at 40° angle. Chrome-plated alloy steel. 3 position, ½-in. jaw cap.

ORDER INFO: Warranty, pg. 47.
9 GT 4513—Wt. 4 oz. . . . \$1.97

(5) 7-inch Battery Pliers

CONSTRUCTION: Deep-cut pipe wrench type teeth hold battery terminals or pipes firmly. 22° angle head with taper nose. Alloy steel . . nickel chrome-plated to resist rust, corrosion. Two position, ½-inch jaw capacity.

ORDER INFORMATION:
See warranty on page 47.
9 GT 44763—Shpg. wt. 8 oz. . . . \$3.17

(6) Slip Joint Pliers

CONSTRUCTION: Double-curved jaws grip ¾-in. stock or 1-in. pipe with same power. Chrome-plated forged alloy steel. Large steel rivet.

ORDER INFORMATION:
See warranty on page 47.
9 GT 45372—6½-in. Wt. 9 oz. . . \$2.67
9 GT 45373—8-in. Wt. 14 oz. . . 2.97
9 GT 45374—5½-in. Wt. 7 oz. . . 2.77

(7) Linesmen's Pliers


CONSTRUCTION: Beveled nose, side cutting jaw. Forged alloy steel with plastic coated grips. ¾-inch jaw capacity.

ORDER INFO: See warranty on page 47.
7-inches long.
9 GT 45182—Wt. 12 oz. . . . \$6.47
8-inches long.
9 GT 45181—8½-in. Wt. 1 lb. 2 oz. . . 6.97

(8) Nail cutting Nippers

CONSTRUCTION: Hand-honed cutting edges. Forged tempered steel.

ORDER INFORMATION:
See warranty on page 47.
10-in. long. Cuts up to 16-penny box nails.
9 GT 45241—Wt. 15 oz. . . . \$5.87
14-in. long. Cuts up to 16-penny nails.
9 GT 45231—Wt. 2 lbs. 5 oz. . . \$6.77

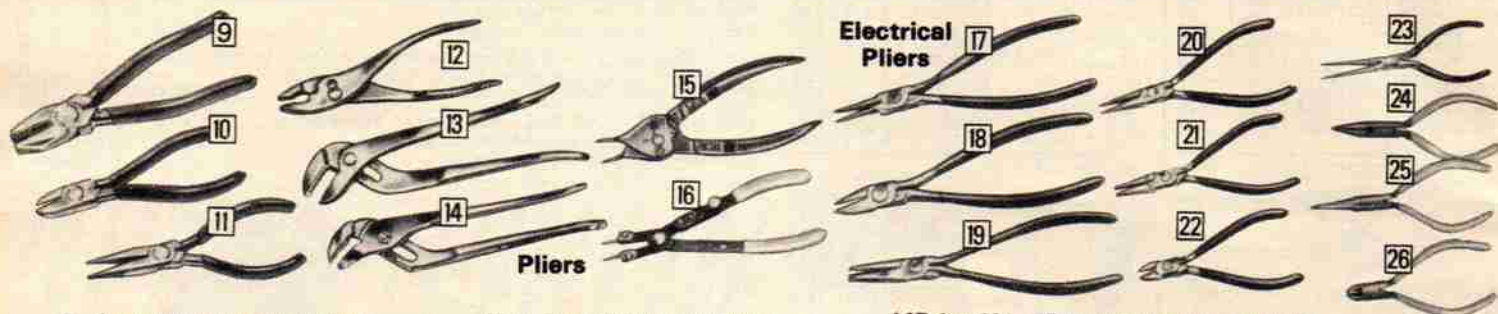

(9) Sears 7-inch Linemans' Pliers

CONSTRUCTION: Bevel nose, honed side cutters. Polished head. Alloy steel with plastic coated grips. Jaws open 1.35-in. Japan.

ORDERING INFORMATION: Not Craftsman.

9 GT 3079—Shpg. wt. 12 oz. . . . \$3.69

(10) 6-in. Diagonal Cutting Pliers

CONSTRUCTION: Hardened edges, beveled and ground. High carbon steel with plastic covered grips. Jaws open 1.2-in. From Japan.

ORDERING INFORMATION: Not Craftsman.

9 GT 3074—Shpg. wt. 7 oz. . . . \$3.37

(11) Sears Long-nose Pliers

CONSTRUCTION: Polished head, side cutters for snipping wire. High carbon-steel with plastic covered grips. Jaws open 2.2-in. Japan.

ORDERING INFORMATION: Not Craftsman.

9 GT 3077—6-inches long. Wt. 7 oz. . . \$3.37

9 GT 30803—6-inches long. Wt. 7 oz. . . 1.99

9 GT 30771—8-inches long. Wt. 9 oz. . . 3.89

(12) Sears Slip-Joint Pliers

CONSTRUCTION: Knurled handles. Drop-forged steel. Two position, 2.8-in. jaw capacity. From Japan.

ORDERING INFORMATION: Not Craftsman.

9 GT 30701—6-in. long. Wt. 8 oz. . . \$1.67

9 GT 30702—8-in. long. Wt. 10 oz. . . 1.87

(13) 9½-in. Slip Joint Utility Pliers

CONSTRUCTION: Deep milled narrow jaws. Drop forged, hardened steel. 5 position, 1.5-in. jaw capacity. Not Craftsman. From Japan.

ORDERING INFORMATION:
9 GT 3072—Shpg. wt. 14 oz. . . . \$3.09

(14) Sears Curved-Joint Pliers

CONSTRUCTION: Drop-forged steel. Not Craftsman. From Japan.

ORDERING INFORMATION:

10-in. 5 position 1½-in. jaw capacity.

9 GT 30723—Shpg. wt. 15 oz. . . \$3.67

12-in. 6 position 2-in. jaw capacity.

9 GT 30724—Wt. 1 lb. 8 oz. . . . 4.97

(15) Sears Ring Pliers

Used with Truarc® retaining rings. Handle 9 types. Compress internal-type retaining rings or expand external.

CONSTRUCTION: Alloy steel. Not Craftsman.

ORDERING INFORMATION:

Small size. For 109 ring sizes.

9 GT 45359—Shpg. wt. 5 oz. . . \$4.97

Large size. For 95 ring sizes.

9 GT 45351—Shpg. wt. 8 oz. . . . 5.27

(16) CRAFTSMAN Snap-Ring Pliers

Combination internal-external type. CONSTRUCTION: Steel with plastic covered grips. 4 pairs replacement tips; two pair straight, one pair 90°, one pair 45°.

ORDERING INFORMATION:

See warranty on page 47.

9 GT 45358—Shpg. wt. 10 oz. . . \$6.97

Replacement tips for (16). Box of four pairs.

ORDERING INFORMATION:

9 GT 4535—Wt. 3 oz. Box \$1.59

Electrical Pliers

(17 thru 19) CRAFTSMAN Precision Pliers

For intricate work on circuit boards, chassis parts, switches, sockets and all electrical components.

CONSTRUCTION: Long slender heads get into tight places, thin tips. Edges hand-honed for clean precision cutting. Polished drop forged steel . . plastic covered grips.

ORDERING INFORMATION: Warranty, page 47.

(17) 9 GT 4505—Round Needle-nose. 8 in. long. Wt. 9 oz. . . \$5.87

(18) 9 GT 4539—Thin-head diagonal. 7½-in. long. Wt. 9 oz. . 6.37

(19) 9 GT 4509—Duck-bill flat. 8-in. long. Wt. 9 oz. 5.77

(20 thru 23) CRAFTSMAN "Mini" Precision Pliers

Professional type. For close delicate work where small size is needed to get into tight places.

CONSTRUCTION: Cutters hand honed for smooth cutting. Return springs automatically open pliers when pressure is released . . let you work with one hand. Forged high-carbon steel. Heat treated and finely finished. Plastic covered grips.

TYPES. ORDERING INFORMATION: See warranty on page 47.

(20) 9GT45924—Long-nose with cutter. 4¼-in. long. Wt. 7 oz. . \$6.47

(21) 9GT45944—Flat nose. 4¼-inches long. Wt. 7 oz. 5.97

(22) 9GT45904—Flush-cut diag. 4¼-in. long. Wt. 7 oz. 6.77

(23) 9GT45946—Extra-Long nose. 5¼-in. Wt. 8 oz. 6.37

(24 thru 26) Sears "Midget" Pliers

Small size lets you maneuver in tight places. Professional-type precision designed for accurate work in hobby crafts, watchmaking and repair, model building.

CONSTRUCTION: Cutter edge honed for smooth cutting. Drop-forged high carbon steel, tempered and hardened. Vinyl covered hand grips. 4-inches long.


ORDERING INFORMATION:

TYPES. ORDER INFO: See warranty on page 47.

(24) 9 GT 30746—Long nose Pliers. Wt. 5 oz. \$2.99

(25) 9 GT 30747—Needle nose Pliers. Wt. 6 oz. 2.99

(26) 9 GT 30748—Diagonal Cut Pliers. Wt. 5 oz. 2.99

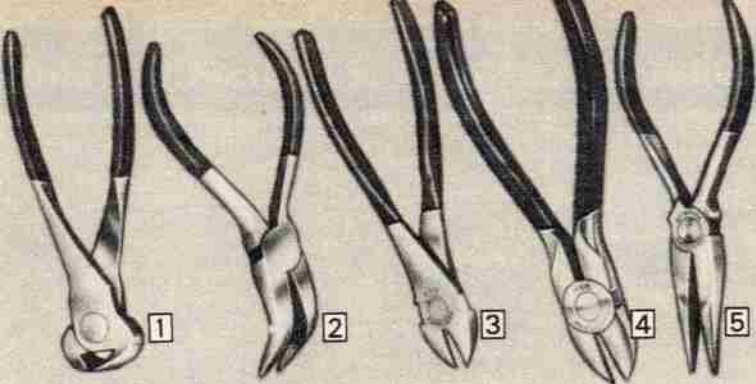

Full Unlimited Warranty

• **FULL UNLIMITED WARRANTY:** If these CRAFTSMAN pliers fail to give complete satisfaction, return them to any Sears store in the U.S. for a free replacement.

(1) End cutting Nippers

Twist, cut heavy wire and nails.
CONSTRUCTION: Alloy-steel . . . plastic coated handles. 6 in. long.
ORDER INFO: See warranty above.
9 GT 4502—Wt. 9 oz. \$5.49

(2) Bent Needle-nose Pliers

Bend wire, retrieve small parts.
CONSTRUCTION: Alloy steel. Plastic coated handles. 6 in. long.
ORDER INFO: See warranty above.
9 GT 45083—Wt. 7 oz. \$5.47

(3) Wide-jaw Diagonal-cutting pliers

Heavy-duty for cuts on steel wire, etc.—even BX cable.
CONSTRUCTION: Alloy steel with plastic coated handles. 7 in. long.
ORDER INFO: See warranty above.
9 GT 45074—Wt. 10 oz. \$5.77

(4) Diagonal Cutting Pliers

For switchboards, ignit. systems.
CONSTRUCTION: Fitted handles provide uniform close cutting action without getting in the way. Alloy steel. Jaws hardened . . . plastic covered handles.
ORDER INFO: See warranty above.
9 GT 45071—5-in. Wt. 6 oz. . . \$4.97
9 GT 45072—6-in. Wt. 9 oz. . . 4.97
9 GT 45073—7-in. Wt. 10 oz. . 5.77

(5) Long Chain-nose Pliers

Form wire loops, grip tiny pieces.
CONSTRUCTION: Wide side cutters, long tapered jaws. Alloy steel with plastic coated handles.
ORDER INFO: See warranty above.
9 GT 45081—6-in. Wt. 9 oz. . \$5.37
9 GT 45082—8-in. Wt. 10 oz. . 5.77
6-in. pliers without side cutters
9 GT 45084—Wt. 9 oz. \$3.87

Locking Plier-Wrench

10-inch size gives you over 2 tons of gripping power



(6) Straight jaw 7 1/2-inch pliers

\$3.69



(7) Double-curved jaws

Holds like a pliers . . . locks like a vise


(6 and 7) Does the work of pliers, clamp, gripping tool, pipe or locking wrench, adjustable wrench and portable vise.

CONSTRUCTION: Cold-forged steel with serrated jaws. Give you 1 1/2 tons of gripping power. Shaped to let you work in tight places. Thumb screw in handle adjusts jaw locking size. Squeeze handles to lock . . . slight upward pressure on release handle unlocks jaws. Strong spun rivet assembly. Nickel plated to resist rust, corrosion.

TYPES, SIZES, ORDERING INFORMATION: See warranty above.

Cat. No.	Max. length	Locked Cap.	Open Cap.	Wt.	Price ea.
9 GT 45342	7 1/2 in.	1 1/4 in.	1 3/4 in.	1 lb. 1 oz.	\$3.69
9 GT 45341	10 in.	1 1/2 in.	2 in.	1 lb. 8 oz.	4.39
(7) With double-curved jaws. Made for round stocks					
9 GT 45964	7 1/2 in.	1 1/4 in.	1 3/4 in.	1 lb. 1 oz.	3.79
9 GT 45961	10 in.	1 1/2 in.	2 in.	1 lb. 7 oz.	4.49

Locking Plier-Wrench Set. 1 ea. 7 1/2, 10-in. straight jaw Pliers (6).
9 GT 45348—Shipping weight 2 pounds 9 ounces Set \$7.49

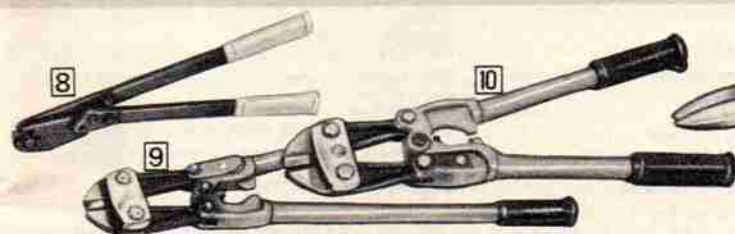

(8 thru 10) Rod and Bolt Cutters

(8) CRAFTSMAN 17 inch Cutters

Compound cutting action cuts through soft steel up to 3/16-inch diameter. Also bends wire up to 1/4 inch thick.
CONSTRUCTION: Steel jaws . . . hardened for extra strength. Plastic covered handles for gripping comfort. Center cutting action.
ORDER INFO: Warranty above. Wt. 3 lbs. 7 oz.
9 GT 6560 \$14.77

(9) Sears 24-inch Cutters

Compound cutting action cuts through 3/8-inch diameter soft or medium hard bolts and rods. Japan. *Not Craftsman.*
CONSTRUCTION: Drop forged-alloy-steel jaws. Vinyl covered grips. Center cut.
ORDERING INFORMATION:
9 GT 6566C—Shipping weight 8 pounds \$19.77

(10) Sears 14-inch Cutters

Compound cutting action cuts through 1/4-inch diameter soft or medium hard bolts. From Japan. *Not Craftsman.*
CONSTRUCTION: Tempered steel jaws . . . hardened for strength. Vinyl covered grips. Center cut.
ORDERING INFORMATION:
9 GT 6565—Shipping weight 3 pounds 1 ounce . . . \$12.87

Oilers



(15) CRAFTSMAN Pump Oil

Nickel-plated steel. 1-pc. dome, seamless bottom. 7-in. spout. 14-oz. capacity.
ORDER INFO: Warranty above. Wt. 14 oz.
9 GT 5582 \$2.67

(16) Utility Oiler.

Steel. Spring bottom. 4-in. spout. 10-oz. cap.
ORD. INFO: *Not Craftsman.*
9 GT 5578—Wt. 6 oz. \$8.9c

(17) Household Oiler.

Steel. Spring bottom. 4 1/2-in. spout, bent tip. 1-oz. cap.
ORD. INFO: *Not Craftsman.*
9 GT 5575—Wt. 3 oz. \$4.9c

(18, 19) CRAFTSMAN Trigger Oilers


Nickel-plated steel. 1-pc. dome, seamless bottom. Plunger handle, washer.
ORDERING INFORMATION: See warranty above.

(18) 6-ounce capacity. 6-in. spout. Shpg. wt. 10 oz.
9 GT 5581 \$2.37

(19) 4-ounce capacity. 4 1/2-in. spout. Shpg. wt. 8 oz.
9 GT 5580 \$1.77

(20) Machine Oil

Non-corrosive light duty type oil in 1-qt. can.
ORD. INFO: Wt. 2 lbs. 7 oz.
9 GT 55941 \$1.77

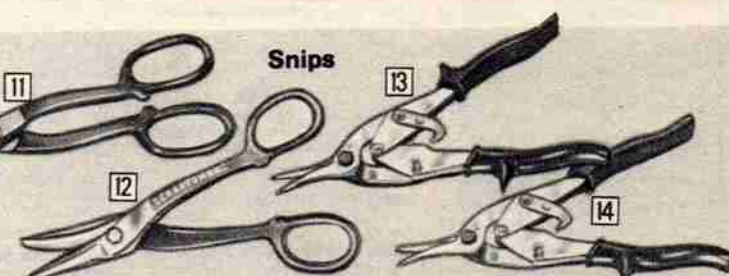

Snips

(11) Sears Straight-Cut Snips

Cut sheet metal, leather, rubber, plastic, etc. *Not Craftsman.*
CONSTRUCTION: Drop-forged steel with polished jaws. Inductive hardened cutting edges. Measures 10-inches long. 2 1/2-inch maximum cut.
ORDERING INFORMATION:
Shipping weight 1 lb. 3 oz.
9 GT 45432 \$3.97

(12) CRAFTSMAN Duck-bill Snips

Cuts sheet metal, screening, wire and more.
CONSTRUCTION: Forged steel blades make straight, irregular or circular cuts.
ORDER INFO: Warranty above.
7-in. Maximum cut 1 1/4 in.
Shipping weight 10 ounces.
9 GT 45463 \$3.97
10-in. Maximum cut 2 1/2 inches.
Shipping wt. 1 lb. 1 oz.
9 GT 45461 \$5.37
12-in. Maximum cut 3 inches.
Shipping wt. 1 lb. 13 oz.
9 GT 45462 \$6.77

(13 and 14) CRAFTSMAN Compound-leverage Snips

Compound leverage gives you a 12 to 1 power ratio to cut with half the effort of conventional snips.
CONSTRUCTION: Forged alloy-steel heat treated and hardened for strength. Chrome-plated blades with serrated edges resist rust. 10 in. long with 1 3/4-in. maximum cut. Plastic coated handles.

(13) For straight cuts

Lock arm color coded yellow.
Shipping weight 1 lb. 1 oz.
ORDERING INFORMATION:
See warranty above.
9 GT 4275 \$6.97


(14) For right or left cut

ORDERING INFORMATION:
See warranty above.
Right cut. Lock arm color coded green. Shipping weight 1 lb. 1 oz.
9 GT 4273 \$6.97
Left cut. Lock arm color coded red. Shipping weight 1 lb. 1 oz.
9 GT 4274 \$6.97

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Auto Repair Tools can reduce labor costs for do-it-yourselfers and

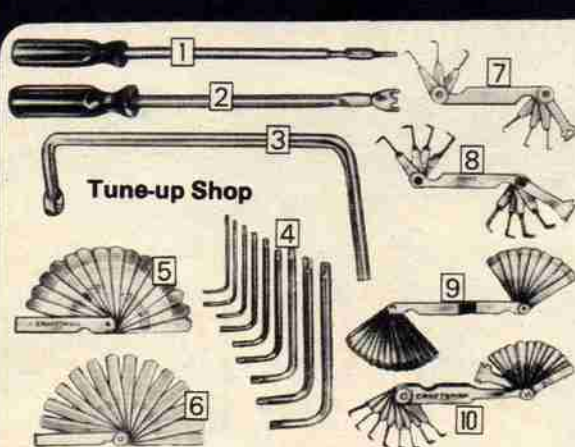

Tune-up Shop

(1) **CRAFTSMAN Adjuster.** For Delco Distributors. Flexible shaft.
ORDERING INFO:
9 GT 47723—Wt. 5 oz. ...\$3.27

(2) **CRAFTSMAN Carburetor Adjuster.** For adjusting idle.
ORDERING INFO:
9 GT 47727—Wt. 5 oz. ...\$2.17

(3) **Distributor Wrenches.** Each have 12-point openings. Offset design permits easy access to mounting bolt. Steel alloy heat-treated, cadmium-plated. Japan.
USES. ORDERING INFO:
For Buick, Pontiac, Oldsmobile, 1/2-in. opening.
9 GT 47753—Wt. 12 oz. ...\$3.89
For Chrysler-built cars, IHC trucks with V-8 engines, 1/2-in. opening.
9 GT 47754—Wt. 15 oz. ...\$3.89
For Chevrolet, 3/8-in. opening.
9 GT 47755—Wt. 11 oz. ...\$3.89
For Ford, Mercury, 1/2-in. opening.
9 GT 47756—Wt. 12 oz. ...\$3.89

(4) **Torx™ Drive Key Set.** Nine keys for No. 6 thru 1/2-in. diameter screws with Torx recesses. Alloy steel.
ORDER INFO: Wt. 10 oz.
9 GT 47757—Set \$2.27

(5) **CRAFTSMAN Go-no-go Gauge.** 15 blades: .006-.008 thru .020-.022 in. Steel.
ORDERING INFORMATION:
9 GT 40803—Wt. 5 oz. ...\$1.99

(6) **5-Blade Ignition Gauge.** For Chrysler products. Brass. Non-magnetic.
ORDERING INFORMATION:
9 GT 40809—Wt. 3 oz. ...\$7.90


(7) **13-Blade Metric Gauge.** Sizes .05mm to .10mm plus 1.00mm. Steel.
ORDERING INFORMATION:
9 GT 40804—Wt. 6 oz. ...\$2.17

(8) **6-wire Spark-plug Gap Gauge.** Steel.
ORDERING INFORMATION:
9 GT 40808—Wt. 4 oz. ...\$1.19

(9) **8-wire Spark-plug Gap Gauge.** Steel.
ORDERING INFORMATION:
9 GT 4075—Wt. 4 oz. ...\$6.90

(10) **CRAFTSMAN Offset Gauge.** 26 leaves .005 to .030 in., each 3 3/8 in. long; 1-in. offset allows adjustment of "V" engine tappets. Made of steel.
ORDERING INFORMATION:
9 GT 40802—Wt. 8 oz. ...\$2.97

(11) **CRAFTSMAN Ignition Gauge.** 14 leaves .012-.032 in.; 8 wires .022-.040 in. Steel.
ORDERING INFORMATION:
9 GT 40801—Wt. 4 oz. ...\$2.17

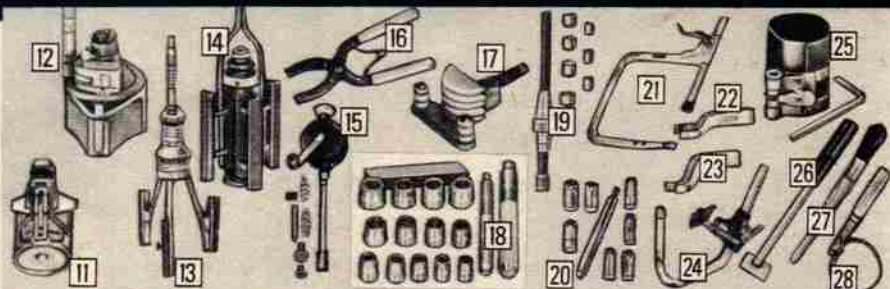

CRAFTSMAN® Engine and Ignition Shop

(11) **Ridge Reamer.** Wide range . . 2 1/2 to 4 1/2 in. Dual-action wrench, carbide cutter.
ORDERING INFORMATION:
9 GT 4723—Shpg. wt. 2 lbs. 9 oz. ...\$11.77

(12) **Lathe-type Ridge Reamer.** Tool steel cutter. For all 3 to 4 1/2-in. diam. cylinders, and short stroke motors with piston in place.
ORDERING INFORMATION:
9 GT 4713—Shpg. wt. 1 lb. 14 oz. ...\$19.77

(13) **Glaze Breaker.** Range of 2 to 7 inches. Operates with 1/4 to 3/8-in. electric drill.
ORDERING INFORMATION:
9 GT 4633—Shpg. wt. 1 lb. 14 oz. ...\$15.77

Replacement Stones for (13). Package of 3.
ORDERING INFORMATION:
9 GT 46331—Shipping wt. 5 oz. ...Pkg. \$4.99

(14) **Cylinder Hone.** Size cylinders to precise tolerances. Range 2 1/4 to 4 1/2 in. Two 5-in. stones cut fast and accurately. Universal joint action. Shank and extension fit 1/2-in. drill, drill press.
ORDERING INFORMATION:
9 GT 4682—Shipping wt. 11 lbs. ...\$79.88

Replacement Stones for (14). Each set includes 2 stones and 2 pads.
GRITS AND ORDERING INFORMATION:
9 GT 4687—Medium, 180 Grit. Wt. 11 oz. ...Set \$7.97
9 GT 4686—Coarse, 80 Grit. Wt. 11 oz. ...Set \$7.97

(15) **Valve Grinder.** Reciprocating, progressive action. Long and short stems, two suction cups, two adapters. For auto and small engine valves.
ORDERING INFORMATION:
9 GT 47042—Shipping wt. 1 lb. 12 oz. ...\$4.97

(16) **Piston Ring Expander.** For 3/4 to 1 1/4-in. rings.
ORDERING INFORMATION:
9 GT 4662—Shpg. wt. 7 oz. ...\$2.97

(17) **Tubing Bender.** For bending fuel, brake hydraulic lines; for 1/8, 1/4, 3/8, 1/2-in. tubing.
ORDER INFO: Not for 3/4-in. steel tubing.
9 GT 47605—Shipping wt. 1 lb. 2 oz. ...\$6.77

(18) **15-pc. Bushing Driver Set.** With 13 collars (1/8 to 1 1/4-in. inside diam., 1/4 to 1 1/4-in. outside diam.). Two driving handles. Plastic box.
ORDERING INFORMATION:
9 GT 4707—Shpg. wt. 4 lbs. 4 oz. ...Set \$22.97

(19) **Clutch Aligning Set.** 8 diameters: .590, .612, .624, .668, .749, .786, .808, .984-in.; 9 in. long.
ORDERING INFORMATION:
9 GT 4728—Shipping wt. 1 lb. 12 oz. ...Set \$8.77

(20) **8-pc. Gasket Punch Set.** Cuts holes in gaskets and rubber hose. Not for metal. Includes sizes 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 1 in. Includes sizes 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 1 in.
ORDERING INFORMATION:
9 GT 3635—Shipping wt. 1 lb. 6 oz. ...Set \$14.97

(21) **Valve Spring Compressor.** 9x11-inch steel frame, 10 1/2-in. opening. No. 1 spring steel jaws . . fit 90% of all spring sizes.
ORDERING INFORMATION:
9 GT 4695—Shipping wt. 6 lbs. 2 oz. ...\$8.87

(22) **No. 2 Jaws.** For GMC, Continental engines. Fits compressor (21) above.
ORDERING INFORMATION:
9 GT 4697—Shipping weight 6 oz. ...Pair \$1.09

(23) **No. 5 Jaws.** For Plymouth, Dodge, Chrysler. Fits compressor (21) above.
9 GT 4699—Shipping weight 6 oz. ...Pair \$1.69

(24) **Piston Groove Cutter and Cleaner.** Five point sizes for grooving, one for trimming, cleaning. Fits over pistons up to 5 inches in diameter.
ORDERING INFORMATION:
9 GT 4722—Shipping wt. 1 lb. 2 oz. ...\$7.87

(25) **Ratchet-type Ring Compressor.** For auto or light truck piston rings. Range of 2 1/4 to 5 in. Two tension bands compress ring uniformly; 3 1/2 in. deep, takes up to 4 rings at a time. With key wrench.
ORDERING INFORMATION:
9 GT 4716—Shipping weight 14 oz. ...\$2.98

(26) **Gasket Scraper.** Three blades measure 1, 1 1/2, and 2 inches wide.
ORDERING INFORMATION:
9 GT 47725—Shipping weight 9 oz. ...\$3.47

(27) **Parts Cleaning Brush.** Sturdy aluminum handle, tough polypropylene bristles.
ORDERING INFORMATION:
9 GT 47602—Shipping weight 6 oz. ...\$2.77

(28) **Oil Filter Wrench.** Removes even tightest spin-on oil filters.
ORDERING INFORMATION:
9 GT 47608—Shipping wt. 1 lb. ...\$3.87



CRAFTSMAN® Brake Shop

(29) **Brake Spring Pliers.** Alloy steel, 13 1/2 in. long.
ORDERING INFORMATION:
Shipping weight 1 lb. 3 oz.
9 GT 47395 ...\$5.77

(30) **Spring Washer Pliers.** Steel, nylon-capped grips.
ORDERING INFORMATION:
9 GT 47721—Wt. 8 oz. ...\$3.27

(31) **Lock-ring Pliers.** Open to 1 1/4 in. Forged steel, 8 1/2 in. long.
ORDERING INFORMATION:
9 GT 4735—Wt. 10 oz. ...\$3.79


(32) **Brake Bleeder Wrench.** 3/8, 1/2-in. hex ends. For GM cars since 1955; 1965 Lincoln and Thunderbird. Chrome-plated alloy steel.
ORDERING INFORMATION:
Not Craftsman.
9 GT 47603—Wt. 5 oz. ...\$3.77

(33) **Brake Adjusting Tool.** Chrome-plated, drop-forged alloy steel, 1 1/2-in. blade. Overall measures 3/4 in. wide, 9 1/4 in. long.
ORDERING INFORMATION:
9 GT 4740—Wt. 8 oz. ...\$1.59

(34) **Chevrolet Brake Adjusting Tool.** For Bendix brakes. Made of steel.
ORDERING INFORMATION:
9 GT 4738—Wt. 6 oz. ...\$1.39

(35) **Brake Cylinder Hone.** Three pads polish the cylinder without cutting. Range of 3/4 to 1 1/2 in. Controlled pressure. Flexible shaft. For 1/4-in. drill.
ORDERING INFO:
9 GT 4656—Wt. 6 oz. ...\$8.87

Replacement Stones for (35). Package of 3 stones.
ORDER INFO: Wt. 3 oz.
9 GT 4657 ...Pkg. \$2.49

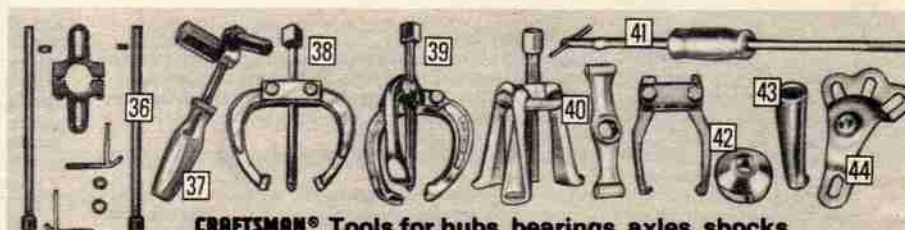

CRAFTSMAN® Tools for hubs, bearings, axles, shocks

(36) **MacPherson Strut Spring Compressor.** For removing shock absorbers with MacPherson struts.
ORDERING INFORMATION:
9 GT 47601—Shpg. wt. 12 lbs. 3 oz. ...\$57.50

(37) **Universal Shock Absorber Tool.** Steel.
ORDERING INFORMATION:
9 GT 47604—Shipping weight 14 oz. ...\$7.67

(38) **Two-jaw Puller.** Drop-forged alloy steel jaws. Fine-pitch screw thread.
SIZES AND ORDERING INFORMATION:

Catalog No.	Jaw Spread	Reach	Shpg. wt.	Price
9 GT 46941	0 to 3 in.	2 1/4 in.	12 oz.	\$8.47
9 GT 46901	0 to 5 1/2 in.	3 1/4 in.	1 lb. 12 oz.	10.69
9 GT 46911	0 to 8 in.	5 1/4 in.	3 lbs. 2 oz.	17.49
9 GT 4692	0 to 10 in.	8 1/4 in.	8 lbs. 12 oz.	29.97

(39) **Three-jaw Puller.** As above but 1 more jaw for more balance; 0-5 1/2-in. spread, 3 1/4-in. reach.
9 GT 46902—Shpg. wt. 2 lbs. 2 oz. ...\$17.27

(40) **Hub Puller and Striking Wrench Set.** 3 adjustable arms; use any wheel studs. For 7 1/2-in. bolt circles. Forged steel.
ORDERING INFORMATION:
9 GT 46642—Shpg. wt. 10 lbs. 8 oz. ...Set \$32.77

(41) **Slide Hammer.** Use with accessories below. Heat-treated alloy steel. 24 inches long.
ORDERING INFORMATION:
9 GT 4696—Shipping wt. 5 lbs. 6 oz. ...\$9.97

(42) **Two-jaw Reversible Puller.** Fits (41). Pulls bearings and retainers. Jaws pull inside or outside. With a capacity of 1 1/2 to 4 1/2 inches outside, 1 1/4 to 3 1/2 inches inside.
ORDERING INFORMATION:
9 GT 46961—Shipping wt. 1 lb. 8 oz. ...\$12.47

Conversion Kit. Converts two-jaw puller (42) to 3-jaw puller. Capacity outside 1 1/2 to 4 1/2 inches, inside 1 1/4 to 3 1/2 inches.
ORDERING INFORMATION:
9 GT 46962—Shipping weight 10 oz. ...Kit \$7.97

(43) **Seal Hook.** Fits (41). Pulls seals, bearings.
ORDERING INFORMATION:
9 GT 46964—Shipping wt. 4 oz. ...\$4.97

(44) **Axle Puller.** Fits (41). For flange-type rear axles with up to 5/8-in. studs and 4, 5 or 6 bolt circle up to 5 1/2-in. diameter.
ORDERING INFORMATION:
9 GT 46963—Shipping wt. 1 lb. 12 oz. ...\$10.47

labor time for professionals



Do-it-yourself
Auto Body Kit

***\$29.77**

CRAFTSMAN® Body and Fender Shop

(1) Do-it-yourself Auto Body Repair Tool and Finishing Kit.

INCLUDES: Dent puller, finishing hammer, dolly, body filler, hardener, filler shaper blade, blade holder, sanding block, 10 assorted sandpaper refills, instructions.
ORDERING INFORMATION:
Shpg. wt. 9 lbs. 2 oz.
9 GT 4174 Kit \$29.77

10-pc. Auto Body Repair Set.

INCLUDES: (2) thru (10) with tool box (9 GT 6512) p. 34. Save \$4.51. Separate prices total \$79.39.
ORDER INFO: Wt. 29 lbs.
9 GT 45882C Set \$74.88

(2 thru 6) Drop-forged heads. Fiber glass handles. 12 in. long.


(2) Bumping Hammer. For panel work. With 5-in. head; 1½-in. square face, 1½-in. round face.
ORDERING INFORMATION:
9 GT 45511—Wt. 1 lb. 6 oz. \$6.44

(3) Light Bumping Hammer. With 3½-in. head; ¾-in. square face, 1½-in. round face.
ORDERING INFORMATION:
9 GT 45501—Wt. 1 lb. \$6.44

(4) Blunt Pick Hammer. 5½-in. head; 1½-in. round face, 3-in. pick.
ORDERING INFORMATION:
9 GT 45531—Wt. 1 lb. 3 oz. \$6.44

(5) Pointed Pick Hammer. With 5½-in. head; 1½-in. round face, 2¼-in. pick.
ORDERING INFORMATION:
9 GT 45561—Wt. 1 lb. 3 oz. \$6.44

(6) Cross-pain Hammer. Brings out narrow bead surfaces. With 5-inch head; 1½-inch round face, 3x¼-inch cross-pain.
ORDERING INFORMATION:
9 GT 45521—Wt. 1 lb. 4 oz. \$6.44

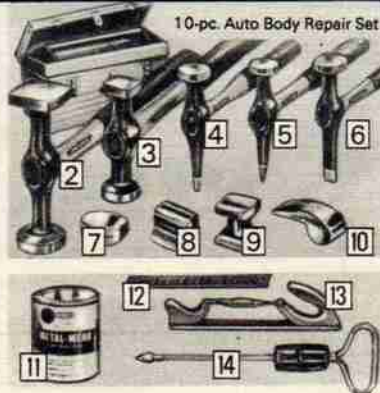

10-pc. Auto Body Repair Set

(7) Heal Dolly. Ideal for shrinking work. Drop-forged steel.
ORDERING INFORMATION:
9 GT 45621—Wt. 2 lbs. 11 oz. \$7.77

(8) Universal Dolly. For crowned surfaces. Two beading surfaces. Made of drop-forged steel.
ORDERING INFORMATION:
9 GT 45611—Wt. 3 lbs. 6 oz. \$7.77

(9) All-purpose Dolly. For bumping and roughing out. Eight molding, beading surfaces. Bottom for panel, fender-skirt work. Drop-forged steel.
ORDERING INFORMATION:
9 GT 45651—Wt. 3 lbs. 2 oz. \$7.77


(10) Combination Dolly and Spoon. For working on roof rails, behind door and body posts. Made of drop-forged steel.
ORDERING INFORMATION:
9 GT 45631—Wt. 3 lbs. 9 oz. \$7.99

(11) Metal Mend. Plastic compound body filler. No heat required.
ORDER INFO: Wt. 2 lbs. 7 oz.
9 GT 45742 32-oz. can \$2.99

(12) Kromedge® 14-in. Auto Body File. Curved teeth cut fast into metal and fillers.
ORDERING INFORMATION:
9 GT 3114—Wt. 14 oz. \$7.90

(13) Adjustable File Holder. Cast aluminum frame. For concave, convex, straight filing. Use with auto body file (12) above.
ORDERING INFORMATION:
9 GT 31134—Wt. 2 lbs. 4 oz. \$15.80

(14) Dent Puller. Just screw into surface, pull out dent, fill hole. Metal handle grip. Contour slide handle grip. 14 in. long.
ORDERING INFORMATION:
9 GT 45701—Wt. 2 lbs. 2 oz. \$7.27

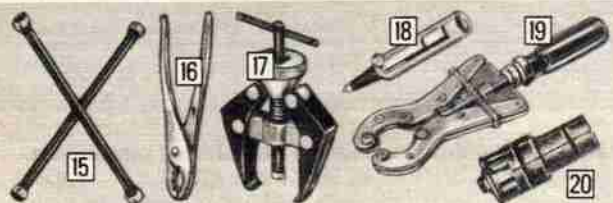

Tire, Battery, Hose, Tailpipe Tools

(15) CRAFTSMAN Cross-rim Wrench with 16½-in. arms. Chrome-plated steel. Openings of ¾, 1½, ¾ in., 19 mm.
ORDERING INFORMATION:
9 GT 44888—Wt. 3 lbs. 2 oz. \$5.47

CRAFTSMAN Wrench with 22½-in. arms. As above. Openings of ¾, 1½, ¾ in., 19 mm.
ORDERING INFORMATION:
9 GT 44889—Wt. 4 lbs. 10 oz. \$6.47

(16) CRAFTSMAN Hose Clamp Pliers.
ORDERING INFORMATION:
9 GT 45391—Wt. 13 oz. \$3.97

(17) CRAFTSMAN Terminal Clamp Lifter.
ORDERING INFORMATION:
9 GT 47147—Wt. 15 oz. \$5.87


(18) CRAFTSMAN Terminal Clamp/Battery Post Cleaner. Stainless steel spring cutters resist corrosion.
ORDERING INFORMATION:
9 GT 47633—Wt. 7 oz. \$2.97

(19) Muffler Tailpipe Cut-off Tool. Four cutting wheels cut quick, clean. 1½ to 2½-in. range.
ORDERING INFORMATION:
9 GT 47607—Wt. 1 lb. 10 oz. \$9.77

Set of 4 Replacement Cutter Wheels for (19) above.
ORDERING INFORMATION:
9 GT 47611—Wt. 3 oz. Set \$3.49

(20) Tailpipe Expander. 1½ to 2½-in. range. For use with impact wrench.
ORDERING INFORMATION:
Shpg. wt. 2 lbs. 14 oz.
9 GT 47606 \$9.77

CRAFTSMAN® Steel Alloy Punches, Chisels, Line-up Tools

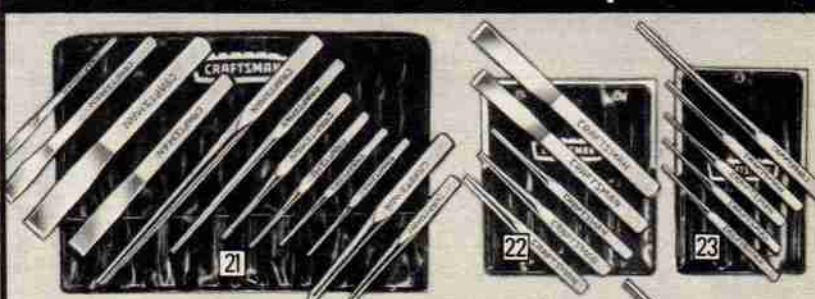

*CONSTRUCTION: All items (21 thru 32) made of double heat-treated alloy steel with chrome-plated finish. Square shape for easy gripping, helps prevent rolling off workbench. Punches precision-ground. Items (21 thru 25) packed in plastic pouch.

(21) 12-pc. Punch, Line-up and Chisel Set. Handles all needs of master mechanic.
SET INCLUDES: Six punches: ½, ⅝, ¾, 1, 1½, 2-in. pin; ½-in. center; ½-in. prick. Two line-up tools: ½x7 and ½x9-in. Four cold chisels: ¼, ½, ¾, 1-in.

ORDERING INFORMATION:
Shipping weight 2 lbs. 4 oz.
9 GT 43031 Set \$15.77

(22) 5-pc. Chisel, Punch Set. SET INCLUDES: Two cold chisels: ½, ¾-in. Three punches: ½-in. center, ½x2 and ½x4-in. pin.
ORDERING INFORMATION:
Shipping weight 1 lb. 9 oz.
9 GT 4302 Set \$7.29

(23) 5-pc. Punch, Line-up Set. SET INCLUDES: Four pin punches: ¼, ⅝, ¾, 1, 1½-in. One line-up tool: ½x2-in.
ORDER INFO: Wt. 1 lb.
9 GT 4285 Set \$6.97

(24) 4-piece Pin Punch Set. SET INCLUDES: Sizes ¼, ⅝, ¾, 1, 1½-in.
ORDER INFO: Wt. 1 lb.
9 GT 4311 Set \$5.27

(25) 3-pc. Cold Chisel Set. SET INCLUDES: Sizes ¼, ½, ¾ and 1-in.
ORDERING INFORMATION:
Shipping weight 10 ounces.
9 GT 4309 Set \$4.27

FOR SAFETY... protect yourself against eye injury.
Wear safety glasses when using punches, chisels

(26) Rolling Wedge Bar. With a 90° polished rolling head... gives good leverage. Pointed end for lining up work. Overall, bar measures 16 inches long with a ½-in. diam.
ORDERING INFO:
Shpg. wt. 1 lb. 7 oz.
9 GT 42892 \$6.49

(27) Extra-long Cold Chisels. Cuts bolts and rivets. Meet Federal Specifications GGG-P-313b for strength.
SIZES, ORDER INFO:
¾x12 in. Wt. 13 oz.
9 GT 42991 \$2.79
¾x18 inches.
Shpg. wt. 1 lb. 4 oz.
9 GT 42992 \$3.99
¾x12 inches.
Shpg. wt. 1 lb. 4 oz.
9 GT 42993 \$3.99

(28) Center Punches. Mark points for drill holes. Meet Federal Specifications GGG-P-831e for size and strength.
SIZES, ORDER INFO:
¾x4½ in. Wt. 3 oz.
9 GT 42861 \$1.29
¾x6 in. Wt. 6 oz.
9 GT 42862 \$1.79

(29) Pin Punches. Drive out pins, bolts. Meet Fed. Specs. GGG-P-831e. Not for impact use.
SIZES AND ORDERING INFO:

Catalog Number	Point Size	Length	Wt. oz.	Each
9 GT 42881	¼ in.	4½ in.	4	\$1.49
9 GT 42882	⅝ in.	4½ in.	4	1.49
9 GT 42883	¾ in.	4½ in.	3	1.49
9 GT 42884	1 in.	5½ in.	4	1.49
9 GT 42885	1½ in.	5½ in.	5	1.49
9 GT 42886	2 in.	5½ in.	6	1.49

(30) Line-up Tools. Hardened ends. Meet Federal Specifications GGG-P-831e. Not for impact use.
SIZES AND ORDERING INFO:

Catalog No.	Size (in.)	Shpg. wt.	Each
9 GT 42901	½x3½x7	6 oz.	\$1.99
9 GT 42902	½x4½x9	8 oz.	2.39
9 GT 42903	½x5½x12	1 lb. 4 oz.	3.19
9 GT 42904	½x6½x15	1 lb.	2.89

(31) Standard-length Cold Chisels. Meet or exceed Federal Specifications GGG-313b for strength.
SIZES AND ORDERING INFO:

Catalog Number	Edge (in.)	Stock (in.)	Length (in.)	Wt. oz.	Each
9 GT 42971	¼	¾	4½	4	\$1.39
9 GT 42972	½	¾	5½	4	1.59
9 GT 42973	¾	¾	6	6	1.79
9 GT 42974	1	¾	6½	8	1.99
9 GT 42975	1½	¾	7	12	2.39
9 GT 42976	2	¾	7½	16	2.99

(32) Pry Bar. 16 in. long. ½-in. stock.
ORDERING INFORMATION:
9 GT 4283—Wt. 1 lb. 1 oz. \$3.27

(33) CRAFTSMAN Hand Impact Driver. Loosen or tighten frozen nuts, screws, bolts. No electric or air power needed... just strike driver with hammer (not included). Each impact turns bit up to 20°. Can also be used with any ½-inch square drive regular or deep impact socket.
SET INCLUDES: ½-inch square drive tool with adapter, Nos. 2 and 4 Phillips bits, ½ and ¾-in. straight-slotted bits, plastic storage pouch.
ORDERING INFORMATION: Order replacement bits below.
9 GT 47634—Shipping weight 2 pounds 1 ounce..... Set \$13.77

Replacement Bits for Hand Impact Driver above.

TYPES AND ORDERING INFORMATION: Shpg. wt. each 3 oz.

9 GT 47631—No. 1 Phillips Bit	79c
9 GT 47635—No. 2 Phillips Bit	79c
9 GT 47632—No. 3 Phillips Bit	79c
9 GT 47636—No. 4 Phillips Bit	79c
9 GT 47637—½-inch Straight-slotted Bit	99c
9 GT 47638—½-inch Straight-slotted Bit	\$2.29

(34) CRAFTSMAN Universal Nut Cracker. A few turns of a hand wrench and it splits rusted and corroded nuts up to ¾ inch across flats without damage to the threads. Forged, 4½-inch alloy steel frame; hardened cutter.
ORDERING INFORMATION:
9 GT 4772—Shipping weight 15 ounces \$9.97
9 GT 4773—Replacement Cutter. Shipping wt. 3 oz. 2.29



COMPKR
LAEGJD

Sears 49

QUICK-RELEASE RATCHET WRENCHES WITH TEST-PROVEN DURABILITY

Like all of our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Test results prove these Ratchets are outstanding:

In actual lab tightening tests, ratchets like these were operated over 1/2 million times without serious wear. They're tough to break because they're made tough:

- CRAFTSMAN Ratchets are drop-forged. This drop-forging process increases the strength of our ratchets at points of greatest stress
- CRAFTSMAN Ratchets are made from a select molybdenum alloy steel . . . specially chosen for its overall strength and ability to resist brittleness when tempered. This alloy gives our ratchets the toughness needed to loosen stubborn nuts and bolts
- CRAFTSMAN Ratchets have quick-release buttons so even tight, greasy sockets slip off easily . . . no hard pulling or prying
- CRAFTSMAN Ratchets are heat treated, then oil-quenched and tempered to uniformly "through-harden" them
- CRAFTSMAN Ratchets are nickel-chrome plated to add rust and corrosion resistance . . . you'll get tough tools with a bright finish

YOU'LL NEVER HAVE TO PAY FOR REPLACING A CRAFTSMAN RATCHET
WE BACK THEM ALL WITH OUR FAMOUS FULL UNLIMITED WARRANTY
(See warranty on following page)

Fine-tooth Ratchet
is great for fast work in tight places because a handle movement of only 4° will turn a socket

Low as **\$849** 1/2-inch sq. drive

Flex-head Ratchet
adjusts from 0° to 90° for easier operation at hard-to-work angles

Low as **\$1179** 3/8-inch sq. drive

Regular-head Ratchet

Low as **\$599**

1/4-in. sq. drive

(1 thru 3) Quick-release, reversible Ratchets

CONSTRUCTION: Drop-forged molybdenum alloy steel. Nickel-chrome plating adds rust and corrosion resistance. In lab tightening tests, CRAFTSMAN ratchets were operated by a machine exerting pressure on each stroke over 1/2 million times without serious wear.

(1) Fine-tooth Ratchet Wrenches
RELEASE, REVERSING CONTROLS: Quick-release button (A) releases sockets instantly. Reversing lever (B) changes ratchet direction instantly. Knurled speeder (C) for rapid spin down of nuts and bolts.

SIZES, ORDER INFO: See warranty, p. 51.

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 43178	1/4-in.	5 1/4	70	6	\$8.49
9 GT 43788	3/8-in.	6 7/8	82	11	\$11.19
9 GT 44978	1/2-in.	10 1/4	90	17	\$14.29

(2) Flex-head Ratchet Wrenches
RELEASE, REVERSING CONTROLS: Quick-release button (A) releases sockets instantly, even tight or greasy ones. Reversing lever (B) changes ratchet direction instantly.

SIZES, ORDERING INFORMATION: See warranty on page 51.

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 42791	3/8-inch	11 1/4	24	1 2	\$11.79
9 GT 44974	1/2-inch	16 1/4	32	2 4	\$15.99

(3) Regular-head Ratchet Wrenches

RELEASE, REVERSING CONTROLS: Quick-release button (A). Reversing lever (B).

SIZES, ORDERING INFO: See warranty on page 51. See page 54 for 1-in. sq. drive ratchets.

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 43175	1/4-in.	5 1/4	24	6	\$5.99
9 GT 43785	3/8-in.	6 7/8	24	11	\$8.49
9 GT 44975	1/2-in.	10 1/4	32	16	\$11.29

Catalog Number	Square drive	Length inches	Number of teeth	Wt. lbs. oz.	Each
9 GT 44976	1/2-in.	15	32	1 13	\$13.29
9 GT 44801	3/4-in.	19 1/4	24	5 11	\$32.99

CRAFTSMAN® Hex Key Wrenches

CONSTRUCTION: Steel with rust-resistant finish. Chamfered ends slide into set screws quickly. Wrench sizes stamped into shanks. Can be used at either end. Sets include plastic storage pouch. Professional quality.

STD. Short-arm Wrenches

SIZES, ORDER INFO: See warranty on next page.

Catalog No.	Size, in.	Wt.	Each
9 GT 28131	.050	1 oz.	25c
9 GT 28132	1/16	1 oz.	25c
9 GT 28133	3/32	1 oz.	25c
9 GT 28134	1/8	1 oz.	25c
9 GT 28182	3/32	1 oz.	25c
9 GT 28183	1/4	1 oz.	25c
9 GT 28181	5/16	1 oz.	25c
9 GT 28136	3/16	1 oz.	25c
9 GT 28137	1/2	2 oz.	25c
9 GT 28138	3/4	2 oz.	25c
9 GT 28139	1	2 oz.	25c

STANDARD Long-arm Wrenches

SIZES, ORDERING INFO: See warranty on next page.

Catalog No.	Size, in.	Wt.	Each
9 GT 28181	3/4	1 oz.	25c
9 GT 28171	3/32	1 oz.	25c
9 GT 28185	1/4	1 oz.	25c
9 GT 28172	1/8	1 oz.	25c
9 GT 28186	5/16	1 oz.	25c
9 GT 28173	3/32	2 oz.	25c
9 GT 28174	1/2	2 oz.	25c
9 GT 28175	3/32	3 oz.	39c
9 GT 28176	1/4	3 oz.	39c
9 GT 28177	5/16	5 oz.	69c
9 GT 28178	3/8	7 oz.	79c
9 GT 28179	1/2	12 oz.	\$1.49

(4) 14-piece STANDARD Short/Long-arm Set

SHORT-ARM SIZES: .050, 1/16, 3/32, 1/8, 1/4, 5/16, 3/8, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2, 2 1/2, 3, 4, 5, 6, 7, 8, 9, 10mm.

LONG-ARM SIZES: 3/64, 1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 7/8, 1, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/4, 3 1/2, 4, 4 1/4, 4 1/2, 5, 5 1/4, 5 1/2, 6, 6 1/4, 6 1/2, 7, 7 1/4, 7 1/2, 8, 8 1/4, 8 1/2, 9, 9 1/4, 9 1/2, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 354, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382, 384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462, 464, 466, 468, 470, 472, 474, 476, 478, 480, 482, 484, 486, 488, 490, 492, 494, 496, 498, 500, 502, 504, 506, 508, 510, 512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 616, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 854, 856, 858, 860, 862, 864, 866, 868, 870, 872, 874, 876, 878, 880, 882, 884, 886, 888, 890, 892, 894, 896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974, 976, 978, 980, 982, 984, 986, 988, 990, 992, 994, 996, 998, 1000, 1002, 1004, 1006, 1008, 1010, 1012, 1014, 1016, 1018, 1020, 1022, 1024, 1026, 1028, 1030, 1032, 1034, 1036, 1038, 1040, 1042, 1044, 1046, 1048, 1050, 1052, 1054, 1056, 1058, 1060, 1062, 1064, 1066, 1068, 1070, 1072, 1074, 1076, 1078, 1080, 1082, 1084, 1086, 1088, 1090, 1092, 1094, 1096, 1098, 1100, 1102, 1104, 1106, 1108, 1110, 1112, 1114, 1116, 1118, 1120, 1122, 1124, 1126, 1128, 1130, 1132, 1134, 1136, 1138, 1140, 1142, 1144, 1146, 1148, 1150, 1152, 1154, 1156, 1158, 1160, 1162, 1164, 1166, 1168, 1170, 1172, 1174, 1176, 1178, 1180, 1182, 1184, 1186, 1188, 1190, 1192, 1194, 1196, 1198, 1200, 1202, 1204, 1206, 1208, 1210, 1212, 1214, 1216, 1218, 1220, 1222, 1224, 1226, 1228, 1230, 1232, 1234, 1236, 1238, 1240, 1242, 1244, 1246, 1248, 1250, 1252, 1254, 1256, 1258, 1260, 1262, 1264, 1266, 1268, 1270, 1272, 1274, 1276, 1278, 1280, 1282, 1284, 1286, 1288, 1290, 1292, 1294, 1296, 1298, 1300, 1302, 1304, 1306, 1308, 1310, 1312, 1314, 1316, 1318, 1320, 1322, 1324, 1326, 1328, 1330, 1332, 1334, 1336, 1338, 1340, 1342, 1344, 1346, 1348, 1350, 1352, 1354, 1356, 1358, 1360, 1362, 1364, 1366, 1368, 1370, 1372, 1374, 1376, 1378, 1380, 1382, 1384, 1386, 1388, 1390, 1392, 1394, 1396, 1398, 1400, 1402, 1404, 1406, 1408, 1410, 1412, 1414, 1416, 1418, 1420, 1422, 1424, 1426, 1428, 1430, 1432, 1434, 1436, 1438, 1440, 1442, 1444, 1446, 1448, 1450, 1452, 1454, 1456, 1458, 1460, 1462, 1464, 1466, 1468, 1470, 1472, 1474, 1476, 1478, 1480, 1482, 1484, 1486, 1488, 1490, 1492, 1494, 1496, 1498, 1500, 1502, 1504, 1506, 1508, 1510, 1512, 1514, 1516, 1518, 1520, 1522, 1524, 1526, 1528, 1530, 1532, 1534, 1536, 1538, 1540, 1542, 1544, 1546, 1548, 1550, 1552, 1554, 1556, 1558, 1560, 1562, 1564, 1566, 1568, 1570, 1572, 1574, 1576, 1578, 1580, 1582, 1584, 1586, 1588, 1590, 1592, 1594, 1596, 1598, 1600, 1602, 1604, 1606, 1608, 1610, 1612, 1614, 1616, 1618, 1620, 1622, 1624, 1626, 1628, 1630, 1632, 1634, 1636, 1638, 1640, 1642, 1644, 1646, 1648, 1650, 1652, 1654, 1656, 1658, 1660, 1662, 1664, 1666, 1668, 1670, 1672, 1674, 1676, 1678, 1680, 1682, 1684, 1686, 1688, 1690, 1692, 1694, 1696, 1698, 1700, 1702, 1704, 1706, 1708, 1710, 1712, 1714, 1716, 1718, 1720, 1722, 1724, 1726, 1728, 1730, 1732, 1734, 1736, 1738, 1740, 1742, 1744, 1746, 1748, 1750, 1752, 1754, 1756, 1758, 1760, 1762, 1764, 1766, 1768, 1770, 1772, 1774, 1776, 1778, 1780, 1782, 1784, 1786, 1788, 1790, 1792, 1794, 1796, 1798, 1800, 1802, 1804, 1806, 1808, 1810, 1812, 1814, 1816, 1818, 1820, 1822, 1824, 1826, 1828, 1830, 1832, 1834, 1836, 1838, 1840, 1842, 1844, 1846, 1848, 1850, 1852, 1854, 1856, 1858, 1860, 1862, 1864, 1866, 1868, 1870, 1872, 1874, 1876, 1878, 1880, 1882, 1884, 1886, 1888, 1890, 1892, 1894, 1896, 1898, 1900, 1902, 1904, 1906, 1908, 1910, 1912, 1914, 1916, 1918, 1920, 1922, 1924, 1926, 1928, 1930, 1932, 1934, 1936, 1938, 1940, 1942, 1944, 1946, 1948, 1950, 1952, 1954, 1956, 1958, 1960, 1962, 1964, 1966, 1968, 1970, 1972, 1974, 1976, 1978, 1980, 1982, 1984, 1986, 1988, 1990, 1992, 1994, 1996, 1998, 2000, 2002, 2004, 2006, 2008, 2010, 2012, 2014, 2016, 2018, 2020, 2022, 2024, 2026, 2028, 2030, 2032, 2034, 2036, 2038, 2040, 2042, 2044, 2046, 2048, 2050, 2052, 2054, 2056, 2058, 2060, 2062, 2064, 2066, 2068, 2070, 2072, 2074, 2076, 2078, 2080, 2082, 2084, 2086, 2088, 2090, 2092, 2094, 2096, 2098, 2100, 2102, 2104, 2106, 2108, 2110, 2112, 2114, 2116, 2118, 2120, 2122, 2124, 2126, 2128, 2130, 2132, 2134, 2136, 2138, 2140, 2142, 2144, 2146, 2148, 2150, 2152, 2154, 2156, 2158, 2160, 2162, 2164, 2166, 2168, 2170, 2172, 2174, 2176, 2178, 2180, 2182, 2184, 2186, 2188, 2190, 2192, 2194, 2196, 2198, 2200, 2202, 2204, 2206, 2208, 2210, 2212, 2214, 2216, 2218, 2220, 2222, 2224, 2226, 2228, 2230, 2232, 2234, 2236, 2238, 2240, 2242, 2244, 2246, 2248, 2250, 2252, 2254, 2256, 2258, 2260, 2262, 2264, 2266, 2268, 2270, 2272, 2274, 2276, 2278, 2280, 2282, 2284, 2286, 2288, 2290, 2292, 2294, 2296, 2298, 2300, 2302, 2304, 2306, 2308, 2310, 2312, 2314, 2316, 2318, 2320, 2322, 2324, 2326, 2328, 2330, 2332, 2334, 2336, 2338, 2340, 2342, 2344, 2346, 2348, 2350, 2352, 2354, 2356, 2358, 2360, 2362, 2364, 2366, 2368, 2370, 2372, 2374, 2376, 2378, 2380, 2382, 2384, 2386, 2388, 2390, 2392, 2394, 2396, 2398, 2400, 2402, 2404, 2406, 2408, 2410, 2412, 2414, 2416, 2418, 2420, 2422, 2424, 2426, 2428, 2430, 2432, 2434, 2436, 2438, 2440, 2442, 2444, 2446, 2448, 2450, 2452, 2454, 2456, 2458, 2460, 2462, 2464, 2466, 2468, 2470, 2472, 2474, 2476, 2478, 2480, 2482, 2484, 2486, 2488, 2490, 2492, 2494, 2496, 2498, 2500, 2502, 2504, 2506, 2508, 2510, 2512, 2514, 2516, 2518, 2520, 2522, 2524, 2526, 2528, 2530, 2532, 2534, 2536, 2538, 2540, 2542, 2544, 2546, 2548, 2550, 2552, 2554, 2556, 2558, 2560, 2562, 2564, 2566, 2568, 2570, 2572, 2574, 2576, 2578, 2580, 2582, 2584, 2586, 2588, 2590, 2592, 2594, 2596, 2598, 2600, 2602, 2604, 2606, 2608, 2610, 2612, 2614, 2616, 2618, 2620, 2622, 2624, 2626, 2628, 2630, 2632, 2634, 2636, 2638, 2640, 2642, 2644, 2646, 2648, 2650, 2652, 2654, 2656, 2658, 2660, 2662, 2664, 2666, 2668, 2670, 2672, 2674, 2676, 2678, 2680, 2682, 2684, 2686, 2688, 2690, 2692, 2694, 2696, 2698, 2700, 2702, 2704, 2706, 2708, 2710, 2712, 2714, 2716, 2718, 2720, 2722, 2724, 2726, 2728, 2730, 2732, 2734, 2736, 2738, 2740, 2742, 2744, 2746, 2748, 2750, 2752, 2754, 2756, 2758, 2760, 2762, 2764, 2766, 2768, 2770, 2772, 2774, 2776, 2778, 2780, 2782, 2784, 2786, 2788, 2790, 2792, 2794, 2796, 2798, 2800, 2802, 2804, 2806, 2808, 2810, 2812, 2814, 2816, 2818, 2820, 2822, 2824, 2826, 2828

CRAFTSMAN® Torque Wrenches with STANDARD and METRIC calibrations

(15) Heavy-duty Wrench with direct-reading dial

Measures up to 250 ft.-lbs. or
34.5 meter-kilograms torque **\$59.50**

CONSTRUCTION: Chrome-plated steel slim-drive end with high-leverage extension. 1/2-inch square drive for tough, industrial applications. Reversible. Direct-reading dial shows measurement in either direction. Memory pointer shows highest torque reached until reset to zero. 2 1/2-inch dial has plastic lens. Includes protective case and instructions.

TORQUE RANGE: Measures from 0 to 250 ft.-lbs. or 34.5 meter-kilograms torque.

ORDERING INFORMATION: See warranty at bottom of page. All torque wrenches require recalibration periodically.

9 GT 44442—Shpg. wt. 7 lbs. 7 oz. \$59.50

(16) Micro-adjusting Wrench lets you pre-set torque

Measures up to 150 ft.-lbs. or
20.7 meter-kilograms torque **\$44.50**

CONSTRUCTION: Chrome-plated steel with texture-grip handle. Push-button releases socket instantly. 1/2-inch square drive. Reversible... lever changes directions. Patented snap-lock holds setting. Sealed mechanism. No gauges... easy to use in blind spots or on vibrating machinery... clicks when torque you pre-set is reached.

TORQUE RANGE: Measures from 10 to 150 ft.-lbs. or 20.7 meter-kilograms torque.

CRAFTSMAN MICRO-ADJUSTING TORQUE WRENCH FULL 90 DAY WARRANTY: If, within 90 days from the date of purchase, this Torque Wrench fails because of a defect in material or workmanship, we will repair and/or recalibrate it free of charge.

LIMITED WARRANTY: After 90 days and until one year from the date of purchase, we will repair any defects in material or workmanship in the Torque Wrench free of charge. This warranty does not include recalibration.

Service under these warranties is available by simply returning the Torque Wrench to any Sears store throughout the United States.

ORDERING INFORMATION: All torque wrenches require recalibration periodically.

9 GT 44443—Shpg. wt. 4 lbs. 9 oz. \$44.50

Polyethylene Case for CRAFTSMAN Micro-adjusting Torque Wrench. (Not shown.)

ORDERING INFORMATION:
9 GT 44462—Wt. 1 lb. 14 oz. \$4.99

(17) Beam-type Wrenches in three torque ranges

Low as **\$12.77** 0 to 600 in.-lbs. or
0 to 6.9 meter-kilograms

CONSTRUCTION: Chrome-plated steel with nylon handle that pivots for best work angle. Guide charts. Measures in both directions.

TORQUE RANGES AND ORDERING INFORMATION: See warranty below. All torque wrenches require recalibration periodically.

0 to 600 in.-lbs. or 0 to 6.9 meter-kilograms torque with 3/8-inch square drive.

9 GT 44643—Shpg. wt. 1 lb. 12 oz. \$12.77

0 to 100 ft.-lbs. or 0 to 13.8 meter-kilograms torque with 1/2-inch square drive.

9 GT 44481—Shpg. wt. 2 lbs. 4 oz. \$14.77

0 to 150 ft.-lbs. or 0 to 20.7 meter-kilograms torque with 1/2-inch square drive.

9 GT 44641—Shpg. wt. 2 lbs. 5 oz. \$16.87

CRAFTSMAN® HAND TOOL FULL UNLIMITED WARRANTY

If any CRAFTSMAN Hand Tool fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement

(1 thru 14) CRAFTSMAN® Ratchet Wrench Accessories

(1 thru 5)
CONSTRUCTION: Molybdenum alloy steel. Nickel-chrome plating resists rust.

(1) Ell Handles.

Use with spark plug sockets.

SIZES, ORDERING INFORMATION:
See warranty below, right.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 4318	3/8-in.	7 in.	9 oz.	\$2.69
9 GT 4402	1/2-in.	8 in.	15 oz.	3.19

(2) Speeder Wrenches

SIZES, ORDERING INFORMATION:
See warranty below, right.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 4281	1/4-in.	15 1/2 in.	10 oz.	\$4.49
9 GT 4427	3/8-in.	16 in.	1 lb. 4 oz.	5.69
9 GT 4416	1/2-in.	18 in.	2 lbs. 1 oz.	6.99

*No center grip. †With rotating center grip

(3) Flex Handles

Hinged-joint lets you work at any angle. Positive stops at 0° and 45°.

SIZES, ORDERING INFORMATION:
See warranty below, right.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 43523	1/4-in.	6 in.	5 oz.	\$3.19
9 GT 44363	3/8-in.	10 in.	14 oz.	5.99
9 GT 44201	1/2-in.	15 in.	1 lb. 10 oz.	7.49
9 GT 44202	1/2-in.	18 in.	1 lb. 15 oz.	9.19
9 GT 4431	3/4-in.	18 in.	3 lbs.	13.79

(4) Extension Bars

Lock on to ratchet. Permits use of ratchet when there's only room for the socket. Added length eases work in tight places.

SIZES, ORDER INFO: See warranty below, right. See page 54 for 1-inch square drive extension bars.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 43538	1/4-in.	1 1/2 in.	1 oz.	\$1.79
9 GT 43539	1/4-in.	3 in.	3 oz.	2.09
9 GT 43531	3/8-in.	6 in.	4 oz.	2.29
9 GT 43532	1/2-in.	14 in.	7 oz.	4.19
9 GT 43537	3/4-in.	1 1/2 in.	2 oz.	1.99
9 GT 44264	3/8-in.	3 in.	4 oz.	2.39
9 GT 44261	1/2-in.	6 in.	6 oz.	3.19
9 GT 44262	3/4-in.	10 in.	9 oz.	3.59
9 GT 44263	1/2-in.	20 in.	1 lb.	5.99
9 GT 43522	1/2-in.	2 in.	6 oz.	2.39
9 GT 44133	1/2-in.	3 in.	6 oz.	2.89
9 GT 44131	1/2-in.	6 in.	9 oz.	3.39
9 GT 44132	1/2-in.	10 in.	13 oz.	4.39
9 GT 44134	1/2-in.	20 in.	1 lb. 7 oz.	6.49
9 GT 4440	3/4-in.	5 in.	1 lb. 1 oz.	5.49
9 GT 4441	3/4-in.	8 in.	1 lb. 8 oz.	6.49
9 GT 4442	3/4-in.	16 in.	2 lbs. 14 oz.	8.99

(5) Slide-bar Handles

Use as "T" or "L" handle to loosen stubborn connections.

SIZES, ORDERING INFORMATION:
See warranty at right.

Catalog Number	Square drive	Length	Shipping weight	Each
9 GT 4354	1/4-in.	4 1/2 in.	4 oz.	\$2.99
9 GT 4428	3/8-in.	7 in.	10 oz.	3.79
9 GT 44152	1/2-in.	9 in.	1 lb.	4.19
9 GT 44151	1/2-in.	15 in.	1 lb. 6 oz.	6.59
9 GT 4443	3/4-in.	18 in.	4 lbs.	8.99

(6 thru 9)

CONSTRUCTION: Molybdenum alloy steel. Nickel-chrome plating resists rust.

(6) Universal Joints

Swing 90°. Square drive.

SIZES, ORDERING INFORMATION:
See warranty below, right.

Catalog No.	Size	Shpg. wt.	Each
9 GT 4280	1/4-in.	3 oz.	\$4.39
9 GT 4435	3/8-in.	4 oz.	4.69
9 GT 4425	1/2-in.	7 oz.	4.69

(7) Socket Adapters

Change square drive size to another.

SIZES, ORDERING INFORMATION:
See warranty below, right.

Catalog Number	Drive size	Converts to	Wt. oz.	Each
9 GT 4256	3/8-in.	1/4-in.	3	\$1.99
9 GT 4257	1/2-in.	3/8-in.	3	1.89
9 GT 4258	3/4-in.	1/2-in.	4	2.19
9 GT 4259	1/2-in.	3/4-in.	4	2.29
9 GT 4271	1/2-in.	3/4-in.	6	3.19

(8) Crowfoot Wrenches. Use with 3/8-in. sq. drive. For tight places.

SIZES, ORDERING INFORMATION:
See warranty below, right.

9 GT 43611	3/8-in.	Wt. 3 oz.	\$2.49
9 GT 43621	1/2-in.	Wt. 3 oz.	2.59
9 GT 43622	3/4-in.	Wt. 3 oz.	2.79
9 GT 43623	1/2-in.	Wt. 3 oz.	2.89
9 GT 43624	3/8-in.	Wt. 4 oz.	3.09
9 GT 43625	1/2-in.	Wt. 4 oz.	3.19
9 GT 43626	3/4-in.	Wt. 4 oz.	3.29
9 GT 43627	1/2-in.	Wt. 4 oz.	3.59
9 GT 43628	3/4-in.	Wt. 5 oz.	3.89
9 GT 43629	1-in.	Wt. 6 oz.	3.99

(9) Stud Remover. Capacity of 5/16 to 3/4-in. 1/2-inch square drive.

ORDERING INFO: See warranty below.
9 GT 4457—Wt. 14 oz. \$8.49

(10) Flex Extension. Flexible cable.

1/4-inch square drive. 4 in. long.

ORDERING INFO: See warranty below.
9 GT 4336—Wt. 3 oz. \$2.99

(11) Ratchet Speeder Adapters

Steel with rust-resistant finish. Fit between ratchet and socket. Set of three for 1/4, 3/8 and 1/2-inch square drive ratchets. With plastic pouch.

ORDERING INFO: See warranty below.
9 GT 44191—Wt. 4 oz. Set \$2.99

(12) Handle Extension

1/4-inch square drive. 4 1/2 inches long. Plastic handle.

ORDERING INFO: See warranty at right.
9 GT 43351—Wt. 5 oz. \$2.59

(13) Socket Extension


For 1/4-inch sq. drive. 1/4-in. female socket in top of plastic handle. 6 in. long.

ORDERING INFO: See warranty at right.
9 GT 43371—Wt. 6 oz. \$2.99

(14) 6-inch Flex Spinner

For 1/4-in. sq. drive sockets and fittings. Flexible steel cable. Plastic handle.

ORDERING INFO: See warranty at right.
9 GT 4355—Wt. 5 oz. \$4.19

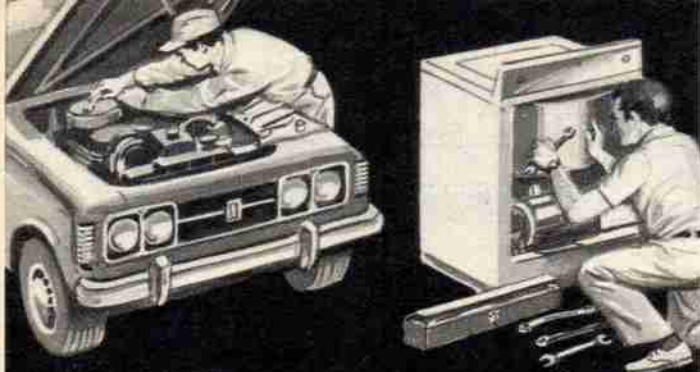

**SPEED
LIMIT
90
KPH**

**The United States
is on the road to
METRICATION**



On December 23, 1975, the President signed into law the Metric Conversion Act of 1975. This act demonstrates a national commitment to a coordinated metric changeover.

Already, many major U.S. industries are producing goods with metric fasteners. More than 11 million cars on our nation's highways require metric tools for repairs. In the past, most of these cars were imports. But the major U. S. automakers are beginning to implement their metrication programs. Soon your car may need metric tools for servicing.

Today, we're in a period of transition... both standard and metric tools may be needed at the same time. To help you through this transition, Sears is expanding its CRAFTSMAN® metric tool selection. In this catalog you'll find METRIC Tap and Die Sets on pages 44 and 45, METRIC Sockets on pages 52 thru 54, METRIC Wrenches on pages 55 thru 57, METRIC Socket Wrench Sets on pages 58 and 59, METRIC Socket and Wrench Sets on page 60, and METRIC Mechanics' Tool Sets on pages 61, 68 and 69.

Whether you're working on your car, bike, or repairing an appliance, CRAFTSMAN® Tools will be ready to help see you through the job... they have been for 50 years.

Make Sears Your METRIC HEADQUARTERS

CRAFTSMAN® SOCKETS FULL UNLIMITED WARRANTY

If any CRAFTSMAN Socket fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement.

Choose 6, 8, or 12-pt. Sockets

6-POINT: Use on hex nuts and bolts. Heavier walls. Grip rounded corners.

8-POINT: For square nuts only (farm machinery and equipment). A must for farm mechanics.

12-POINT: For use on standard hex nuts and cap screws. More turning positions than 6 or 8-point sockets.



1/4-inch Square Drive



Regular-depth



Deep

STANDARD and METRIC-SIZE Sets

10-piece Standard-size Sets... choose regular-depth or deep.

SET COMPOSITION: Nine 6-pt. sockets (3/16, 1/8, 9/32, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2-inch); metal tray

DEPTH, ORDER INFO: See warranty above, construction features p. 53.

Regular-depth.

9 GT 44453—Wt. 8 oz.Set \$8.99

Deep. Separate prices total \$16.11.

9 GT 44454—Wt. 14 oz.Set \$12.99

10-piece METRIC-size Sets... choose regular-depth or deep.

SET COMPOSITION: Nine 6-point sockets (4, 5, 6, 7, 8, 9, 10, 11 and 12mm); metal tray

DEPTH, ORDER INFO: See warranty above, construction features p. 53.

Regular-depth.

9 GT 44455—Wt. 8 oz.Set \$8.99

Deep. Separate prices total \$17.01.

9 GT 44437—Wt. 14 oz.Set \$12.99

Order Individual Sockets from charts below

Standard-size, Regular-depth.

ORDER INFO: See warranty above and construction features p. 53.

Catalog Number	Drive	Inches	Points	Wt. oz.	Each
9 GT 43481	1/4	3/32	6	2	99c
9 GT 43491	1/4	3/16	6	2	99c
9 GT 43492	1/4	7/32	6	2	99c
9 GT 43493	1/4	1/2	6	2	99c
9 GT 43494	1/4	5/16	6	2	99c
9 GT 43495	1/4	11/32	6	2	99c
9 GT 43496	1/4	3/8	6	3	99c
9 GT 43497	1/4	7/16	6	3	99c
9 GT 43498	1/4	1/2	6	3	99c
9 GT 43499	1/4	5/8	12	2	99c
9 GT 43500	1/4	3/4	12	2	99c
9 GT 43501	1/4	7/8	12	2	99c
9 GT 43502	1/4	1	12	2	99c
9 GT 43503	1/4	1 1/8	12	2	99c
9 GT 43504	1/4	1 1/4	12	2	99c
9 GT 43505	1/4	1 1/2	12	2	99c
9 GT 43506	1/4	1 3/4	12	2	99c
9 GT 43507	1/4	2	12	3	99c
9 GT 43508	1/4	2 1/4	12	3	99c
9 GT 43509	1/4	2 1/2	12	3	99c
9 GT 43510	1/4	2 3/4	12	3	99c
9 GT 43511	1/4	3	12	3	99c
9 GT 43512	1/4	3 1/4	12	3	99c
9 GT 43513	1/4	3 1/2	12	3	99c

Standard-size, Deep.

Deep sockets are ideal for getting into hard-to-reach places. Reach nuts with over-protruding bolts like spring "U"-bolts, etc.

ORDER INFO: See warranty above and construction features p. 53.

Catalog Number	Drive	Inches	Points	Wt. oz.	Each
9 GT 43571	1/4	3/16	6	3	\$1.79
9 GT 43572	1/4	7/32	6	3	1.79
9 GT 43573	1/4	1/2	6	3	1.79
9 GT 43574	1/4	5/16	6	3	1.79
9 GT 43575	1/4	11/32	6	3	1.79
9 GT 43576	1/4	3/8	6	3	1.79
9 GT 43577	1/4	7/16	6	3	1.79
9 GT 43578	1/4	1/2	6	3	1.79
9 GT 43579	1/4	5/8	12	3	1.79
9 GT 43580	1/4	3/4	12	3	1.79
9 GT 43581	1/4	7/8	12	3	1.79
9 GT 43582	1/4	1	12	3	1.79
9 GT 43583	1/4	1 1/8	12	3	1.79
9 GT 43584	1/4	1 1/4	12	3	1.79
9 GT 43585	1/4	1 1/2	12	3	1.79
9 GT 43586	1/4	1 3/4	12	3	1.79
9 GT 43587	1/4	2	12	3	1.79
9 GT 43588	1/4	2 1/4	12	3	1.79
9 GT 43589	1/4	2 1/2	12	3	1.79
9 GT 43590	1/4	2 3/4	12	3	1.79
9 GT 43591	1/4	3	12	3	1.79
9 GT 43592	1/4	3 1/4	12	3	1.79
9 GT 43593	1/4	3 1/2	12	3	1.79

Metric-size, Regular-depth.

Be prepared to service products with metric fasteners.

ORDERING INFORMATION: See warranty above and construction features p. 53.

Catalog Number	Drive	Size	Points	Wt. oz.	Each
9 GT 43505	1/4	4mm	6	2	99c
9 GT 43501	1/4	5mm	6	2	99c
9 GT 43502	1/4	6mm	6	2	99c
9 GT 43503	1/4	7mm	6	2	99c
9 GT 43504	1/4	8mm	6	2	99c
9 GT 43507	1/4	9mm	6	2	99c
9 GT 43508	1/4	10mm	6	3	99c
9 GT 43509	1/4	11mm	6	3	99c
9 GT 43513	1/4	12mm	6	3	99c

Metric-size, Deep.

Be prepared to service and repair products with metric fasteners. Deep sockets are ideal for getting into hard-to-reach places. Reach nuts with over-protruding bolts like spring "U"-bolts, etc.

ORDERING INFORMATION: See warranty above and construction features p. 53.

Catalog Number	Drive	Size	Points	Wt. oz.	Each
9 GT 44401	1/4	4mm	6	3	\$1.89
9 GT 44402	1/4	5mm	6	3	1.89
9 GT 44403	1/4	6mm	6	3	1.89
9 GT 44404	1/4	7mm	6	3	1.89
9 GT 44405	1/4	8mm	6	3	1.89
9 GT 44406	1/4	9mm	6	3	1.89
9 GT 44407	1/4	10mm	6	3	1.89
9 GT 44408	1/4	11mm	6	3	1.89
9 GT 44409	1/4	12mm	6	4	1.89
9 GT 44411	1/4	13mm	6	5	1.89
9 GT 44412	1/4	14mm	6	4	1.89



(1) Phillips-type Bits.

SIZES, ORDER INFO: 1/4-inch square drive, 1 1/2-in. long.

9 GT 42681—No. 1. Wt. 3 oz.\$2.79

9 GT 42682—No. 2. Wt. 3 oz.2.79

(2) Slotted Screwdriver Bits.

SIZES, ORDER INFO: 1/4-inch square drive, 1 1/2-in. long.

Shipping weight 3 ounces.

9 GT 42691—.030x1/4-in.\$2.49

9 GT 42692—.039x1/4-in.2.49

(3) Hex Setscrew Bits for Socket Wrenches.

SIZES, ORDER INFO: 1/4-in. sq. drive, 1 1/2 inches long. Wt. 3 oz.

9 GT 42701—3/16-in.\$2.29

9 GT 42702—7/32-in.2.29

9 GT 42703—1/4-in.2.29

3/8-in. Wt. 4 oz.

9 GT 427042.29

1/2-in. Wt. 4 oz.

9 GT 427052.29

SOCKETS IN STANDARD OR METRIC SIZES

See 1/2, 3/4 and 1-inch sq. drive on next page

3/8-inch Square Drive



STANDARD and METRIC-SIZE Sets

9-piece Standard-size Sets . . . choose 6 or 12-point openings

SET COMPOSITION: Eight sockets (3/16, 1/4, 5/16, 3/8, 11/16, 1/2, 13/16-inch); metal tray.

ORDER INFO: See warranty p. 52, construction features at right. *Separate prices total \$12.02.*

9-pc. Set with 6-pt. openings.

9 GT 44456—Wt. 1 lb.Set \$10.99

9-pc. Set with 12-pt. openings.

9 GT 4389—Wt. 1 lb.Set \$10.99

10-piece DEEP Standard-size Set.

SET COMPOSITION: Nine 6-pt. sockets (3/16, 1/4, 5/16, 3/8, 11/16, 1/2, 13/16, 7/8-inch); metal tray.

ORDER INFO: See warranty p. 52, construction features at right. *Separate prices total \$20.61.*

9 GT 43156—Wt. 2 lbs. 4 oz. . . .Set \$16.99

9-piece METRIC-size Sets . . . choose 6 or 12-point openings

SET COMPOSITION: Eight sockets (sizes 9, 10, 12, 13, 14, 15, 17 and 19mm); metal tray.

ORDER INFO: See warranty p. 52, construction features at right. *Separate prices total \$12.92.*

9-pc. Set with 6-pt. openings.

9 GT 4342—Wt. 13 oz.Set \$11.99

9-pc. Set with 12-pt. openings.

9 GT 4347—Wt. 13 oz.Set \$10.99

10-piece DEEP METRIC-size Set.

SET COMPOSITION: Nine 6-point sockets (sizes 9, 10, 11, 12, 13, 14, 15, 17 and 19mm); metal tray.

ORDER INFO: See warranty p. 52, construction features at right. *Separate prices total \$22.01.*

9 GT 44438—Wt. 1 lb. 13 oz. . . .Set \$16.99

Order Individual Sockets from charts below

Standard-size, Regular-depth.

ORDER INFO: See warranty p. 52, construction features above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 43001	3/8	3/16	6	3 oz.	\$1.39
9 GT 43002	3/8	1/4	6	3 oz.	1.39
9 GT 43003	3/8	5/16	6	3 oz.	1.39
9 GT 43004	3/8	3/8	6	3 oz.	1.49
9 GT 43005	3/8	7/16	6	3 oz.	1.59
9 GT 43006	3/8	1/2	6	4 oz.	1.59
9 GT 43007	3/8	5/8	6	4 oz.	1.59
9 GT 43008	3/8	3/4	6	4 oz.	1.59
9 GT 44341	3/8	1/4	8	3 oz.	1.49
9 GT 44342	3/8	5/16	8	3 oz.	1.49
9 GT 44343	3/8	3/8	8	3 oz.	1.49
9 GT 44344	3/8	7/16	8	3 oz.	1.49
9 GT 44345	3/8	1/2	8	3 oz.	1.49
9 GT 44331	3/8	1/2	12	3 oz.	1.39
9 GT 44332	3/8	5/8	12	3 oz.	1.39
9 GT 44333	3/8	3/4	12	3 oz.	1.39
9 GT 44334	3/8	7/8	12	3 oz.	1.49
9 GT 44335	3/8	1	12	3 oz.	1.59
9 GT 44336	3/8	1 1/16	12	4 oz.	1.59
9 GT 44337	3/8	1 1/8	12	4 oz.	1.59
9 GT 44338	3/8	1 1/4	12	4 oz.	1.59

Standard-size, Deep.

Deep sockets are ideal for spark plugs, Spring "U"-bolts, etc. Reach nuts with over protruding bolts.

ORDER INFO: See warranty p. 52, construction features above.

Catalog No.	Drive	Inches	Points	Wt.	Each
9 GT 43301	3/8	3/8	12	4 oz.	\$1.79
9 GT 43311	3/8	7/16	12	4 oz.	1.89
9 GT 43312	3/8	1/2	12	4 oz.	1.99
9 GT 43313	3/8	5/8	12	4 oz.	2.29
9 GT 43314	3/8	3/4	12	5 oz.	2.29
9 GT 43315	3/8	7/8	12	5 oz.	2.39
9 GT 43317	3/8	1	12	5 oz.	2.49
9 GT 43318	3/8	1 1/8	12	7 oz.	2.69
9 GT 43319	3/8	1 1/4	12	7 oz.	2.79
9 GT 43333	3/8	3/8	6	4 oz.	1.79
9 GT 43331	3/8	7/16	6	4 oz.	1.89
9 GT 43332	3/8	1/2	6	4 oz.	1.99
9 GT 43334	3/8	5/8	6	4 oz.	2.29
9 GT 43335	3/8	3/4	6	5 oz.	2.29
9 GT 43336	3/8	7/8	6	5 oz.	2.39
9 GT 43337	3/8	1	6	6 oz.	2.49
9 GT 43338	3/8	1 1/8	6	7 oz.	2.69
9 GT 43339	3/8	1 1/4	6	8 oz.	2.79

METRIC-size, Regular-depth.

ORDERING INFO: See warranty page 52, construction features above.

Catalog No.	Drive	Size	Pts.	Wt.	Each
9 GT 43541	3/8	9mm	6	3 oz.	\$1.59
9 GT 43542	3/8	10mm	6	3 oz.	1.59
9 GT 43543	3/8	11mm	6	3 oz.	1.59
9 GT 43544	3/8	12mm	6	3 oz.	1.59
9 GT 43545	3/8	13mm	6	3 oz.	1.59
9 GT 43546	3/8	14mm	6	3 oz.	1.59
9 GT 43547	3/8	15mm	6	3 oz.	1.59
9 GT 43548	3/8	17mm	6	4 oz.	1.69
9 GT 43549	3/8	19mm	6	4 oz.	1.69
9 GT 44301	3/8	9mm	12	3 oz.	1.59
9 GT 44302	3/8	10mm	12	3 oz.	1.59
9 GT 44309	3/8	11mm	12	3 oz.	1.59
9 GT 44303	3/8	12mm	12	3 oz.	1.59
9 GT 44304	3/8	13mm	12	3 oz.	1.59
9 GT 44305	3/8	14mm	12	3 oz.	1.59
9 GT 44306	3/8	15mm	12	3 oz.	1.59
9 GT 44311	3/8	16mm	12	3 oz.	1.59
9 GT 44307	3/8	17mm	12	4 oz.	1.69
9 GT 44312	3/8	18mm	12	4 oz.	1.69
9 GT 44308	3/8	19mm	12	4 oz.	1.69

METRIC-size, DEEP.

ORDERING INFO: See warranty page 52, construction features above.

Catalog No.	Drive	Size	Pts.	Wt.	Each
9 GT 44425	3/8	9mm	6	4 oz.	\$1.99
9 GT 44426	3/8	10mm	6	4 oz.	2.09
9 GT 44427	3/8	11mm	6	4 oz.	2.19
9 GT 44428	3/8	12mm	6	4 oz.	2.29
9 GT 44429	3/8	13mm	6	5 oz.	2.39
9 GT 44431	3/8	14mm	6	5 oz.	2.49
9 GT 44432	3/8	15mm	6	5 oz.	2.69
9 GT 44433	3/8	16mm	6	5 oz.	2.89
9 GT 44434	3/8	17mm	6	5 oz.	2.89
9 GT 44435	3/8	18mm	6	5 oz.	2.99
9 GT 44436	3/8	19mm	6	5 oz.	2.99
9 GT 44413	3/8	9mm	12	4 oz.	1.99
9 GT 44414	3/8	10mm	12	4 oz.	1.99
9 GT 44415	3/8	11mm	12	4 oz.	2.09
9 GT 44416	3/8	12mm	12	4 oz.	2.29
9 GT 44417	3/8	13mm	12	6 oz.	2.39
9 GT 44418	3/8	14mm	12	6 oz.	2.59
9 GT 44419	3/8	15mm	12	5 oz.	2.59
9 GT 44421	3/8	16mm	12	5 oz.	2.79
9 GT 44422	3/8	17mm	12	5 oz.	2.79
9 GT 44423	3/8	18mm	12	5 oz.	2.89
9 GT 44424	3/8	19mm	12	6 oz.	2.99

Like all our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these Sockets so outstanding:

- (A) Chamfered ends allow socket to slide over nuts easily
- (B) No-shoulder design so socket grips nut at full depth
- (C) Molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered for uniform hardness
- (D) Nickel-chrome plating adds rust and corrosion resistance



3/8-inch Square Drive Flexible Sockets



STANDARD and METRIC-SIZE Flexible Socket Sets

8-piece Standard-size Sets . . . choose 6 or 12-pt. openings

Flexible sockets are ideal for getting into hard-to-reach areas.

SET COMPOSITION: Seven sockets (3/16, 1/4, 5/16, 3/8, 11/16, 1/2, 13/16-in.); Permaflex® case.

ORDER INFO: See warranty p. 52, construction features above. *Separate prices total \$32.83.*

8-pc. Set with 6-pt. openings.

9 GT 43811—Wt. 1 lb. 5 oz. . . .Set \$24.99

8-pc. Set with 12-pt. openings.

9 GT 43812—Wt. 1 lb. 5 oz. . . .Set \$24.99

11-piece METRIC-Size Set with 6-point openings

More and more manufacturers are using metric fasteners in their products . . . you'll be ready to repair and service those products with these sockets. Flexible sockets are ideal for getting into hard-to-reach areas.

SET COMPOSITION: Ten 6-pt. sockets (10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm); metal tray.

ORDER INFO: See warranty p. 52, construction features above. *Separate prices total \$46.90.*

9 GT 44459—Wt. 2 lbs. 2 oz. . . .Set \$29.50

Order Individual Flexible Sockets from chart below

Standard-size Flexible Sockets

ORDERING INFORMATION: See warranty p. 52, construction features above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 43252	3/8	3/16	12	4 oz.	\$4.69
9 GT 43253	3/8	1/4	12	4 oz.	4.69
9 GT 43254	3/8	5/16	12	4 oz.	4.69
9 GT 43255	3/8	3/8	12	4 oz.	4.69
9 GT 43256	3/8	7/16	12	4 oz.	4.69
9 GT 43257	3/8	1/2	12	4 oz.	4.69
9 GT 43258	3/8	5/8	12	4 oz.	4.69
9 GT 43261	3/8	3/4	6	4 oz.	4.69
9 GT 43262	3/8	7/8	6	4 oz.	4.69
9 GT 43263	3/8	1	6	4 oz.	4.69
9 GT 43264	3/8	1 1/8	6	4 oz.	4.69
9 GT 43265	3/8	1 1/4	6	4 oz.	4.69
9 GT 43266	3/8	1 1/2	6	4 oz.	4.69
9 GT 43267	3/8	1 3/4	6	4 oz.	4.69

METRIC-size Flexible Sockets

Be ready to repair and service products with metric fasteners.

ORDERING INFORMATION: See warranty page 52, construction features above.

Catalog Number	Drive	Size	Pts.	Shpg. wt.	Each
9 GT 43268	3/8	10mm	6	4 oz.	\$4.69
9 GT 43269	3/8	11mm	6	4 oz.	4.69
9 GT 43271	3/8	12mm	6	4 oz.	4.69
9 GT 43272	3/8	13mm	6	4 oz.	4.69
9 GT 43273	3/8	14mm	6	4 oz.	4.69
9 GT 43274	3/8	15mm	6	4 oz.	4.69
9 GT 43275	3/8	16mm	6	4 oz.	4.69
9 GT 43276	3/8	17mm	6	4 oz.	4.69
9 GT 43277	3/8	18mm	6	4 oz.	4.69
9 GT 43278	3/8	19mm	6	4 oz.	4.69

(4) Phillips-type Bits.

SIZES, ORDER INFO:
2 3/4 inches long. 3/8-in. drive.

9 GT 44371—No. 2. Wt. 4 oz. . . . \$2.89

9 GT 44372—No. 3. Wt. 4 oz. . . . 2.89

9 GT 44373—No. 4. Wt. 4 oz. . . . 2.89

(6) Slotted Screwdriver Bits.

SIZES, ORDER INFO:
1 1/2-in. long. 3/8-in. drive. Wt. 4 oz.

9 GT 42651—0.030-in. . . . \$2.89

9 GT 42652—0.032-in. . . . 2.89

9 GT 42653—0.052-in. . . . 2.89

(5) Hex Setscrew Bits.

SIZES, ORDERING INFORMATION:
1 1/2 inches long. 3/8-in. drive.

9 GT 46661—1/32-in. (Wt. 3 oz.). 1/4-

1/8-in. 3/8-in. (Wt. 4 oz.).

9 GT 46669—1/32-in. . . . \$2.19

9 GT 46661—1/16-in. . . . 2.19

9 GT 46662—1/8-in. . . . 2.19

9 GT 46663—1/4-in. . . . 2.19

9 GT 46664—1/2-in. . . . 2.19

9 GT 46665—3/4-in. . . . 2.19

(7) 3/8-in. drive Spark Plug Sockets

SIZES, ORDER INFO:

1 1/2-in. Wt. 6 oz.

9 GT 43321 \$2.99

3/4-in. Wt. 5 oz.

9 GT 43326 \$2.99

Extra Rubber Insert.

For 1 1/2-in. sockets.

9 GT 44246—Wt. 3 oz. 19c

(8) 3/8-in. drive Spark Plug Sockets

SIZES, ORDER INFO:

1 1/2-in. flexible. Wt. 7 oz.

9 GT 43323 \$6.19

3/4-in. flexible. Wt. 6 oz.

9 GT 43322 \$6.19

Extra Rubber Insert.

For 3/8-in. sockets.

9 GT 44247—Wt. 3 oz. . . . 19c

CRAFTSMAN® Sockets in STANDARD or METRIC Sizes . . 1/2, 3/4-in. drive

CONSTRUCTION: Molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plating adds rust and corrosion resistance. Chamfered ends allow socket to slide over nuts easily. No-shoulder design allows socket to grip nut at full depth.

CRAFTSMAN® Sockets FULL UNLIMITED WARRANTY
If any CRAFTSMAN® Socket fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement.

1/2-inch Square Drive . . STANDARD or METRIC



14-piece STANDARD Sets

Regular depth with 6 or 12-pt. openings **\$24.99** set

SET COMPOSITION: Thirteen sockets (1/2, 5/8, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1 1/8, 1 1/4, 1 1/2 inches); metal tray.

ORDERING INFORMATION: See construction features and warranty above.

6-pt. openings. Heavier walls than 12-pt. Separate prices total \$27.67.

9 GT 44457—Shpg. wt. 3 lbs. 13 oz. Set \$24.99

12-pt. openings. More turning positions than 6-pt. sockets.

Separate prices total \$27.67.

9 GT 43482—Shpg. wt. 3 lbs. 14 oz. Set \$24.99

9-piece Metric Sets

Regular-depth with 6 or 12-pt. openings **\$13.99** set

SET COMPOSITION: Eight sockets (9, 10, 12, 13, 14, 15, 17, 19-mm.); metal tray.

ORDERING INFORMATION: See construction features, warranty above.

6-pt. openings.

Separate prices total \$17.12.

9 GT 4343—Wt. 1 lb. 5 oz. Set \$13.99

12-pt. openings.

Separate prices total \$16.82.

9 GT 43484—Wt. 1 lb. 5 oz. Set \$13.99

12-piece Deep Standard Set

12-pt. openings **\$29.50** set

Deep sockets are ideal for use on Spring "U"-bolts, etc. Reach nuts with over-protruding bolts.

SET COMPOSITION: Eleven sockets with 12-point openings (1/2, 5/8, 3/4, 13/16, 7/8, 15/16, 1, 1 1/8, 1 1/4, 1 1/2 inches); metal tray.

ORDERING INFORMATION: See construction features, warranty above.

Separate prices total \$33.99.

9 GT 44458—Wt. 5 lbs. 2 oz. Set \$29.50

METRIC-size, Regular-depth Sockets

More and more manufacturers are now using metric fasteners in their products. You'll be ready to repair and service those products with these sockets.

ORDERING INFORMATION: See construction features and warranty above.

Catalog Number	Drive	mm	Pts.	Wt. oz.	Each
9 GT 44251	1/2	9	6	4	\$1.99
9 GT 44252	1/2	10	6	4	1.99
9 GT 44253	1/2	11	6	4	1.99
9 GT 44254	1/2	12	6	4	1.99
9 GT 44255	1/2	13	6	4	2.19
9 GT 44256	1/2	14	6	4	2.19
9 GT 44257	1/2	15	6	4	2.19
9 GT 44258	1/2	17	6	4	2.29
9 GT 44259	1/2	19	6	5	2.29
9 GT 44265	1/2	22	6	6	2.49
9 GT 44231	3/4	9	12	4	1.99
9 GT 44232	3/4	10	12	4	1.99
9 GT 44229	3/4	11	12	4	1.99
9 GT 44233	3/4	12	12	4	1.99
9 GT 44234	3/4	13	12	4	2.09
9 GT 44235	3/4	14	12	4	2.09
9 GT 44236	3/4	15	12	4	2.09
9 GT 44266	3/4	16	12	4	2.29
9 GT 44237	3/4	17	12	4	2.29
9 GT 44267	3/4	18	12	5	2.29
9 GT 44238	3/4	19	12	5	2.29
9 GT 44239	3/4	22	12	6	2.49
9 GT 44242	3/4	24	12	6	2.89
9 GT 44243	3/4	27	12	7	2.89
9 GT 44244	3/4	30	12	9	3.29
9 GT 44245	3/4	32	12	10	3.29

METRIC-size, Deep Sockets

Deep sockets are ideal for Spring "U"-bolts, etc. Reach nuts with over protruding bolts.

ORDERING INFORMATION: See construction features and warranty above.

Catalog Number	Drive	mm	Pts.	Wt. oz.	Each
9 GT 44444	1/2	14	12	6	\$3.29
9 GT 44445	1/2	17	12	7	3.39
9 GT 44446	1/2	19	12	7	3.49
9 GT 44448	1/2	22	12	8	3.69
9 GT 44449	1/2	27	12	11	3.89

STANDARD-size, Regular-depth Sockets

ORDERING INFORMATION: See construction features and warranty above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 44054	1/2	1/2	6	4 oz.	\$1.59
9 GT 44055	1/2	5/8	6	4 oz.	1.59
9 GT 44056	1/2	9/16	6	4 oz.	1.59
9 GT 44057	1/2	5/8	6	4 oz.	1.79
9 GT 44058	1/2	11/16	6	4 oz.	1.79
9 GT 44059	1/2	3/4	6	5 oz.	1.99
9 GT 44063	1/2	13/16	6	5 oz.	2.19
9 GT 44084	1/2	7/8	6	6 oz.	2.19
9 GT 44085	1/2	15/16	6	6 oz.	2.39
9 GT 44086	1/2	1	6	7 oz.	2.39
9 GT 44087	1/2	1 1/8	6	8 oz.	2.69
9 GT 44088	1/2	1 1/4	6	8 oz.	2.69
9 GT 44089	1/2	1 1/2	6	10 oz.	2.79
9 GT 44221	3/4	7/8	8	4 oz.	1.99
9 GT 44222	3/4	15/16	8	4 oz.	1.99
9 GT 44223	3/4	1	8	4 oz.	2.19
9 GT 44224	3/4	1 1/8	8	5 oz.	2.19
9 GT 44225	3/4	1 1/4	8	5 oz.	2.29
9 GT 44226	3/4	1 1/2	8	6 oz.	2.39
9 GT 47501	3/4	7/8	12	4 oz.	1.59
9 GT 47502	3/4	15/16	12	4 oz.	1.59
9 GT 47503	3/4	1	12	4 oz.	1.59
9 GT 47504	3/4	1 1/8	12	4 oz.	1.79
9 GT 47505	3/4	1 1/4	12	4 oz.	1.79
9 GT 47506	3/4	1 1/2	12	4 oz.	1.79
9 GT 47507	3/4	1 3/4	12	4 oz.	1.79
9 GT 47508	3/4	2	12	5 oz.	1.99
9 GT 47509	3/4	2 1/4	12	5 oz.	1.99
9 GT 47511	3/4	1 1/8	12	5 oz.	2.19
9 GT 47512	3/4	1 1/4	12	6 oz.	2.19
9 GT 47513	3/4	1 1/2	12	6 oz.	2.39
9 GT 47514	3/4	1 3/4	12	7 oz.	2.39
9 GT 47515	3/4	2	12	8 oz.	2.69
9 GT 47516	3/4	2 1/4	12	8 oz.	2.69
9 GT 47517	3/4	2 1/2	12	10 oz.	2.79

STANDARD-size Deep Sockets

ORDERING INFORMATION: See construction features and warranty above.

Catalog No.	Drive	In.	Pts.	Wt.	Each
9 GT 47521	1/2	1/2	12	6 oz.	\$2.79
9 GT 47522	1/2	5/8	12	7 oz.	2.79
9 GT 47523	1/2	9/16	12	6 oz.	2.79
9 GT 47524	1/2	5/8	12	7 oz.	2.79
9 GT 47525	1/2	11/16	12	8 oz.	2.89
9 GT 47526	1/2	3/4	12	7 oz.	2.89
9 GT 47527	1/2	13/16	12	8 oz.	2.99
9 GT 47528	1/2	7/8	12	9 oz.	2.99
9 GT 47529	1/2	15/16	12	10 oz.	3.29
9 GT 47531	1/2	1	12	10 oz.	3.49
9 GT 47532	1/2	1 1/8	12	11 oz.	3.49
9 GT 47533	1/2	1 1/4	12	12 oz.	3.69

1/2-in. Square Drive Spark Plug Socket

CONSTRUCTION: Molybdenum alloy steel. Heat-treated, then oil-quenched and tempered. Nickel-chrome plated. Neoprene insert helps protect plugs, 1/8-in. with 6-pt. opening. Hex end for use with wrench.

ORDERING INFORMATION: See warranty above.
9 GT 44241—Wt. 6 oz. \$2.99

1/2-in. Square Drive Drag-link Sockets

CONSTRUCTION: Molybdenum alloy steel. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plated. Screwdriver-type bit for slotted nuts on steering gear and shocks.

ORDERING INFORMATION: See warranty above.

Catalog No.	Size	Shpg. wt.	Each
9 GT 44511	9/16-in.	4 oz.	\$2.19
9 GT 44512	3/4-in.	4 oz.	2.39
9 GT 44513	15/16-in.	5 oz.	2.49
9 GT 44514	1 1/8-in.	8 oz.	2.79

3/4-in. Square Drive Sockets STANDARD-SIZE

CONSTRUCTION: Molybdenum alloy steel. Heat-treated, then oil-quenched and tempered. Nickel-chrome plated. Chamfered ends.

ORDER INFO: See warranty above.


Catalog Number	In.	Pts.	Wt. lbs. oz.	Each
9 GT 47541	3/4	12	8	\$3.29
9 GT 47542	15/16	12	8	3.29
9 GT 47543	1	12	7	3.59
9 GT 47544	1 1/8	12	8	3.79
9 GT 47545	1 1/4	12	8	3.79
9 GT 47546	1 1/2	12	10	3.99
9 GT 47547	1 3/4	12	10	4.19
9 GT 47548	1 7/8	12	12	4.19
9 GT 47549	2	12	13	4.49
9 GT 47551	1 1/8	12	14	4.79
9 GT 47552	1 1/4	12	14	4.99
9 GT 47553	1 1/2	12	1	5.19
9 GT 47554	1 3/4	12	1	5.69
9 GT 47555	1 7/8	12	1	5.69
9 GT 47556	2	12	1	6.19
9 GT 47557	1 7/8	12	1	7.39
9 GT 47558	2	12	1	7.89
9 GT 47559	2 1/4	12	2	9.39
9 GT 47561	2 1/8	12	2	9.99
9 GT 47562	2 1/4	12	2	11.39
9 GT 47563	2 3/4	12	2	12.29

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

1-inch Square Drive STANDARD-SIZE Sockets

CONSTRUCTION: Molybdenum alloy steel. Nickel-chrome plated.
ORDERING INFORMATION: Sent postpaid from factory in Barberton, Ohio. Allow extra time. No C.O.D. Not Craftsman.


Catalog Number	Size (in.)	Pts.	(Wt.) lbs. oz.	Each	Catalog Number	Size (in.)	Pts.	(Wt.) lbs. oz.	Each
9 GT 47901	1 1/8	12	9	\$11.49	9 GT 47974	2 1/4	12	3	\$29.99
9 GT 47902	1 1/2	12	1	12.29	9 GT 47975	2 3/4	12	3	33.99
9 GT 47903	1 3/4	12	2	12.99	9 GT 47976	2 7/8	12	3	39.49
9 GT 47904	1 7/8	12	2	14.29	9 GT 47977	2 1/2	12	3	45.39
9 GT 47905	1 3/4	12	2	14.99	9 GT 47978	2 3/4	12	3	49.29
9 GT 47906	1 7/8	12	2	15.99	9 GT 47979	2 3/4	12	4	52.99
9 GT 47907	1 7/8	12	2	18.49	9 GT 47981	2 3/4	12	5	59.99
9 GT 47908	1 7/8	12	3	19.49	9 GT 47982	2 3/4	12	5	62.49
9 GT 47909	2	12	3	19.99	9 GT 47983	2 3/4	12	5	72.99
9 GT 47911	2 1/8	12	3	25.99	9 GT 47984	3	12	6	79.99
9 GT 47912	2 1/8	12	3	26.99	9 GT 47985	3 1/8	12	6	89.99
9 GT 47913	2 1/4	12	3	28.49					

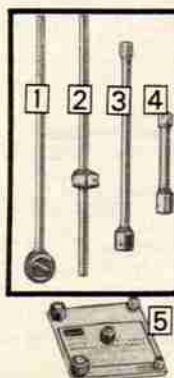

(1 thru 4) 1-in. Dr. Accessories

ORDER INFO: Sent postpaid from Barberton, Ohio. Allow extra time. No C.O.D. Not Craftsman.

- (1) 30-inch Ratchet.
9 GT 47947—(Wt. 6 lbs.) \$74.99
- (2) Slide Bar Handle.
9 GT 47989—(Wt. 5 lbs.) 25.99
- (3) 17-inch Extension Bar.
9 GT 47987—(Wt. 5 lbs.) 23.99
- (4) 8-inch Extension Bar.
9 GT 47986—(Wt. 3 lbs.) 18.99
- (5) 5-piece Magnetic Insert Set.
1/2, 5/8, 3/4, 7/8, 1 1/8-in. inserts; pouch.
9 GT 4404—Shpg. wt. 1 lb. Set \$2.49

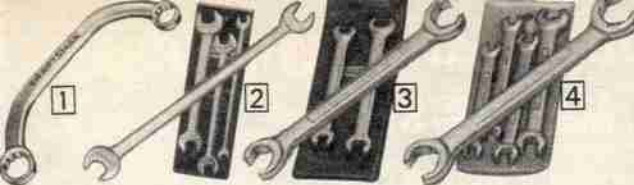

(1-4) **CRAFTSMAN® Manifold, Tappet, Flare-nut Wrenches**
CONSTRUCTION: Fine-quality tools... balance-designed and precision-broached. Made from drop-forged, chrome-plated steel.

(1) Starter and Manifold Wrench

Specially designed to allow you to work in hard-to-get-at engine areas. Measures $\frac{5}{16} \times \frac{7}{8} \times \frac{1}{4}$ inches long with 12 point openings.

ORDERING INFORMATION: See warranty below.

Shipping weight 7 ounces.
9 GT 4376.....\$3.99

(2) 4-piece Tappet Wrench Set

Use to adjust tappets... helps eliminate engine noise. Includes one each of sizes $\frac{3}{16} \times \frac{1}{16}$, $\frac{1}{2} \times \frac{1}{16}$, $\frac{5}{8} \times \frac{1}{16}$, $\frac{3}{4} \times \frac{1}{16}$ inches. Exceed Federal Specifications GGG-W-636e. Plastic pouch included.

ORDERING INFORMATION: See warranty below.

Shipping weight 1 lb. 4 oz.
9 GT 44452.....Set \$11.99

Individual Tappet Wrenches

Catalog Number	Size in.	Wt. oz.	Price
9 GT 44475	$\frac{3}{16} \times \frac{1}{16}$	5	\$3.09
9 GT 44471	$\frac{1}{2} \times \frac{1}{16}$	5	3.39
9 GT 44472	$\frac{5}{8} \times \frac{1}{16}$	6	3.49
9 GT 44473	$\frac{3}{4} \times \frac{1}{16}$	7	3.59
9 GT 44474	$\frac{1}{2} \times \frac{1}{16}$	8	3.79

Full Unlimited Warranty on CRAFTSMAN® Hand Tools
If these CRAFTSMAN Hand Tools fail to give complete satisfaction, return them to any Sears store throughout the United States for a free replacement.

CRAFTSMAN® Adjustable-end Wrenches

Made with 25% more torque strength than Federal Specifications require



- Spring-tension knurl helps eliminate "play" to prevent slipping
- Milled, hardened jaws
- Forged alloy steel body
- Thin head for tight spots

Low as
\$4.77
4-inch length

SIZES, ORDER INFO: See warranty below.

Catalog No.	Size	Capacity	Shpg. wt.	Each
9 GT 44601	4 in.	$\frac{1}{2}$ -in.	4 oz.	\$4.77
9 GT 44602	5 in.	$\frac{3}{4}$ -in.	7 oz.	5.27
9 GT 44603	6 in.	$\frac{7}{8}$ -in.	11 oz.	6.27
9 GT 44604	8 in.	1 in.	1 lb. 2 oz.	6.97
9 GT 44605	10 in.	1 $\frac{1}{8}$ -in.	1 lb. 13 oz.	9.97
9 GT 44606	12 in.	1 $\frac{1}{2}$ -in.	4 lbs. 3 oz.	15.97

3-pc. Set, 6, 8, 10-in. sizes sold above. Plastic pouch included.

ORDERING INFORMATION:
9 GT 44607—Wt. 2 lbs. 1 oz.Set \$16.77


CONSTRUCTION: Forged alloy steel body. Jaws milled and hardened. Chrome-plated to resist rust. Stainless steel knurl spring. Thin head for tight spots, close work. Jaw does not protrude at top when in closed position. Exceeds Fed. Specs. GGG-W-631b for torque strength.

(9) Adjustable-end Wrenches 6 to 15 inches long

CONSTRUCTION: Drop-forged alloy steel. Chrome-plated to resist rust. Polished face. Satin-finished handle. Milled jaws for firm grip. Japan. (Not Craftsman)

SIZES, ORDERING INFORMATION:

Cat. No.	length	Opens	Shpg. wt.	Each
9 GT 30874	6	$\frac{1}{2}$ in.	6 oz.	\$2.99
9 GT 30871	8	$\frac{3}{4}$ in.	10 oz.	3.47
9 GT 30872	10	1 $\frac{1}{8}$ in.	15 oz.	4.27
9 GT 30873	12	1 $\frac{1}{2}$ in.	1 lb. 9 oz.	6.27
9 GT 30877	15	1 $\frac{3}{4}$ in.	3 lbs. 6 oz.	9.87



(7) 10-piece Combination Ignition Sets
... choose metric or standard sizes

CONSTRUCTION: Heat-treated steel. Chrome-plated to resist rust and corrosion. Box-end at one end of wrench; offset, open-end at other. Size stamped on wrenches. Plastic pouch.

SIZES, LENGTHS: Standard— $\frac{3}{16} \times \frac{1}{16}$ to $\frac{3}{4} \times \frac{1}{16}$ in. 2 $\frac{1}{16}$ to 3 $\frac{3}{4}$ in. long. Metric—4x4.5 to 10x11-mm.

ORDERING INFO: See Warranty above.

Standard. Shpg. wt. 6 oz.
9 GT 43441.....Set \$8.99

Metric. Shipping weight 6 ounces.
9 GT 43443.....Set \$8.99

CRAFTSMAN® Ignition Wrench Sets

- Heat-treated for strength
- Chrome-plated to resist rust
- Complete with plastic pouch

(5) 4-pc. Midget Box-end Wrench Sets... choose metric or standard sizes

CONSTRUCTION: Chrome-plated, heat-treated steel. 6 point openings. Plastic pouch incl.

SIZES, LENGTHS: Standard— $\frac{3}{16} \times \frac{1}{16}$, $\frac{1}{2} \times \frac{1}{16}$, $\frac{5}{8} \times \frac{1}{16}$, $\frac{3}{4} \times \frac{1}{16}$ in. long. Metric—4.5x5, 5.5x6, 6x7, 8x9-mm. 3 to 5 mm. long.

ORDER INFO: Shpg. wt. 4 oz. See warranty above.

9 GT 4379—Standard.....Set \$4.99
9 GT 4377—Metric.....Set \$4.99

(8) Craftsman Ignition File.

File points yourself.

CONSTRUCTION: Krommedge®... treated for durability. Double cut. 5 in. long.

ORDERING INFO: Warranty above.
9 GT 3119—Wt. 3 oz.46c



(12) 14-pc. Ignition Set.

Nickel-plated steel. 8 combination midget wrenches ($\frac{1}{16}$ to $\frac{1}{2}$ in.); plier; screwdriver; 6-leaf thickness gauge; file; 2 punches; pouch.


ORDER INFO: Not Craftsman. Shipping weight 10 ounces.
9 GT 44871.....Set \$4.59

(13 thru 16) Assortment of nickel-chrome plated rust-resistant Wrench Sets... heat-treated for strength.

CONSTRUCTION: Nickel-chrome-plated select steel, accurately broached and heat-treated for extra strength. Highly-polished heads. All box-end openings are 12-point. Box-end and open-end wrenches have different size openings at each end. Combination wrenches have the same size openings at both ends. Metal clip included with sets for compact storage. Not Craftsman.

TYPES, SIZES, ORDERING INFORMATION:

Type of Wrench Set	Set size	Size of openings (in.)	Length (inches)	Catalog Number	Wt. lbs. oz.	Set
(13) Comb.	6-pc.	$\frac{3}{16}$ thru $\frac{1}{2}$	4 $\frac{1}{2}$ to 8	9 GT 4390	1 3	\$6.67
(14) Open-end	5-pc.	$\frac{1}{4}$ thru $\frac{1}{2}$	4 to 7 $\frac{1}{2}$	9 GT 4360	1 14	3.97
(15) Box-end	5-pc.	$\frac{3}{16}$ thru $\frac{1}{2}$	7 to 12 $\frac{1}{2}$	9 GT 4381	2 2	6.27
(16) Box-end	3-pc.	$\frac{3}{16}$ thru $\frac{1}{2}$	4 $\frac{1}{2}$ to 8 $\frac{1}{2}$	9 GT 4351	1 11	2.99
Comb. met.	6-pc.	7mm. thru 13mm.	5 $\frac{1}{2}$ to 13 $\frac{1}{2}$	9 GT 43702	1 14	7.97



(17) 10-piece Nut-driver, Screwdriver Set

Plastic handles. Includes 5 nut-drivers: $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{11}{32}$, $\frac{1}{2}$ in. Screwdrivers: $\frac{1}{8}$, $\frac{1}{4}$ in. flat-edge, Nos. 1 and 2 Phillips. Case.

ORDERING INFO:
Wt. 1 lb. 1 oz.
9 GT 45111.....Set \$6.97



OPEN-END, BOX-END AND COMBINATION WRENCHES IN STANDARD OR METRIC SIZES

Like all our finest-quality tools,
they had to earn the right
to wear
the name

CRAFTSMAN®

Here's what makes these Wrenches so outstanding:

- These CRAFTSMAN Wrenches are drop-forged into shape. This forging process increases the strength of our wrenches at points of greatest stress
- These CRAFTSMAN Wrenches are made from a select molybdenum alloy steel—specially chosen for its overall toughness and resistance to brittleness. This alloy gives CRAFTSMAN wrenches the toughness needed to loosen stubborn nuts and bolts
- These CRAFTSMAN Wrenches are heat-treated, then oil-quenched, tempered to uniformly "through-harden" them so there are no inner soft spots
 - These CRAFTSMAN Wrenches are nickel-chrome plated to add rust and corrosion resistance. Matte finish helps provide firm grip. Sizes are stamped into each wrench
 - And you'll never have to pay for replacing a CRAFTSMAN Wrench . . . we back them all with our famous full unlimited warranty below

CRAFTSMAN® HAND TOOL FULL UNLIMITED WARRANTY

If any CRAFTSMAN Hand Tool fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement.

16-pc. STANDARD
Combination
Wrench Set

\$48⁹⁹

9-pc. STANDARD
Open-end
Wrench Set

\$23⁹⁹

10-pc. STANDARD
Box-end
Wrench Set

\$29⁹⁹

Ratcheting Box-end Wrenches... STANDARD or METRIC

(4) CRAFTSMAN Ratcheting Box-end Wrench Sets

CONSTRUCTION: Made of chrome-plated steel. Lexan® polycarbonate shroud seals mechanism from dirt. 12-point openings for use on standard hex nuts and cap screws. Turn wrench over to reverse ratcheting direction. Sizes are stamped into each wrench for easy identification.

5-piece STANDARD Set

SET COMPOSITION: Five ratcheting box-end wrenches (sizes $\frac{1}{4} \times \frac{3}{16}$, $\frac{3}{8} \times \frac{1}{16}$, $\frac{1}{2} \times \frac{1}{16}$, $\frac{3}{4} \times \frac{1}{4}$, $1 \frac{1}{2} \times \frac{1}{2}$ inch); plus plastic storage pouch.

ORDERING INFORMATION: See warranty above. Shpg. wt. 2 lbs. 10 oz.
9 GT 4368Set \$16.49

5-piece METRIC Set

SET COMPOSITION: Five ratcheting box-end wrenches (sizes 6x8, 10x11, 12x13, 14x16 and 17x19mm); plus plastic storage pouch.

ORDERING INFORMATION: See warranty above. Shpg. wt. 2 lbs. 10 oz.
9 GT 4369Set \$16.49

Individual STANDARD Wrenches

Catalog No.	Size	Length	Wt.	Each
9 GT 43681	$\frac{1}{4} \times \frac{3}{16}$ in.	4 $\frac{3}{4}$ in.	5 oz.	\$2.69
9 GT 43682	$\frac{3}{8} \times \frac{1}{16}$ in.	6 $\frac{3}{8}$ in.	8 oz.	2.99
9 GT 43683	$\frac{1}{2} \times \frac{1}{16}$ in.	7 $\frac{5}{8}$ in.	9 oz.	3.69
9 GT 43684	$\frac{3}{4} \times \frac{1}{4}$ in.	8 $\frac{3}{8}$ in.	11 oz.	3.99
9 GT 43685	$1 \frac{1}{2} \times \frac{1}{2}$ in.	10 in.	15 oz.	4.49

Individual METRIC Wrenches

Catalog No.	Size	Length	Wt.	Each
9 GT 43691	6 x 8 mm	4 $\frac{3}{4}$ in.	5 oz.	\$2.69
9 GT 43692	10 x 11 mm	6 $\frac{3}{8}$ in.	7 oz.	2.99
9 GT 43693	12 x 13 mm	7 $\frac{5}{8}$ in.	10 oz.	3.69
9 GT 43694	14 x 16 mm	8 $\frac{3}{8}$ in.	11 oz.	3.99
9 GT 43695	17 x 19 mm	10 in.	15 oz.	4.49

(1) Open-end Wrenches.. STANDARD or METRIC

STANDARD Open-end Sets

9-piece Set
Individual pieces total \$29.51.
SET INCLUDES: Sizes $\frac{1}{4}$ x $\frac{3}{16}$, $\frac{3}{16}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$ -in.; pouch.
ORDERING INFO: See construction features and warranty, page 56.
9 GT 4452—Wt. 3 lbs. 12 oz. Set \$23.99

6-piece Set
Individual pieces total \$19.34.
SET INCLUDES: Sizes $\frac{3}{16}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$ -in.; plastic pouch.
ORDERING INFO: See construction features and warranty, page 56.
9 GT 4451—Wt. 2 lbs. 7 oz. Set \$14.99

5-piece Set
Individual pieces total \$12.55.
SET INCLUDES: Sizes $\frac{1}{4}$ x $\frac{3}{16}$, $\frac{3}{16}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$ -in.; pouch.
ORDERING INFO: See construction features and warranty, page 56.
9 GT 4450—Wt. 1 lb. 8 oz. Set \$9.99

Individual Open-end Wrenches
ORDERING INFO: See construction features and warranty, page 56.

Catalog Number	Opening size, in.	Length, inches	Wt. lbs. oz.	Each
9 GT 44571	$\frac{1}{4}$ x $\frac{3}{16}$	4 $\frac{1}{2}$	3	\$1.79
9 GT 44572	$\frac{3}{16}$ x $\frac{1}{2}$	5 $\frac{1}{2}$	3	1.99
9 GT 44573	$\frac{1}{2}$ x $\frac{3}{4}$	6 $\frac{1}{2}$	5	2.08
9 GT 44574	$\frac{3}{4}$ x $\frac{1}{2}$	7	10	2.59
9 GT 44575	$\frac{1}{2}$ x $\frac{1}{2}$	7 $\frac{1}{2}$	8	2.99
9 GT 44576	$\frac{1}{2}$ x $\frac{1}{2}$	8 $\frac{1}{2}$	10	3.69
9 GT 44577	$\frac{1}{2}$ x $\frac{1}{2}$	9 $\frac{1}{2}$	10	3.99
9 GT 44578	$\frac{1}{2}$ x $\frac{1}{2}$	10 $\frac{1}{2}$	14	4.59
9 GT 44579	$\frac{1}{2}$ x $\frac{1}{2}$	12	2	5.79
9 GT 44580	$\frac{1}{2}$ x $\frac{1}{2}$	14 $\frac{1}{2}$	2	10.69
9 GT 44581	$\frac{1}{2}$ x $\frac{1}{2}$	16 $\frac{1}{2}$	2	11.99
9 GT 44582	$\frac{1}{2}$ x $\frac{1}{2}$	17 $\frac{1}{2}$	2	13.29

METRIC Open-end Sets

9-piece Set
Individual pieces total \$28.81. More and more manufacturers are now using metric fasteners in their products. Be ready to service and repair those products with this set.
SET INCLUDES: Sizes 6x8, 7x9, 10x11, 12x14, 13x15, 16x18, 17x19, 20x22, 22x24mm; plastic pouch.
ORDERING INFO: See construction features and warranty on opposite page.
9 GT 4293—Wt. 2 lbs. 14 oz. Set \$21.99

6-piece Set
Individual pieces total \$17.14.
Be ready to service and repair products with metric fasteners with this set.
SET INCLUDES: Sizes 6x8, 7x9, 10x11, 12x14, 13x15, 17x19mm; pouch.
ORDERING INFO: See construction features and warranty on opposite page.
9 GT 44501—Wt. 1 lb. 2 oz. Set \$14.99

Individual Open-end Wrenches
ORDERING INFO: See construction features and warranty on opposite page.

Catalog Number	Size (mm.)	Length (in.)	Wt. lbs. oz.	Each
9 GT 44502	6x8	4 $\frac{1}{2}$	3	\$2.39
9 GT 44503	7x9	5	3	2.49
9 GT 44504	10x11	5 $\frac{1}{2}$	4	2.59
9 GT 44505	12x14	6 $\frac{1}{2}$	5	2.79
9 GT 44506	13x15	7	6	3.19
9 GT 44507	16x18	7 $\frac{1}{2}$	7	3.39
9 GT 44508	17x19	8 $\frac{1}{2}$	8	3.69
9 GT 44509	20x22	9 $\frac{1}{2}$	11	3.99
9 GT 44510	21x23	10 $\frac{1}{2}$	15	4.19
9 GT 44511	22x24	10 $\frac{1}{2}$	13	4.29
9 GT 44512	24x26	11 $\frac{1}{2}$	1	4.89
9 GT 44513	25x27	11 $\frac{1}{2}$	1	5.49
9 GT 44514	28x30	12 $\frac{1}{2}$	1	5.99
9 GT 44515	30x32	13 $\frac{1}{2}$	1	11.09

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

(2) Box-end Wrenches.. STANDARD or METRIC

STANDARD Box-end Sets

10-piece Set
Individual pieces total \$34.00.
SET INCLUDES: $\frac{1}{4}$ x $\frac{3}{16}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$ -in.; pouch.
ORDERING INFO: See construction features and warranty, page 56.
9 GT 4463—Wt. 5 lbs. 11 oz. Set \$29.99

6-piece Set
Individual pieces total \$19.84.
SET INCLUDES: $\frac{3}{16}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$ -in.; pouch.
ORDERING INFO: See construction features and warranty, page 56.
9 GT 4461—Wt. 3 lbs. 4 oz. Set \$15.99

5-piece Set
Individual pieces total \$13.35.
SET INCLUDES: $\frac{1}{4}$ x $\frac{3}{16}$, $\frac{3}{16}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{1}{2}$ -in.; also with plastic pouch.
ORDERING INFO: See construction features and warranty, page 56.
9 GT 4464—Wt. 1 lb. 14 oz. Set \$10.99

Individual Box-end Wrenches

Catalog Number	Opening size, inches	Length, inches	Wt. lbs. oz.	Each
9 GT 43919	$\frac{1}{4}$ x $\frac{3}{16}$	7 $\frac{1}{2}$	3	\$1.99
9 GT 43920	$\frac{3}{16}$ x $\frac{1}{2}$	7 $\frac{1}{2}$	4	2.09
9 GT 43921	$\frac{1}{2}$ x $\frac{3}{4}$	8 $\frac{1}{2}$	5	2.29
9 GT 43922	$\frac{3}{4}$ x $\frac{1}{2}$	9 $\frac{1}{2}$	5	2.69
9 GT 43923	$\frac{1}{2}$ x $\frac{1}{2}$	9 $\frac{1}{2}$	6	2.89
9 GT 43924	$\frac{1}{2}$ x $\frac{1}{2}$	10 $\frac{1}{2}$	7	3.19
9 GT 43925	$\frac{1}{2}$ x $\frac{1}{2}$	11 $\frac{1}{2}$	8	3.39
9 GT 43926	$\frac{1}{2}$ x $\frac{1}{2}$	12 $\frac{1}{2}$	10	3.89
9 GT 43927	$\frac{1}{2}$ x $\frac{1}{2}$	13 $\frac{1}{2}$	13	4.69
9 GT 43928	$\frac{1}{2}$ x $\frac{1}{2}$	14 $\frac{1}{2}$	1	6.89
9 GT 43929	$\frac{1}{2}$ x $\frac{1}{2}$	15 $\frac{1}{2}$	1	9.79
9 GT 43930	$\frac{1}{2}$ x $\frac{1}{2}$	16 $\frac{1}{2}$	2	13.88

Short Box-end Wrenches in STANDARD sizes

3-piece Set
SET INCLUDES: Sizes $\frac{3}{16}$ x $\frac{1}{2}$, $\frac{1}{2}$ x $\frac{3}{4}$, $\frac{3}{4}$ x $\frac{1}{2}$ -in.; plastic pouch.
ORDERING INFORMATION: See construction features and warranty on opposite page.
9 GT 4385—Wt. 8 oz. Set \$6.99

METRIC Box-end Set

6-piece Set
Individual pieces total \$22.04. Like all of our box-end wrenches, these have countersunk 12-point openings that fit nuts quickly. More and more manufacturers are beginning to use metric fasteners in their products. You'll be ready to service and repair those products with this metric set.

SET INCLUDES: Sizes 6x8mm, 7x9mm, 10x11mm, 12x14mm, 13x15mm, 17x19mm; and plastic pouch.
ORDERING INFORMATION: See construction features and warranty on opposite page.
Shipping weight 1 pound 3 ounces.
9 GT 42951—Set \$15.99

Individual Box-end Wrenches
ORDERING INFORMATION: See construction features and warranty on opposite page.

Catalog Number	Size (mm.)	Length (in.)	Shipping weight	Price each
9 GT 42952	6x8	7	3 oz.	\$2.89
9 GT 42953	7x9	7 $\frac{1}{4}$	4 oz.	3.19
9 GT 42954	10x11	7 $\frac{1}{2}$	4 oz.	3.49
9 GT 42955	12x14	9 $\frac{1}{4}$	5 oz.	3.79
9 GT 42956	13x15	9 $\frac{1}{2}$	6 oz.	4.09
9 GT 42957	16x18	10 $\frac{1}{2}$	8 oz.	4.29
9 GT 42958	17x19	11 $\frac{1}{2}$	7 oz.	4.59
9 GT 42959	20x22	11 $\frac{3}{4}$	13 oz.	4.79
9 GT 42960	21x23	12 $\frac{1}{4}$	14 oz.	4.99
9 GT 42961	22x24	13 $\frac{1}{4}$	10 oz.	5.19
9 GT 42962	25x28	14 $\frac{1}{4}$	1 lb. 4 oz.	6.39
9 GT 42963	27x30	15 $\frac{1}{4}$	1 lb. 4 oz.	7.29
9 GT 42964	28x32	16 $\frac{1}{4}$	1 lb. 7 oz.	7.49

Individual Short Box-end Wrenches
ORDER INFO: See warranty, p. 56.

Catalog Number	Size (in.)	Length (in.)	Wt. oz.	Each
9 GT 43863	$\frac{3}{16}$ x $\frac{1}{2}$	4 $\frac{3}{4}$	3	\$2.29
9 GT 43864	$\frac{1}{2}$ x $\frac{3}{4}$	5 $\frac{1}{2}$	4	2.39
9 GT 43865	$\frac{3}{4}$ x $\frac{1}{2}$	6 $\frac{1}{2}$	5	2.59

(3) Combination Wrenches.. STANDARD or METRIC

STANDARD-size Combination Wrench Sets

16-piece STANDARD Set
Individual pieces total \$63.24.
SET INCLUDES: Sizes $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$ -in.; cardboard box.
ORDERING INFORMATION: See construction features and warranty on opposite page.
9 GT 4496B—Wt. 9 lbs. 15 oz. Set \$48.99

14-piece STANDARD Set
Individual pieces total \$59.76.
SET INCLUDES: Sizes $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$ -in.; and also includes plastic storage pouch.
ORDERING INFORMATION: See construction features and warranty on opposite page.
Shipping weight 10 lbs. 8 oz.
9 GT 4496A—Set \$45.99

Individual STANDARD Combination Wrenches
ORDER INFO: See construction features and warranty on page 56.

Catalog Number	Size (in.)	Length (in.)	Wt. oz.	Price each
9 GT 44969	$\frac{1}{4}$	3 $\frac{1}{2}$	3	\$1.69
9 GT 44970	$\frac{3}{16}$	4 $\frac{1}{2}$	3	1.79
9 GT 44971	$\frac{1}{2}$	5 $\frac{1}{2}$	3	1.89
9 GT 44972	$\frac{3}{4}$	6 $\frac{1}{2}$	3	2.29
9 GT 44973	$\frac{1}{2}$	7 $\frac{1}{2}$	4	2.39
9 GT 44974	$\frac{1}{2}$	8 $\frac{1}{2}$	5	2.59
9 GT 44975	$\frac{1}{2}$	9 $\frac{1}{2}$	5	2.69
9 GT 44976	$\frac{1}{2}$	10 $\frac{1}{2}$	7	2.79
9 GT 44977	$\frac{1}{2}$	11 $\frac{1}{2}$	7	2.99

6-piece STANDARD Set
Use open end in areas where you can get plenty of swing, or 12 pt. swivel socket end in restricted areas.
CONSTRUCTION: Molybdenum alloy steel. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plated to resist rust and corrosion.
Individual pieces total \$33.04.
SET INCLUDES: Six open-end and socket-type wrenches. Sizes $\frac{3}{16}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, and $\frac{1}{2}$ -in. Measure $\frac{7}{16}$ to $1\frac{1}{2}$ inches long. Also includes plastic storage pouch.
ORDERING INFORMATION: See warranty on facing page.
9 GT 4255—Shipping weight 2 lbs. 3 oz. Set \$28.99

10-piece STANDARD Set
Individual pieces total \$32.70.
SET INCLUDES: Sizes $\frac{3}{16}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$ -in.; pouch.
ORDERING INFO: See construction features and warranty on opposite page.
9 GT 4496—Shpg. wt. 4 lbs. Set \$26.99

6-piece STANDARD Set
Individual pieces total \$16.74.
SET INCLUDES: Sizes $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{1}{2}$, $\frac{1}{2}$ -in.; plastic pouch.
ORDERING INFO: See construction features and warranty on opposite page.
9 GT 4482—Wt. 1 lb. 12 oz. Set \$12.99

5-piece STANDARD Set
Individual pieces total \$11.75.
SET INCLUDES: Sizes $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{2}$, $\frac{1}{2}$ -in.; plastic pouch.
ORDERING INFO: See construction features and warranty on opposite page.
9 GT 4487—Wt. 13 oz. Set \$9.99

Catalog Number	Size (in.)	Length (in.)	Wt. lbs. oz.	Price each
9 GT 44701	$\frac{3}{16}$	9 $\frac{1}{2}$	10	\$3.29
9 GT 44702	$\frac{1}{2}$	10 $\frac{1}{2}$	10	3.79
9 GT 44703	$\frac{3}{4}$	11 $\frac{1}{2}$	11	4.19
9 GT 44704	$\frac{1}{2}$	12 $\frac{1}{2}$	14	4.49
9 GT 44705	$\frac{1}{2}$	13 $\frac{1}{2}$	1	4.99
9 GT 44706	$\frac{1}{2}$	14 $\frac{1}{2}$	1	5.39
9 GT 44707	$\frac{1}{2}$	15 $\frac{1}{2}$	1	7.99
9 GT 44708	$\frac{1}{2}$	16 $\frac{1}{2}$	1	8.89
9 GT 44709	$\frac{1}{2}$	18 $\frac{1}{2}$	1	10.79

METRIC-size Combination Wrench Sets

14-piece METRIC Set
Individual pieces total \$43.76.
More and more manufacturers are beginning to use metric fasteners in their products. You'll be ready to service and repair those products with this metric set. Includes larger-size metric combination wrenches than any other set we sell. Like all of our combination wrenches, they have one open end and one box end with countersunk 12-point openings.
SET INCLUDES: Sizes 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 and 24mm; plastic pouch.
ORDERING INFO: See construction and warranty on opposite page.
9 GT 42908—Wt. 4 lbs. 7 oz. Set \$36.99

Individual METRIC Combination Wrenches
ORDER INFO: See construction features and warranty on page 56.

Catalog Number	Size (mm.)	Length (in.)	Wt. oz.	Each
9 GT 42909	6	3 $\frac{1}{2}$	3	\$2.39
9 GT 42910	7	3 $\frac{1}{2}$	3	2.49
9 GT 42911	8	4 $\frac{1}{2}$	3	2.49
9 GT 42912	9	4 $\frac{1}{2}$	3	2.49
9 GT 42913	10	4 $\frac{1}{2}$	3	2.59
9 GT 42914	11	5 $\frac{1}{2}$	4	2.59
9 GT 42915	12	5 $\frac{1}{2}$	4	2.79
9 GT 42916	13	5 $\frac{1}{2}$	4	2.89
9 GT 42917	14	6 $\frac{1}{2}$	5	2.89
9 GT 42918	15	6 $\frac{1}{2}$	5	3.19
9 GT 42919	17	7 $\frac{1}{2}$	7	3.19
9 GT 42920	19	8 $\frac{1}{2}$	7	3.39

10-piece METRIC Set
Individual pieces total \$29.00.
More manufacturers are beginning to use metric fasteners in their products. You'll be ready to service and repair those products with this metric set.
SET INCLUDES: Sizes 6, 8, 9, 10, 12, 13, 14, 15, 17 and 19mm; and plastic pouch.
ORDERING INFO: See construction and warranty on opposite page.
9 GT 4291—Wt. 2 lbs. 4 oz. Set \$24.99

6-piece METRIC Set
Individual pieces total \$16.14.
SET INCLUDES: Sizes 8, 9, 10, 12, 13, 14mm; plastic pouch.
ORDERING INFO: See construction and warranty on opposite page.
9 GT 4292—Wt. 1 lb. 3 oz. Set \$12.99

Catalog Number	Size (mm.)	Length (in.)	Wt. lbs. oz.	Each
9 GT 42925	18	8 $\frac{1}{2}$	8	\$3.49
9 GT 42926	19	9 $\frac{1}{2}$	9	3.89
9 GT 42927	20	10 $\frac{1}{2}$	11	4.19
9 GT 42928	21	10 $\frac{1}{2}$	13	4.39
9 GT 42929	22	11 $\frac{1}{2}$	11	4.59
9 GT 42930	23	12 $\frac{1}{2}$	15	4.79
9 GT 42931	24	12 $\frac{1}{2}$	14	5.09
9 GT 42932	25	13 $\frac{1}{2}$	1	5.29
9 GT 42933	27	14 $\frac{1}{2}$	1	6.29
9 GT 42934	28	15 $\frac{1}{2}$	1	7.49
9 GT 42935	30	16 $\frac{1}{2}$	1	7.99
9 GT 42936	32	16 $\frac{1}{2}$	1	7.99

Individual Wrenches
ORDER INFO: See warranty, p. 56.

Catalog Number	Size (in.)	Length (inches)	Shpg. wt.
9 GT 42544	3/8	7 1/16	5 oz.
9 GT 42541	7/16	7 11/16	5 oz.
9 GT 42542	1/2	8 1/16	7 oz.
9 GT 42543	9/16	8 5/16	7 oz.
9 GT 42545	3/8	9 7/16	9 oz.
9 GT 42547	11/16	9 29/32	10 oz.
9 GT 42546	3/4	10 1/8	11 oz.

CRAFTSMAN® Socket Wrench Sets in 1/4, 3/8, 1/2, 3/4-inch square drive..

(1 thru 4) 1/4-in. Square Drive Sets

Ideal for precision ignition, radio, refrigerator, electronic and airplane work



CONST: All sockets, ratchets, ratchet accessories constructed of molybdenum alloy steel. Heat-treated, tempered for uniform hardness. Nickel-chrome plated to resist rust.

(1) 12-pc. STANDARD Set

Sep. prices \$9.99
total \$14.30

SET COMPOSITION: Nine 6-point sockets (3/16 thru 1/2-in.); flex T-handle; crossbar; Permanex® case.

ORDERING INFORMATION: See warranty on facing page.
9 GT 44062—Wt. 15 oz. Set \$9.99



(2) 15-pc. STANDARD Set

Sep. prices \$19.50
total \$24.06

SET COMP: Nine 6-pt. sockets (3/16 thru 1/2-in.); quick-release, reversible ratchet; 6-in. socket extension; 3 extension bars (1 1/2, 3, 6-in.); Permanex® case.

ORDERING INFORMATION: See warranty on facing page.
9 GT 44141—Wt. 15 oz. Set \$19.50




15-pc. METRIC Set

Sep. prices \$19.50
total \$24.06

SET COMP: Nine 6-pt. sockets (4, 5, 6, 7, 8, 9, 10, 11, 12mm); quick-release, reversible ratchet; 6-in. socket ext.; 3 ext. bars (1 1/2, 3, 6-in.); Permanex® case.

ORDERING INFORMATION: See warranty on facing page.
9 GT 44143—Wt. 15 oz. Set \$19.50

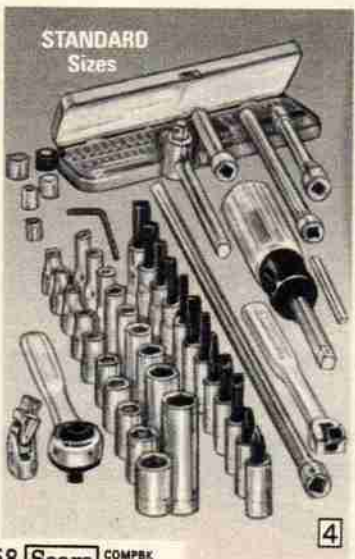

(3) 25-pc. STANDARD Set

Sep. prices \$34.50
total \$44.56

SET COMPOSITION: Nine 6-point sockets and nine 6-pt. deep sockets (3/16 thru 1/2-in.); quick-release reversible ratchet; 6-in. socket extension; 3 extension bars (1 1/2, 3, 6-in.); universal joint; Permanex® case.

ORDERING INFORMATION: See warranty on facing page.
9 GT 44142—Wt. 2 lbs. Set \$34.50

(4) 48-pc. STANDARD Set

Sep. prices \$59.99
total \$84.37

SET COMPOSITION: Ten 6-pt. sockets (3/32 thru 1/2-in.); nine 6-pt. deep sockets (3/16 thru 1/2-in.); fine-tooth, quick-release reversible ratchet; flex T-handle; slide bar; crossbar; 6-in. socket extension; 4-in. flex extension handle; 3 extension bars (3, 6, 14-in.); 5/64-inch setscrew wrench; 5 hex wrench sockets (3/16 thru 3/4-in.); 2 Phillips screwdriver-bit sockets (Nos. 1, 2); 3 clutch-head bit sockets (3/32 thru 3/16-in.); 2 screwdriver-bit sockets (.030, .039); universal joint; 5-pc. magnetic insert set; metal case.

ORDERING INFORMATION: See warranty on facing page.
Shpg. wt. 5 lbs. 2 oz.
9 GT 44392.....Set \$59.99

(5 thru 7) 3/8-in. Square Drive Sets

Ideal for work on cars, outboard motors, lawn mowers, aircraft. Excellent for use around home



CONSTRUCTION: All sockets, ratchets and ratchet accessories constructed of molybdenum alloy steel. Heat-treated and tempered for uniform hardness and strength. Nickel-chrome plated to resist rust.


(5) 10-pc. STANDARD Set

Sep. prices \$12.99
total \$16.42

SET COMP.: Seven 12-point sockets (3/8 thru 3/4-in.); flex T-handle; crossbar; Permanex® case.

ORDERING INFORMATION: See warranty on facing page.

Shpg. wt. 2 lbs. 2 oz.
9 GT 4395.....Set \$12.99

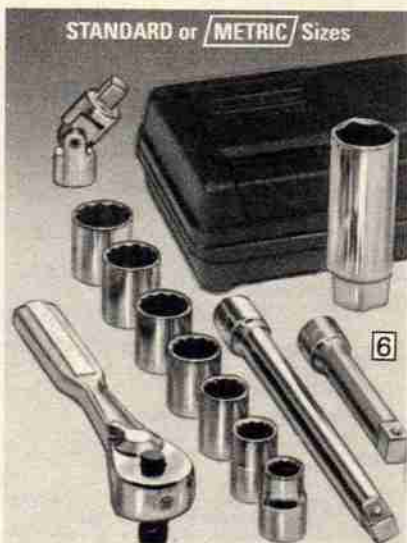


(6) 13-pc. STANDARD Set

Sep. prices \$24.50
total \$32.18

SET COMPOSITION: Seven 12-point sockets (3/8 thru 3/4-in.); 1 1/8-in., 6-point spark plug socket; quick-release, reversible ratchet; universal joint; 2 extension bars (3, 6-in.); Permanex® case.

ORDERING INFO: See warranty on facing page.

Shpg. wt. 2 lbs. 9 oz.
9 GT 33225.....Set \$24.50

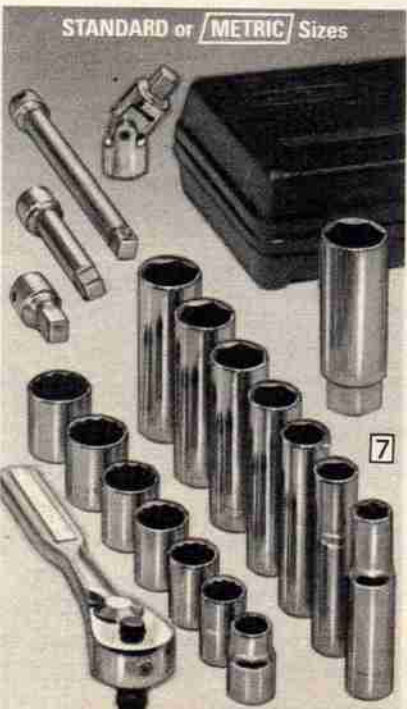

13-pc. METRIC Set

Sep. prices \$24.50
total \$32.88

SET COMPOSITION: Like (6), but seven 12-point sockets are 9 thru 15mm.

ORDERING INFO: See warranty on facing page.

Shpg. wt. 2 lbs. 8 oz.
9 GT 44147.....Set \$24.50

(7) 21-pc. STANDARD Set

Sep. prices \$34.50
total \$49.30

SET COMPOSITION: Seven 6-point deep sockets (3/8 thru 3/4-in.); seven 12-point sockets (3/8 thru 3/4-in.); 1 1/8-in. spark plug socket; quick-release, reversible ratchet; universal joint; 3 extension bars (1 1/2, 3 and 6-in.); Permanex® case.

ORDERING INFO: See warranty on facing page.

Shpg. wt. 3 lbs. 12 oz.
9 GT 33227.....Set \$34.50

21-pc. METRIC Set

Sep. prices \$34.50
total \$51.00

SET COMP: As (7), but seven 6-point deep sockets, seven 12-point sockets are 9 thru 15mm.

ORDERING INFO: See warranty on facing page.

Shpg. wt. 3 lbs. 9 oz.
9 GT 44149.....Set \$34.50

STANDARD or METRIC sizes

(8) 1/4 and 3/8-inch Square Drive Set

22-piece
STANDARD Set
\$29.50


CONSTRUCTION: All sockets, ratchets and accessories constructed of molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated.

SET COMP.: Permanex® case. 1/4-inch Square Drive Parts: Seven 6-point sockets (1/4 thru 1/2-inch); 6-inch socket extension.

3/8-inch Square Drive Parts: Seven 12-point sockets (3/8 thru 1/2-inch); 13/16-inch, 6-point spark plug socket; quick-release, reversible ratchet; 1/4-inch socket adapter; 3 extensions (1 1/2, 3, 6-inch).

ORDERING INFORMATION: See warranty above. Wt. 2 lbs. 4 oz. 9 GT 33236.....Set \$29.50

STANDARD
Sizes

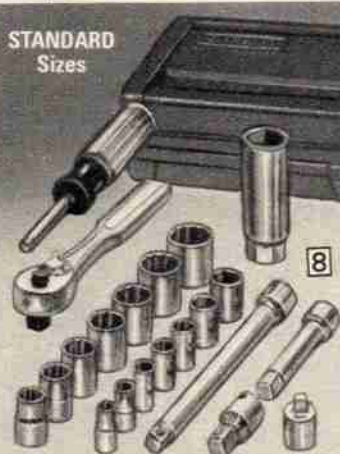

(9) 3/4-inch Square Drive Set

Made to handle tough jobs on heavy equipment in plants, garages and repair shops

STANDARD Sizes



18-piece STANDARD Set \$115.00

CONSTRUCTION: All sockets, ratchets and ratchet accessories constructed of molybdenum alloy steel. Heat-treated and tempered for uniform hardness and strength. Nickel-chrome plated to resist rust and corrosion.

SET COMPOSITION: Thirteen 12-pt. sockets (1 1/16 thru 2-in.); quick-release, reversible ratchet; slide bar handle; 8, 16-in. extension bars; metal case.

ORDERING INFORMATION: See warranty above. 9 GT 46315C—Shipping weight 33 pounds.....Set \$115.00

1-in. Sq. Drive Set

The largest drive size we offer... made to handle the toughest, biggest jobs

21-piece STANDARD Set
\$550.00

CONSTRUCTION: Molybdenum alloy steel. Heat-treated and tempered. Nickel-chrome plated.

SET COMP.: Seventeen 12-point sockets (1 1/16 thru 3 1/2-inch); two extension bars (8, 17-inch); reversible ratchet; flex T-handle; metal case.

ORDER INFO: Not CRAFTSMAN. Sent from Chicago, Atlanta, Dallas, Phila. or L.A. Allow time. Pay shpg. from your Dist. Cntr. T9 GT 47969N—Wt. 119 lbs. Set \$550.00



STANDARD Sizes

(10 and 11) 1/2-in. Sq. Drive Sets

Excellent for use in repairing power farm equipment, engines and other machinery

CONSTRUCTION: All sockets, ratchets and ratchet accessories constructed of molybdenum alloy steel... specially chosen for its strength and resistance to brittleness. Heat-treated and tempered for uniform hardness and strength. Nickel-chrome plated to resist rust and corrosion.

(10) 13-pc.
STANDARD Set
\$21.99

SET COMPOSITION: Ten 12-point sockets (7/16 thru 1-inch); flex T-handle; cross-bar; Permanex® plastic case.

ORDERING INFORMATION: See warranty above.

Shpg. wt. 5 lbs. 5 oz. 9 GT 4396.....Set \$21.99

(11) 16-pc.
STANDARD Set
\$34.50

SET COMPOSITION: Ten 12-point sockets (7/16 thru 1-inch); 13/16-inch, 6-point spark plug socket; quick-release, reversible ratchet; universal joint; 2 extension bars (3, 6-inch); and Permanex® plastic case.

ORDERING INFORMATION: See Warranty above.

Shpg. wt. 6 lbs. 3 oz. 9 GT 44094.....Set \$34.50

16-pc. METRIC Set
\$34.50

SET COMPOSITION: Ten 12-point sockets (sizes 9, 10, 11, 12, 13, 14, 15, 17, 19, 22mm); quick-release, reversible ratchet; 13/16-inch, 6-point spark plug socket; universal joint; 2 extension bars (3, 6-inch); and Permanex® plastic case.

ORDERING INFORMATION: See warranty above.

Shpg. wt. 5 lbs. 15 oz. 9 GT 44098.....Set \$34.50

STANDARD Sizes





STANDARD or METRIC Sizes



Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

CRAFTSMAN® METRIC Socket and Wrench Sets expand your mechanical versatility

CRAFTSMAN® HAND TOOL FULL UNLIMITED WARRANTY
If any CRAFTSMAN Hand Tool fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement.

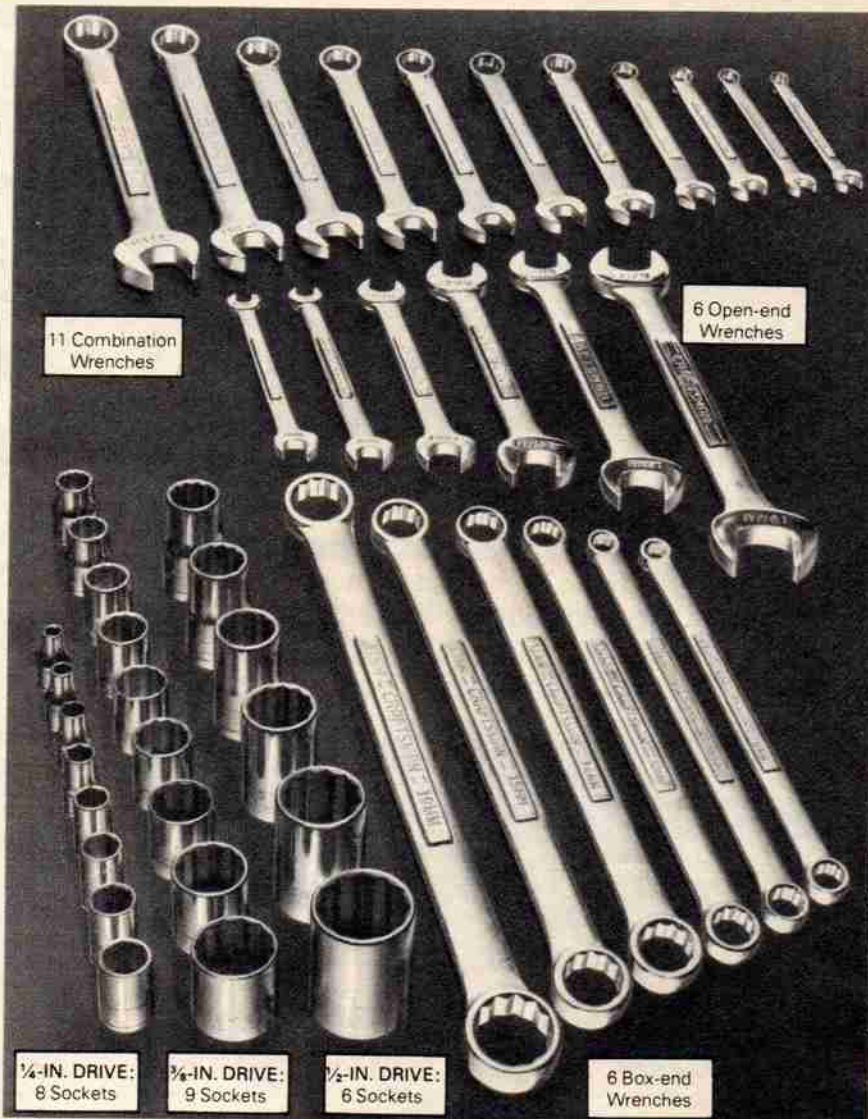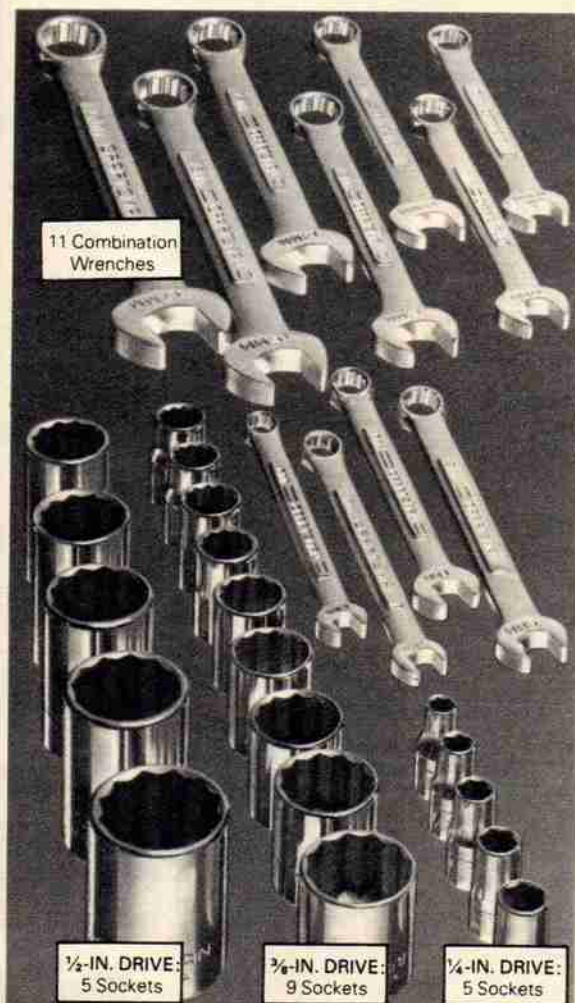

30-piece METRIC Socket and Wrench Set

Sep. prices total \$60.80 **\$49.50**

CONSTRUCTION: Every socket and wrench is made from a select molybdenum alloy steel—specially chosen because of its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance.

SET COMPOSITION:

11 Combination Wrenches: (6, 7, 8, 9, 10, 11, 12, 13, 14, 15 and 17mm).

19 Sockets: Five 6-point 1/4-in. sq. drive (4, 5, 6, 7, 8mm); nine 12-pt. 3/8-in. sq. drive (9, 10, 11, 12, 13, 14, 15, 17, 19mm); five 12-point 1/2-in. sq. drive (14, 15, 17, 19, 22mm).

ORDERING INFORMATION: See Warranty above.

9 GT 33015—Shipping weight 3 lbs. 5 oz.Set \$49.50

46-pc. METRIC Socket and Wrench Set adds versatility to your existing Standard set

Sep. prices total \$78.50 **\$69.00**

CONSTRUCTION: Every socket and wrench is made from a select molybdenum alloy steel—specially chosen because of its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” tools. Nickel-chrome plating adds rust and corrosion resistance.

SET COMPOSITION:

23 Wrenches: Six open-end (sizes 6x8mm thru 17x19mm); six box-end (sizes 6x8mm thru 17x19mm); eleven combination (sizes 6mm thru 17mm).

23 Sockets: Eight 6-pt., 1/4-in. sq. drive (sizes 4 thru 11mm); nine 12-pt., 3/8-in. sq. drive (sizes 9 thru 19mm); six 12-pt., 1/2-in. sq. drive (sizes 13 thru 22mm).

ORDERING INFORMATION: See Warranty at top of page.

9 GT 33013—Complete 46-piece Set. Shipping weight 5 pounds 12 ouncesSet \$69.00

23 Wrenches alone. Separate prices total \$69.37.

9 GT 33011—Shipping weight 4 pounds 4 ouncesSet 49.00

23 Sockets alone. Separate prices total \$35.67.

9 GT 33012—Shipping weight 1 pound 13 ouncesSet 29.50

CRAFTSMAN® 12-pc. METRIC Bicycle Tool Kit

\$19.99 kit

CONSTRUCTION: Alloy steel wrenches. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plating resists rust and corrosion.

KIT COMPOSITION: 3 tire tools; spoke wrench; 5 open-end wrenches (sizes 6x8mm, 7x9mm, 10x11mm, 12x14mm, 13x15mm); 2 screwdrivers (3/16x4, No. 2 Phillips); 6-inch adjustable wrench; and plastic roll pouch which straps to bike.

ORDERING INFO: See Warranty above.

9 GT 43442—Shpg. wt. 2 lbs.. Kit \$19.99

CRAFTSMAN® 11-pc. METRIC Car and Motorcycle Travel Kit



\$29.99 kit

CONSTRUCTION: Alloy steel wrenches. Heat-treated, then oil-quenched and tempered for uniform hardness. Nickel-chrome plating resists rust and corrosion.

KIT COMPOSITION: 3/8-in. sq. drive quick-release ratchet; 13/16-in. spark plug socket; 3 open-end wrenches (6x8, 10x11, 12x14mm); 3-in. ext. bar; thin-nose pliers; 2 screwdrivers (3/16x4, No. 2 Phillips); 8-in. adj. wrench; motorcycle shock wrench; plastic pouch.

ORDERING INFO: See Warranty above.

9 GT 44628—Wt. 3 lbs.Kit \$29.99

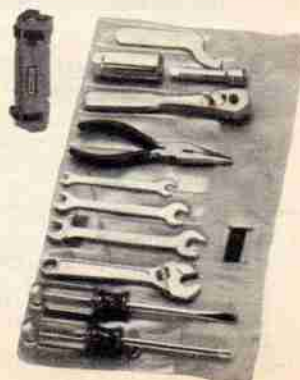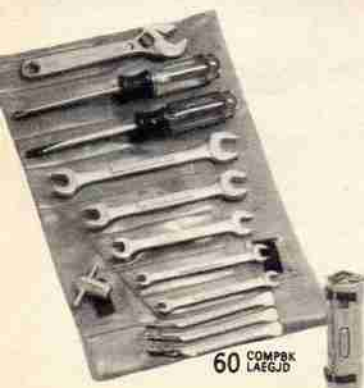

CRAFTSMAN® Mechanics' Tool Sets



78-PC. METRIC SET

Separate prices
total \$133.00 **\$79.99**

More and more manufacturers are now using metric fasteners in their products... you'll be ready to repair and service those products with this metric mechanics' tool set. Ideal for autos, motorcycles, bikes and many jobs around the home.

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen because of its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly "through-harden" tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance.

SET COMPOSITION: 1/4-inch Square Drive Parts: eight 6-pt. sockets (4 thru 11mm); 6-in. flex T handle; cross bar.

3/8-inch Square Drive Parts: nine 12-point sockets (sizes 9, 10, 11, 12, 13, 14, 15, 17, 19mm); quick-release reversible ratchet; 3-inch extension bar.

1/2-inch Square Drive Parts: nine 12-point sockets (sizes 9, 10, 12, 13, 14, 15, 17, 19 and 22mm); quick-release reversible ratchet; 6-inch extension bar.

Wrenches: 7 open-end (6x8 thru 22x24mm); 7-pc. open-end ignition set (5.5, 6 thru 11mm). Miscellaneous Parts: three screwdrivers (3/16x4 and 1/4x6 standard and No. 2 Phillips sizes); 10-piece hex key set, 5-piece magnetic insert set; center punch; pin punch; hacksaw with 10 extra blades; steel tool box.

ORDERING INFO: See warranty, page 60.
Shipping weight 20 pounds.
9 GT 33188C Set \$79.99



78-PC. STANDARD SET

Separate prices
total \$113.36 **\$74.99**

CONSTRUCTION: Flat wrenches, sockets, ratchets, ratchet accessories made from molybdenum alloy steel. Heat-treated, oil-quenched and tempered. Nickel-chrome plated to resist rust and corrosion.

SET COMPOSITION:

1/4-in. Sq. Drive Parts: nine 12-pt. sockets (3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2-inch).

3/8-in. Sq. Drive Parts: six 12-pt. sockets (3/8, 7/16, 1/2, 5/8, 11/16-in.); socket drive adapter (3/8 to 1/4-in.); 13/16-in. spark plug socket; quick-release reversible ratchet; 6-inch extension bar.

1/2-in. Sq. Drive Parts: six 12-pt. sockets (1/2, 9/16, 5/8, 11/16, 3/4, 13/16-in.); quick-release reversible ratchet; 3-inch extension bar.

Wrenches: 5 open-end (1/4x5/16, 3/8x7/16, 1/2x9/16, 9/16x11/16, 5/8x3/4-in.); 10-piece combination ignition wrench set.

Miscellaneous Parts: 14-pc. hex key set; 5-pc. magnetic insert set; 3 screwdrivers (3/16x4, 1/4x6 standard and No. 2 Phillips); center punch; pin punch; hacksaw with 10 extra blades; steel tool box.

ORDER INFO: See warranty, page 60.
Shipping weight 19 pounds.
9 GT 33088C Set \$74.99



58-PC. STANDARD SET

Separate prices
total \$86.17 **\$49.99**

CONSTRUCTION: Flat wrenches, sockets, ratchets made from molybdenum alloy steel. Heat-treated, oil-quenched and tempered. Nickel-chrome plated to resist rust and corrosion.

SET COMPOSITION:

1/4-in. Sq. Drive Parts: seven 6-pt. sockets (3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8-in.).

3/8-in. Sq. Drive Parts: five 12-pt. sockets (3/8, 7/16, 1/2, 5/8, 11/16-in.); socket adapter (3/8 to 1/4); 13/16-in. spark plug socket; quick-release reversible ratchet; 6-inch extension bar.

1/2-in. Sq. Drive Parts: five 12-pt. sockets (1/2, 9/16, 5/8, 11/16, 3/4, 13/16-in.); quick-release reversible ratchet; 3-inch extension bar.

Wrenches: 4 open-end (1/4x5/16, 3/8x7/16, 1/2x9/16, 5/8x3/4-in.).

Miscellaneous Parts: 5-pc. magnetic insert set; 14-pc. hex key set; hacksaw with 10 extra blades; steel tool box.

ORDER INFO: See warranty, page 60.
Shipping weight 13 pounds 13 ounces.
9 GT 33095 Set \$49.99



41 OTHER PIECES

25 WRENCHES

1/4-IN. DRIVE:
9 Sockets,
4 Accessories

1/2-IN. DRIVE:
16 Sockets,
5 Accessories

1/2-IN. DRIVE:
13 Sockets,
3 Accessories



Both Sets available with
Chest and Cabinet

116-pc. Set,
Chest, Cabinet

\$279.99
outfit

147-pc. Set,
Chest, Cabinet

\$354.99
outfit

116-PIECE SET
Separate prices \$219.09
total **\$174.00** Set

OUTFIT COMPOSITION:

1/4-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 6-pt. sockets (3/16 thru 1/2-in.); 2 extension bars (3, 6-in.); Permanex® polyethylene case.

3/8-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; seven 12-pt. sockets (3/8 thru 3/4-in.); eight 12-pt. deep sockets (3/8 thru 1 1/8-in.); 3/8-in. spark plug socket; universal joint; 3 extension bars (3, 6, 10-in.).

1/2-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; twelve 12-pt. sockets (7/16 thru 1 1/8-in.); 1 1/8-in. spark plug socket; 2 extension bars (6, 10-in.).

Wrenches: 14 combination (5/16 thru 1-in.); 10-pc. comb. ignition wrench set; 8-in. adj. wrench.

Miscellaneous Parts: 14-pc. hex key set, 5-pc. magnetic insert set;

ignition gauge; 2 Phillips, 4 standard screwdrivers; 2 punches; ignition pliers; slip joint pliers; hacksaw, 10 extra blades.

2-drawer Chest: Same construction as chests on p. 70-71. 26x10 1/4 x 11 3/4 inches high.

1-drawer Cabinet with shelf: Same construction as cabinets on p. 70-71. 26 1/2 x 18 x 32 1/2 inches high.

ORDER INFO: Warranty and construction features on facing page.

Set, Chest, Cabinet. Wt. 106 lbs.
9 GT 43469N3\$279.99

116-pc. Tool Set alone. Wt. 22 lbs.
9 GT 33045C\$174.00

Tool Set plus Chest. Wt. 59 lbs.
9 GT 43466C2\$219.99

Chest alone. Wt. 37 lbs.
9 GT 65251C\$52.99

Cabinet alone. Wt. 47 lbs.
9 GT 65331N\$69.99



46 OTHER PIECES

28 WRENCHES

1/4-IN. DRIVE:
18 Sockets,
5 Accessories

1/2-IN. DRIVE:
16 Sockets,
4 Accessories

1/2-IN. DRIVE:
24 Sockets,
6 Accessories

147-PIECE SET

Separate prices \$306.00
total **\$249.00** Set

OUTFIT COMPOSITION:

1/4-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 6-pt. sockets (3/16 thru 1/2-in.); nine 6-pt. deep sockets (3/16 thru 1/2-in.); flex T-handle; 2 ext. bars (3, 6-in.); Permanex® case.

3/8-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; seven 12-pt. sockets (3/8 thru 3/4-in.); eight 12-pt. deep sockets (3/8 thru 1 1/8-in.); 3/8-in. spark plug socket; 3 extension bars (3, 6, 10-in.).

1/2-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; twelve 12-pt. sockets (7/16 thru 1 1/8-in.); eleven 12-pt. deep sockets (7/16 thru 1 1/8-in.); 1 1/8-in. spark plug socket; flex T-handle; universal joint; 3 ext. bars (3, 6, 10-in.).

Wrenches: 14 combination (5/16 thru 1-in.); 3 short box-end (1/2 x 3/4, 3/4 x 7/8, 7/8 x 1); 10-piece combination ignition wrench set; 8-inch adjustable wrench.

Miscellaneous Parts: 14-piece hex key set; 5-piece magnetic insert set; 12-ounce ball pein hammer; ignition gauge; 3 Phillips, 4 standard screwdrivers; 5-piece punch and chisel set; ignition pliers; slip joint pliers; hacksaw with 10 extra blades.

2-drawer Chest: Same construction as chests on p. 70-71. 26x10 1/4 x 11 3/4 in.

1-drawer Cabinet with shelf: Same construction as cabinets on p. 70-71. 26 1/2 x 18 x 32 1/2 inches high.

ORDERING INFORMATION:
See warranty and construction features on facing page.

Tool Set, Chest and Cabinet.
9 GT 43478N3—Wt. 115 lbs. . \$354.99

147-pc. Tool Set alone.
9 GT 33071C—Wt. 31 lbs.\$249.00

Tool Set plus Chest.
9 GT 43477C2—Wt. 68 lbs. . \$289.99

On these 2 pages... CRAFTSMAN STANDARD-SIZE Mechanics' Tool Sets with 3 drive sizes: 1/4, 3/8 and 1/2-inch square drive

CRAFTSMAN® HAND TOOL FULL UNLIMITED WARRANTY

If any CRAFTSMAN Hand Tool fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement.



42 WRENCHES

13-PC. TAP AND DIE SET

65 OTHER PIECES

1/4-IN. DRIVE:
18 Sockets,
6 Accessories

3/8-IN. DRIVE:
23 Sockets,
6 Accessories

1/2-IN. DRIVE:
24 Sockets,
6 Accessories

203-PIECE TOOL SET

Separate prices
total \$442.22 **\$389.00**

Tool Set plus
Chest and Cabinet **\$549.00**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance.

OUTFIT COMPOSITION:

1/4-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 6-pt. sockets (3/16 thru 1/2-in.); nine 6-pt. deep sockets (3/16 thru 1/2-in.); universal joint; 6-in. flex T-handle; 2 extension bars (3, 6-in.); Permanex® plastic case.

3/8-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; seven 12-pt. sockets (3/8 thru 3/4-in.); eight 12-pt. deep sockets (3/8 thru 3/4-in.); seven 6-pt. flex sockets (3/8 thru 3/4-in.); 3/8-in. spark plug socket; universal joint; 3 extension bars (3, 6, 10-in.); 10-in. flex T-handle.

1/2-in. Sq. Drive Parts: Fine-tooth, quick-release reversible ratchet; twelve 12-pt. sockets (1/2 thru 1 1/8-in.); eleven 12-pt. deep sockets (1/2 thru 1 1/8-in.); 1 1/8-in. spark plug socket; universal joint; 3 ext. bars (3, 6, 10-in.); 15-in. flex T-handle.

Wrenches: 14 combination wrenches (1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1-in.); 3 short box-end wrenches (1/2x3/16, 5/8x3/4, 3/4x7/16-in.); 3 flare-nut wrenches (1/2x9/16, 5/8x11/16, 3/4x7/16-in.); 3 tappet wrenches (1/2x9/16, 5/8x11/16, 3/4x7/16-in.); 8-pc. open-end ignition wrench set; 10-pc. combination ignition wrench set; 8-in. adjustable wrench.

Miscellaneous Parts: 13-pc. tap and die set; 14-pc. hex key set; 7 nut drivers (3/16, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2-in.); 5-pc. magnetic insert set; 16-in. rolling wedge bar; 12-oz. ball peen hammer; ignition gauge; 4 Phillips screwdrivers (Nos. 1, 2, 3, No. 2 stubby); 4 standard screwdrivers (3/16x4, 1/4x6, 5/16x8, stubby); 12-pc. punch and chisel set; diagonal cutting pliers; ignition pliers; 10-in. locking pliers; slip-joint pliers; Arc Joint® pliers; hacksaw with 10 extra blades.

3-drawer Chest: See (12) described on page 70.

3-drawer Cabinet: See (11) described on page 70.

ORDERING INFORMATION: See warranty above.

9 GT 43422N3—Tool Set, Chest, Cabinet, Wt. 195 lbs. \$549.00

9 GT 43421L2—Tool Set plus Chest, Wt. 100 lbs. 459.00

9 GT 33072L—203-pc. Tool Set alone, Wt. 45 lbs. Set 389.00





262-PIECE TOOL SET

Separate prices
total \$552.34 **\$489⁰⁰**

Tool Set plus
Chest and Cabinet **\$689⁰⁰**

CONSTRUCTION: Every CRAFTSMAN flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen for its overall toughness. Heat-treated, then oil-quenched and tempered to uniformly “through-harden” tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance.

OUTFIT COMPOSITION:

1/4-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; nine 6-point sockets (3/16 thru 1/2-inch); six 12-point sockets (3/32 thru 1/2-inch); 2 extension bars (3 and 6-inch); 6-inch flex T-handle; cross bar; 4 1/2-inch slide bar; Perma-nex® plastic case.

3/8-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; eight 12-point sockets (sizes 3/8 thru 1 1/16-inch); five 8-point sockets (sizes 1/4 thru 1/2-inch); eight 12-point deep sockets (3/8 thru 1 1/16-inch); five 12-point flex sockets (sizes 3/8 thru 3/4-inch); No. 2 Phillips bit; universal joint; 3 extension bars (3, 6, 10-inch); 16-inch speeder; 7-inch slide bar; cross bar; 10-inch flex T-handle.

1/2-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; fourteen 12-point sockets (3/16 thru 1 1/4-inch); eleven 12-point deep sockets (1/2 thru 1 1/16-inch); universal joint; 4 extension bars (3, 6, 10, 20-inch); 18-inch speeder; 9-inch slide bar; cross bar; stud extractor; 15-in. flex T-handle.

Wrenches: 8 open-end wrenches (1/4x3/16, 3/8x7/16, 1/2x9/16, 19/32x11/16, 5/8x7/4, 1 1/16x29/32, 3/4x7/8 and 1 5/16x1-inch); 6 combination wrenches (7/16, 1/2, 9/16, 5/8, 1 1/16 and 3/4-inch); 7 long box-end wrenches (3/8x7/16, 1/2x9/16, 3/4x5/8, 19/32x25/32, 1 1/16x13/16, 3/4x7/8 and 1 5/16x1-inch); 3 short box-end wrenches (1/2x9/16, 3/8x3/4 and 3/8x7/16-inch); 2 ratcheting box-end wrenches (3/8x7/16, 1/2x9/16); 3 tappet wrenches (1/2x9/16, 3/8x11/16 and 3/8x7/16-inch); 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 8-inch adjustable wrench.

Miscellaneous Parts: 59-piece tap and die set . . . taps and dies cut 23 sizes; 14-piece hex key set; variable-size nut driver; 5-piece magnetic insert set; 2 ball pein hammers (8 and 12-oz.); ignition gauge; three Phillips screwdrivers (Nos. 1, 2 and 3); offset screwdriver; 4 standard screwdrivers (sizes 3/16x4, 1/4x6, 5/16x8 and stubby); 12-inch pick-up tool; 12-inch line-up punch; 12-piece punch and chisel set; cotter key extractor; long-nose pliers; 10-inch locking pliers; Arc Joint® pliers; brake adjusting tool; hacksaw with 10 extra hacksaw blades.

6-drawer Chest: See (14) described on page 70.

5-drawer Cabinet: See (13) described on page 70.


ORDERING INFORMATION: See warranty on page 64.

9 GT 43424N3—Tool Set, Chest, Cabinet. Wt. 230 lbs. \$689.00

9 GT 43423L2—Tool Set plus Chest. Wt. 123 lbs. 569.00

9 GT 33035L—262-pc. Tool Set alone. Wt. 63 lbs. 489.00



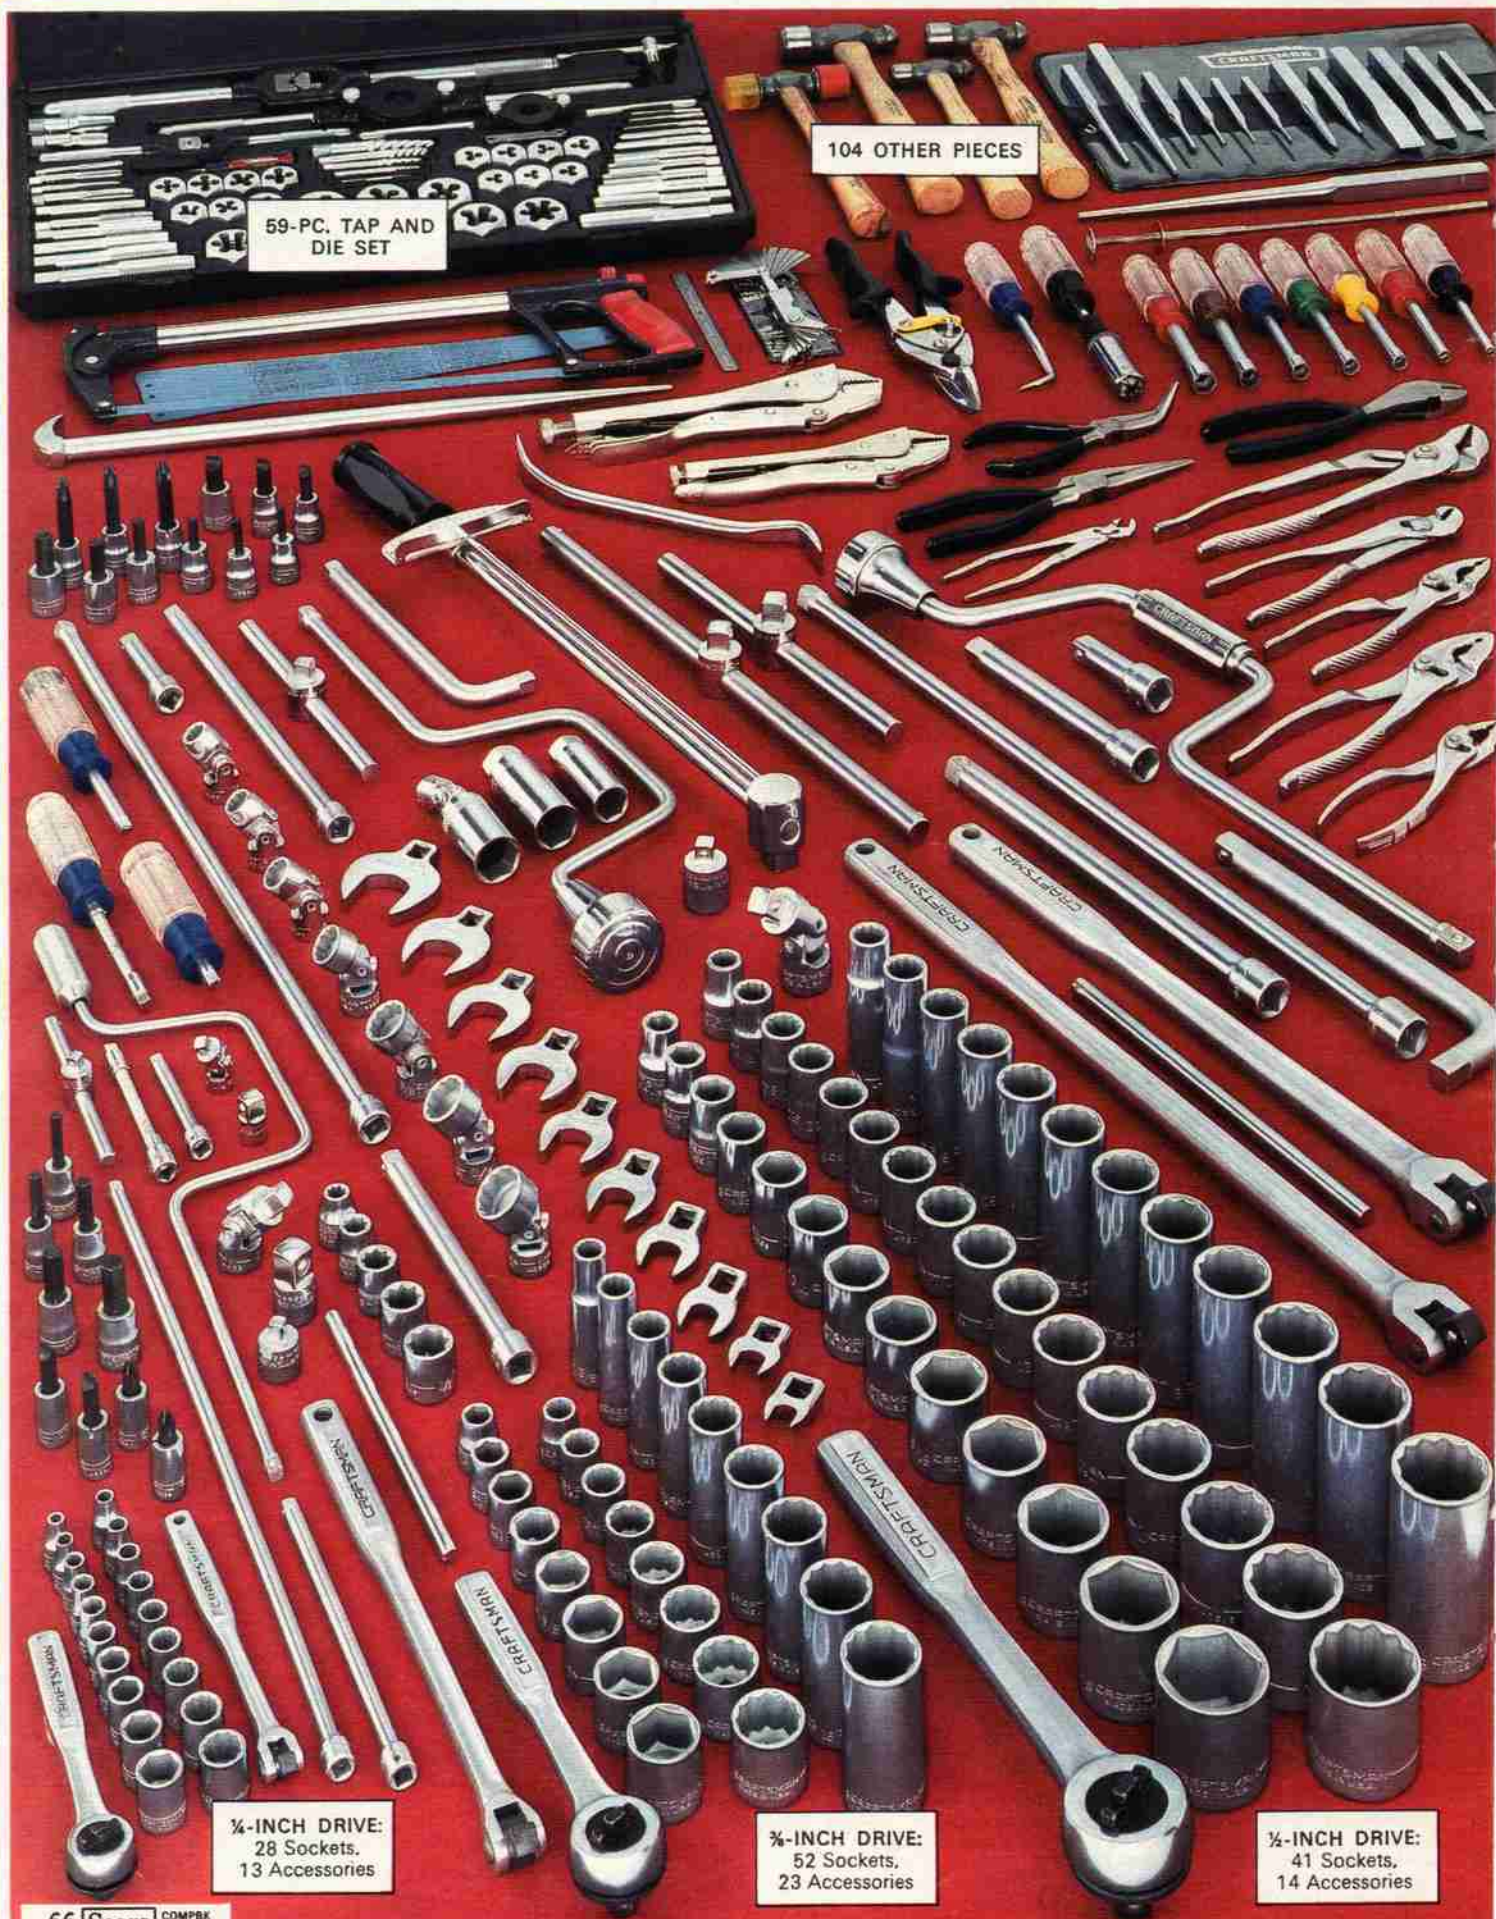

59-PC. TAP AND
DIE SET


104 OTHER PIECES

1/4-INCH DRIVE:
28 Sockets,
13 Accessories

3/8-INCH DRIVE:
52 Sockets,
23 Accessories

1/2-INCH DRIVE:
41 Sockets,
14 Accessories

Set with 3 drive sizes: 1/4, 3/8, 1/2-inch square drive

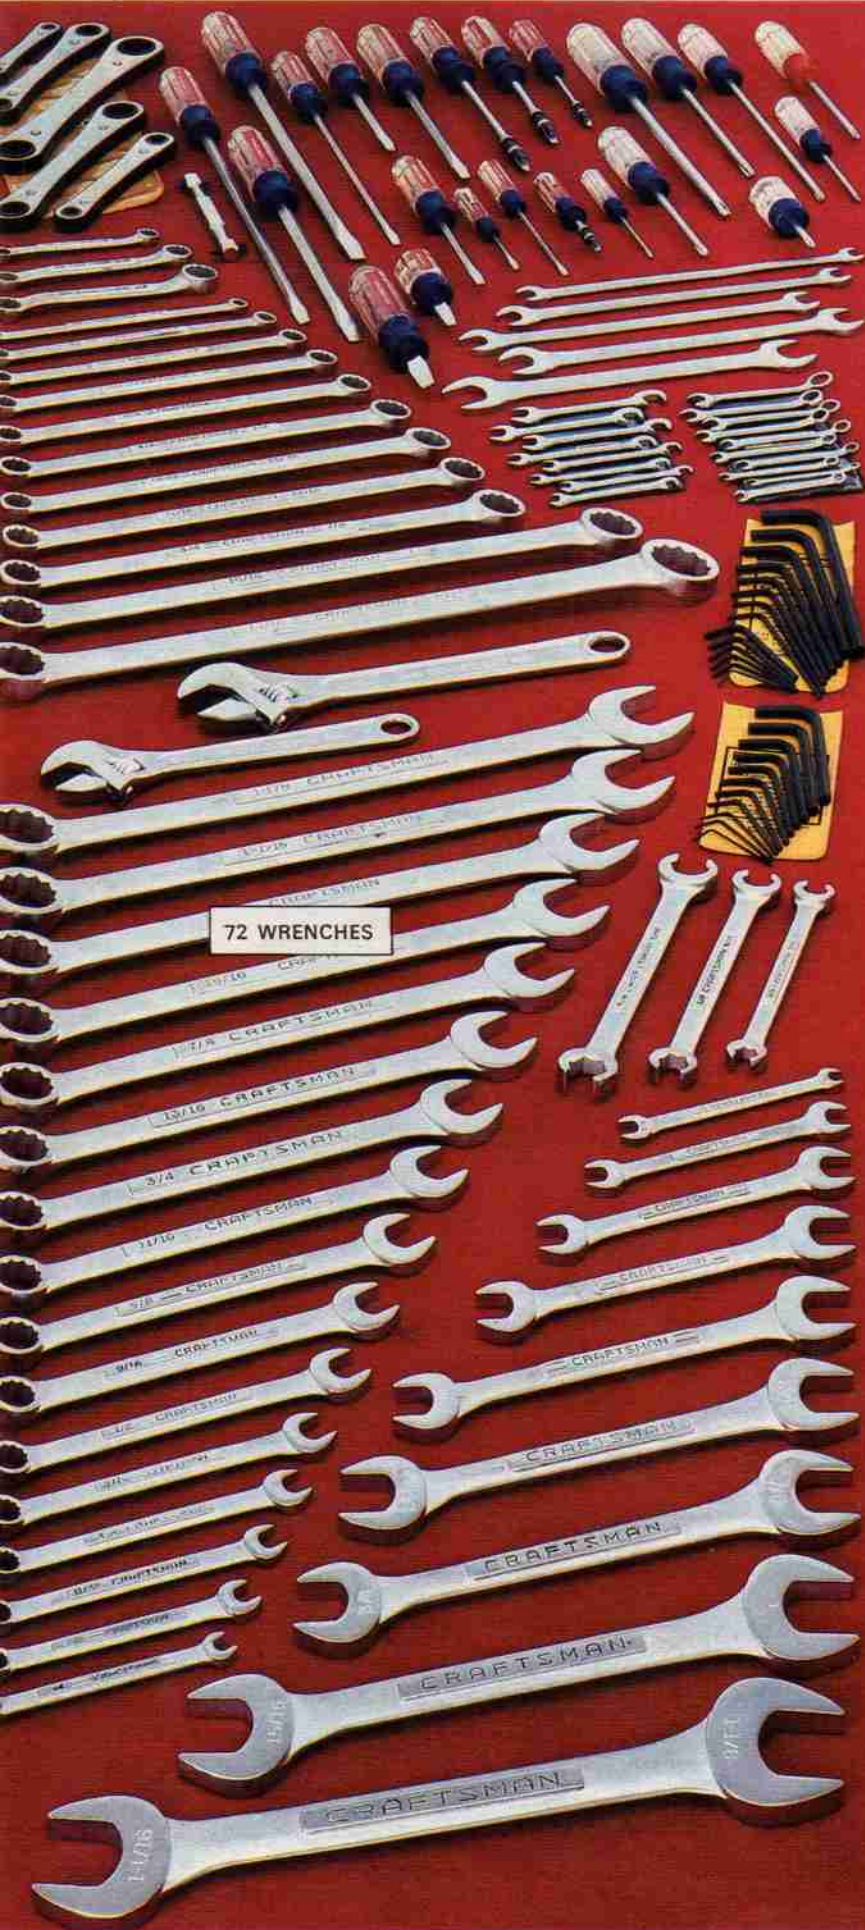

**CRAFTSMAN®
HAND TOOL FULL
UNLIMITED WARRANTY**

If any Craftsman Hand Tool fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement.

406-PIECE SET

Tool Set alone

Save \$261.72

Separate prices
total \$986.72

\$725⁰⁰

Tool Set plus Chest and Cabinet

Save \$61.98 more . . .
total savings \$323.70

Prices total **\$949⁰⁰**
\$1,010.98



CONSTRUCTION: Every Craftsman flat wrench, socket, ratchet, ratchet accessory is made from a select molybdenum alloy steel—specially chosen because of its strength and resistance to brittleness. Heat-treated, oil-quenched, tempered for uniform hardness. Nickel-chrome plated.

OUTFIT COMPOSITION:

1/4-inch Square Drive Parts: Fine-tooth, quick-release reversible ratchet; ten 6-pt. sockets (5/16 thru 1/2-in.); nine 12-pt. sockets (3/16 thru 1/2-in.); 5 hex bit sockets (3/16 thru 3/8-in.); 2 screwdriver bits (.030, .039); 2 Phillips bits (No. 1, No. 2); universal joint; socket drive adapter (1/4 to 3/8-in.); 2 socket extensions (4 1/2, 6-in.); 4 1/2-in. flex extension; speeder; 3 extension bars (3, 6, 14-in.); 6-in. flex T-handle; 4 1/2-in. slide bar; flex spinner.

3/8-in. Square Drive Parts: Fine-tooth, quick release reversible ratchet; eight 6-pt. sockets (3/8 thru 1 1/16-in.); five 8-pt. sockets (1/4 thru 1/2-in.); eight 12-pt. sockets (3/8 thru 1 1/16-in.); nine 12-pt. deep sockets (3/8 thru 7/8-in.); seven 12-pt. flexible sockets (3/8 thru 3/4-in.); three 6-pt. spark plug sockets (3/8-in. regular, 1 1/16-in. regular; flexible); 6 hex bit sockets (3/8 thru 3/4-in.); 3 screwdriver bits (.030, .039, .055); 3 Phillips bits (Nos. 2, 3, 4); 4 extension bars (3, 6, 10, 20-in.); universal joint; 2 socket drive adapters (3/8 to 1/2-in., 3/8 to 1/2-in.); ell handle; 16-in. speeder; 7-in. slide bar; 10-in. flex T-handle; crossbar; 10 crawfoot wrenches (3/8 thru 1 in.)

1/2-in. Square Drive Parts: Fine-tooth, quick-release reversible ratchet; thirteen 6-pt. sockets (7/16 thru 1 1/4-in.); sixteen 12-pt. sockets (7/16 thru 1 1/4 in.) twelve deep 12-pt. sockets (1/2 thru 1 1/8-in.); universal joint; socket drive adapter (1/2 to 3/4-in.); 4 extension bars (3, 6, 10, 20-in.); 2 slide bars (9, 15-in.); ell handle; 18-in. speeder; 2 flex T-handles (15, 18-in.); crossbar.

Wrenches: 16 combination wrenches (1/4 thru 1 1/8-in.); 9 open-end wrenches (1/4x3/16 thru 1 1/16x1 1/4); 11 box-end wrenches (1/4x3/16 thru 1 1/16x1 1/4); 3 short box-end wrenches (3/8x7/16 thru 3/4x3/4); 5 tappet wrenches (3/8 thru 7/8-in.); 3 flare nut wrenches (3/8x7/16 thru 3/4x1 1/16); 8-pc. open-end ignition wrench set; 2 adjustable wrenches (8, 10-in.); 5-pc. ratcheting box-end wrench set; 10-pc. combination ignition wrench set.

Miscellaneous Tools: 7 nut drivers (3/16 thru 1/2-in.); variable-size nut driver; 11 standard-size screwdrivers (1/16x2 thru 5/16x8); Reed Prince screwdriver; 7 Phillips screwdrivers (Nos. 0, 1, 4 and 8-in. No. 2, No. 2 stubby, No. 3, No. 4); off-set screwdriver; 4 screw-holding drivers (1/2x2 1/2, 4-in., 3/16x5 and 7-in.); 12-in. pick-up tool; bent needle-nose pliers; battery pliers; long chain-nose pliers; ignition pliers; diagonal cutting pliers; Arc Joint® pliers; 2 locking pliers (7 1/2, 10-in.); 3-slip-joint pliers (6 3/4, 8-in., thin-nose); 3 ball-pein hammers (4, 8, 12-oz.); 8-oz. plastic-tip hammer; 14-pc. combination hex-key set; 11-pc. short-arm hex key set; ignition gauge; brake adjusting tool; hacksaw plus 10 extra blades; rolling wedge bar; stainless steel rule; cotter key extractor; compound leverage snips; 12-in. line-up punch; 12-pc. punch, chisel set; torque wrench; 59-pc. tap and die set.

10-drawer Chest: See item keyed (16) on page 71.

10-drawer Cabinet: See item keyed (15) on page 70.

ORDERING INFORMATION: See warranty above.

9 GT 46323N—Tool Set alone. Wt. 105 lbs. . . Set \$725.00

9 GT 46352N3—Complete Outfit. Wt. 332 lbs. . . \$949.00

**Sears Has a Credit Plan
to Suit Most Every Need**

See Big Book or ask for details

59-PC. TAP
AND DIE SET

137 OTHER
PIECES

1/2-INCH DRIVE:
Parts include 37
standard, 20 metric
sockets and 10
accessories

3/4-INCH DRIVE:
Parts include 54
standard, 53 metric
sockets and 21
accessories

1/2-INCH DRIVE:
Parts include 44
standard, 31 metric
sockets and 12
accessories

Tool Set... the largest we've ever offered



72 METRIC
WRENCHES

85 STANDARD
WRENCHES

CRAFTSMAN® HAND TOOL FULL UNLIMITED WARRANTY

If any CRAFTSMAN Hand Tool fails to give complete satisfaction, return it to any Sears store throughout the United States for a free replacement*

635-PIECE SET

Tool Set alone prices total \$1601.25

Save \$502.25 \$1099⁰⁰

Tool Set plus Chest (1) and Cabinet (2)
prices total \$1424.98

Save \$75.98 more... total savings \$578.23
\$1349⁰⁰



Tool Set plus Chest (1), Cabinet (2) and Cart (3)
prices total \$1508.99

Save \$19.99 more... total savings \$598.22
\$1489⁰⁰

With this wide selection of Standard and Metric tools, it's possible to perform more automotive repairs than with any other set we sell. And you'll never have to pay for replacing any of these tools... they're all backed by our famous full unlimited warranty... see above.

CONSTRUCTION: Every CRAFTSMAN® flat wrench, socket, ratchet and ratchet accessory is made from a select molybdenum alloy steel—specially chosen for its overall toughness and strength. Heat-treated, then oil-quenched and tempered to uniformly "through-harden" tools so there are no inner soft spots. Nickel-chrome plating adds rust and corrosion resistance. You'll get tools that are tough to break because we make them tough.

SET COMPOSITION:

1/4-inch square drive parts: Ten 6-point standard sockets (3/8 thru 1/2-inch); nine 6-point standard deep sockets (3/8 thru 1/2-inch); nine 12-point standard sockets (3/8 thru 1/2-inch); nine 6-point metric sockets (4 thru 12mm); eleven 6-point metric deep sockets (4 thru 14mm); fine-tooth, quick-release reversible ratchet; universal joint; socket adapter (3/8-inch); 4 screwdriver bits (Phillips Nos. 1, 2, .030, .039); 5 hex bit sockets (3/16 thru 3/8-inch); flex extension; 6-inch socket extension; 4 extension bars (1 1/2, 3, 6, 14-inch); 6-inch flex T-handle.

3/8-inch square drive parts: Eight 6-point standard sockets (3/4 thru 1 1/8-inch); eight 12-point standard sockets (3/4 thru 1 1/8-inch); five 8-point standard sockets (1/2 thru 1 1/2-inch); nine 12-point standard deep sockets (3/4 thru 1 1/2-inch); seven 6-point standard flex sockets (3/4 thru 1 1/2-inch) plus tray; two 6-point flex spark plug sockets (3/4, 1 1/8-inch); two 6-point spark plug sockets (3/8, 1 1/8-inch); nine 6-point metric sockets (9 thru 19mm); eleven 12-point metric sockets (9 thru 19mm); eleven 6-point metric deep sockets (9 thru 19mm); eleven 12-point metric deep sockets (9 thru 19mm); ten 6-point metric flex sockets (10 thru 19mm) plus tray; fine-tooth, quick-release, reversible ratchet; universal joint; 2 socket adapters (1/4, 1/2-inch); 3 screwdriver bits (.030, .039, .055); quick-release flex ratchet; 5 extension bars (1 1/2, 3, 6, 10, 20-inch); 10-inch flex T-handle; 3 Phillips screwdriver bits (Nos. 2, 3, 4); 6 hex bit sockets (3/16 thru 3/8-inch); 10 crow-foot wrenches (3/8 thru 1-inch).

1/2-inch square drive parts: thirteen 6-point standard sockets (7/16 thru 1 1/4 inches); six 8-point standard sockets (7/16 thru 3/4-inch); thirteen 12-point standard sockets (7/16 thru 1 1/4-inch); eleven 12-point standard deep sockets (1/2 thru 1 1/4-inch); 1 1/8-inch, 6-point spark plug socket; ten 6-point metric sockets (9 thru 22mm); sixteen 12-point metric sockets (9 thru 32mm); five 12-point metric deep sockets (14 thru 27mm); fine-tooth, quick-release, rev. ratchet; universal joint; socket adapter (3/8-inch); 5 ext. bars (2, 3, 6, 10, 20-inch); 2 flex T-handles (15, 18-in.); stud extractor; quick-release, flex ratchet.

Standard Wrenches: 6-piece combination socket and open-end wrench set; 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 3-piece flare nut wrench set; 3 short box-end wrenches (1/2x3/16, 3/4x3/4, 3/4x7/16-in.); 12 long box-end wrenches (1/4x1/16 thru 1 1/4x1 1/2-in.); 5 tappet wrenches (3/8x7/16 thru 3/4x7/8-in.); 12 open-end wrenches (1/4x3/16 thru 1 1/2x1 1/8-in.); 18 combination wrenches (1/4 thru 1 1/2-in.); 5-piece ratcheting box-end wrench set; 3 adjustable wrenches (6, 8, 10-in.).

Metric Wrenches: 8-piece open-end ignition wrench set; 10-piece combination ignition wrench set; 5-piece flare nut wrench set; 25 combination wrenches (6 thru 32mm); 12 box-end wrenches (6x8 thru 27x30mm); 12 open-end wrenches (6x8 thru 28x30mm).

Miscellaneous Parts: 59-piece tap and die set; 7-piece standard nut-driver set; 7-piece metric nut-driver set; 14-piece standard hex key set; 14-piece metric hex key set; 11-piece standard hex key set; 5-piece magnetic insert set; 16-inch rolling wedge bar; ignition file; 2 half round files (8, 10-inch); 6-inch round file; 10-inch mill file; scratch awl; 8-ounce plastic tip hammer; 3 ball pein hammers (4, 8, 12-ounce); 6-inch rule; ignition gauge; metric feeler gauge; non-magnetic feeler gauge; gap gauge; screwholding starter; offset screwdriver; 7 Phillips screwdrivers (Nos. 0, 1, 2, 2x8, 3, 4, No. 2 stubby); 11 standard screwdrivers (1/2x2, 3/16x4, 3/16x9, 1/4x4, 1/4x6, 1/4x12, 3/4x1 1/4, 3/4x8, 3/4x12, 1/2x4, stubby); 12-inch pick-up tool; compound leverage snips; 12-inch line-up punch; 12-piece punch and chisel set; cotter key extractor; 1/2-inch square drive torque wrench; bent needle-nose pliers; battery pliers; diagonal cutting pliers; long chain-nose pliers; ignition pliers; 2 locking pliers (7 1/2, 10-inch); thin-nose pliers; slip-joint pliers; 8-inch slip-joint pliers; Arc Joint pliers; brake adjusting tool; brake spring pliers; gasket scraper; hose clamp pliers; hacksaw with 10 extra blades.

635-piece Mechanics' Tool Set alone.

ORDERING INFO: See CRAFTSMAN® Hand Tool Full Unlimited Warranty above. Shipping weight 171 pounds.

9 GT 46343N.....Set \$1099.00

Tool Set with 12-drawer Chest (1) and 12-drawer Cabinet (2). For full description, see Chest (9 GT 65258) and Cabinet (9 GT 65022) on page 71.

ORDERING INFORMATION: See warranty above.

9 GT 46351N3—Shipping weight 413 pounds.....\$1349.00

Tool Set with 12-drawer Chest (1), 12-drawer Cabinet (2) and Mobile Tool Cart (3). For full description, see Chest (9 GT 65258) and Cabinet (9 GT 65022) on page 71. See Mobile Tool Cart (9 GT 65214) on page 70.

ORDERING INFORMATION: See warranty above.

9 GT 46353N5—Shipping weight 532 pounds.....\$1489.00

COMPRK LAEGJD **Sears** 69

**Load 'em up, push 'em around...
these CRAFTSMAN® Tool Chests and
Cabinets withstand rough handling,
even when packed with heavy loads**



**(1) CRAFTSMAN®
Tool Cart**

Carries ½ ton, holds any cabinet on these 2 pages except 9 GT 65041.

DIMENSIONS: Overall 43½x20½x34 in. high. Platform 20x29 in. long. Two drawers 12½x16½x3¾ in. deep. Lower compartment 12½x20½x16 in. high; front panel slides into cabinet.

CONSTRUCTION: Heavy-gauge steel. Chrome-plated crossbar. Two 10-in. steel-rimmed ball bearing wheels with solid rubber tires, two 5-in. swivel casters with toe brakes. Wheels can be mounted as shown or at each corner. Tumbler lock for drawers, cabinet; 2 keys.

FINISH: Red enamel.

ORDERING INFO: Wt. 119 lbs.
9 GT 65214N2 \$159.99

**(2) CRAFTSMAN®
Hang-on Cabinet**

Hang on the end of any cabinet on these 2 pages, or bolt to any flat surface (bolts not included).

DIMENSIONS: Cabinet 17½x10½x29½ in. high.


CONSTRUCTION: Heavy-gauge steel. Door has full-length piano-type hinge, tumbler lock with 2 keys.

SHELVES: 2 steel shelves adjustable at 2-inch intervals. Mount with flat surface up, or mount turned over for a pan-type shelf with 1½-inch turned edge.

FINISH: Red enamel.

ORDERING INFORMATION: See "N" suffix note on page 92.

Shipping weight 33 lbs.
9 GT 65245N \$49.99

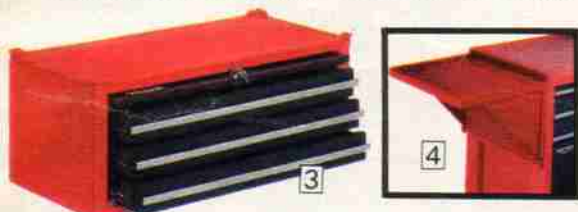

(3) Three-drawer Add-on Chest. Fits between chests, cabinets on these 2 pages except under (20). Steel. Front panel covers drawers. Tumbler lock, 2 keys.

DIMENSIONS: Overall 26½x12½x10½ in. high. Drawers 10¼x2¼x22½ inches wide.

FINISH: Red, gray enamel.

ORDER INFO: Wt. 37 lbs.
9 GT 65215C \$55.99

(4) Folding Side Shelf
Attach to side or back of any cabinet on these 2 pages. Holds up to 70 pounds. Folds down when not in use. Steel. Support, braces included.

DIMENSIONS: ¾-in. edge; 17½x15½x14 in. high.

FINISH: Red enamel.

ORDERING INFO:

Shipping weight 10 lbs.
9 GT 65213 \$14.50



(5) Protective Mat for Cabinet Top. Black. Embossed vinyl. Measures 17½x26¼ inches.

ORDERING INFORMATION:

9 GT 65221—Wt. 1 lb. 13 oz. \$4.79



(6) Drawer Liner. Cork rubber ½-in. thick. With cutting instructions.

ORDERING INFORMATION:

For chests: 22½x21½ in. long.

9 GT 65217—Wt. 13 oz. \$4.89

For cabinets: 16½x9 in. long.

9 GT 65218—Wt. 1 lb. 5 oz. \$4.89



(7) Drawer Dividers. Pkg. of 4. Steel, red enamel finish. Spring-load.

ORDERING INFORMATION:

For chests: 1½x10½x12 in. long.

9 GT 7422—Wt. 1 lb. 1 oz. \$2.69

For cabinets: 16½ in. long. 2 each 1½

and 2½ in. high.


9 GT 7429—Wt. 2 lbs. 3 oz. \$3.19



(8) Tool Rack. 20-gauge steel, red enamel finish. 18 in. long. Hangs on tool cabinet. . . no screws needed.

ORDERING INFORMATION:

9 GT 65216—Wt. 1 lb. 9 oz. \$3.89



(9) Parts Tray. Polystyrene. Measures 7½x13½x12¼ in. long.

ORDERING INFORMATION:

9 GT 65211—Wt. 1 lb. 2 oz. \$1.89



2-drawer Chest

2.7 square feet

for storage

\$52⁹⁹

3-drawer Cabinet

7.7 square feet

for storage

\$98⁹⁹

(10) 2-drawer Chest

OVERALL SIZE: Chest measures 26½x10¼x11¼ inches high.

DRAWER SIZES: 8¾ in. from front to back, 22½ in. wide. One drawer 21½ in. deep, one drawer 31½ in. deep.

FINISH: Red and charcoal gray enamel.

ORDERING INFORMATION: Shipping weight 37 lbs.

9 GT 65251C \$52.99

(11) 3-drawer Cabinet

OVERALL SIZE: Cabinet 26½x18x32½ in. high.

DRAWER SIZES: 16¾ in. from front to back, 22½ in. wide. Two drawers 3½ in. deep, one 6½ in. deep. Lower compartment 23½x17½x12½ in. deep. . . . closing front panel slides into cabinet.

FINISH: Red and charcoal gray enamel.

ORDERING INFORMATION: Shipping weight 95 lbs.

9 GT 65053N \$98.99

3-drawer Chest

5 square feet

for storage

\$73⁹⁹

5-drawer Cabinet

12.9 square feet

for storage

\$123⁹⁹

(12) 3-drawer Chest

OVERALL SIZE: 26x12x14¾ inches high.

DRAWER SIZES: 10¾ inches from front to back, 22½ in. wide. One drawer 1½ in. deep, one 2½ in. deep, one 3½ in. deep. Removable tote tray 18½x7½x1½ inches deep.

FINISH: Red and charcoal gray enamel.

ORDERING INFORMATION: Shipping weight 55 lbs.

9 GT 65253L \$73.99

(13) 5-drawer Cabinet

OVERALL SIZE: Cabinet measures 26½x18x32½ inches high.

DRAWER SIZES: 16¾ in. from front to back, 22½ inches wide. Two drawers 3½ inches deep, one drawer 4½ inches deep, two drawers 6½ inches deep.

FINISH: Red and charcoal gray enamel.

ORDERING INFORMATION: Shipping weight 107 lbs.

9 GT 65054N \$123.99

6-drawer Chest

6.5 square feet

for storage

\$87⁹⁹

9-drawer Cabinet

17.8 square feet

for storage

\$172⁹⁹

(14) 6-drawer Chest

OVERALL SIZE: 26x12x14¾ inches high.

DRAWER SIZES: 10¾ inches from front to back. Top center drawer 4¾ in. wide, 1½ in. deep. Top side drawers 8 in. wide, 1½ in. deep. Two drawers 22½ in. wide, 1½ in. deep. One drawer 22½ in. wide, 2½ in. deep. Removable tote tray 18½x7½x1½ in. deep.

FINISH: Red and gray enamel.

ORDERING INFORMATION: Shipping weight 60 lbs.

9 GT 65256L \$87.99

(15) 9-drawer Cabinet

OVERALL SIZE: 26½x18x39½ inches high.

DRAWER SIZES: Four drawers 15½ in. from front to back, 10½ in. wide, 3½ in. deep. Five drawers 16¾ in. from front to back, 22½ in. wide; two 3½ in. deep, two 4½ in. deep, one 6½ in. deep.

FINISH: Red and gray enamel.

ORDERING INFORMATION: Shipping weight 150 lbs.

9 GT 65059N \$172.99

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

All Chests and Cabinets on these two pages made of reinforced heavy-gauge steel. Full-width drawer pulls for easier grasping. Let you use both hands to pull drawer straight out when loaded full of heavy tools. Chest tops, except (20), have flexible rods for hanging manuals, blueprints.

Four cabinet corner posts (not just 2 as found in ordinary construction) add extra bracing that firms the sides and gives support to the drawer slides, so they remain aligned under stress.

To prove cabinet drawers were made to last and last, they were loaded with 32 pounds of weight, then opened and closed 30,000 times (that's equal to plenty of hard use). Drawers and slides showed very little wear, with proper lubrication, even under such strenuous test conditions.

Sturdy "I-frame" cabinet construction with self-reinforcing recessed sides adds tremendous strength and stability. Tests showed 50% more resistance to diagonal stress than ordinary flat panel design.



10-drawer Chest

8.8 square feet for storage

\$112⁹⁹

6-drawer Cabinet

12.7 square feet for storage

\$147⁹⁹

12-drawer Chest

9.5 square feet for storage

\$127⁹⁹

12-drawer Cabinet

22.2 square feet for storage

\$197⁹⁹

(16) 10-drawer Chest

OVERALL SIZE: 26 $\frac{1}{2}$ x18x40 $\frac{1}{4}$ in. high. DRAWER SIZES: 10 $\frac{1}{2}$ in. front to back. One top center drawer 4 $\frac{1}{2}$ x32 in. wide, 6 $\frac{1}{2}$ in. deep. Six top side drawers 7 $\frac{1}{2}$ x32 in. wide, 1 $\frac{1}{2}$ in. deep. Three drawers 22 $\frac{1}{2}$ x32 in. wide: two 1 $\frac{1}{2}$ in. deep, one 2 $\frac{1}{2}$ in. deep. Removable tote tray 18 $\frac{1}{2}$ x7 $\frac{1}{4}$ x1 $\frac{1}{2}$ in. deep.

FINISH: Red and charcoal gray enamel. ORDERING INFORMATION: 9 GT 65257N—Wt. 77 lbs. ... **\$112.99**

(17) 6-drawer Cabinet

OVERALL SIZE: 26 $\frac{1}{2}$ x18x40 $\frac{1}{4}$ in. high. DRAWER SIZES: 16 $\frac{1}{4}$ in. front to back. Two top drawers 10 $\frac{1}{2}$ in. wide, 3 $\frac{1}{2}$ in. deep. Four drawers 22 $\frac{1}{2}$ in. wide: three 3 $\frac{1}{2}$ in. deep, one 6 $\frac{1}{2}$ in. deep. Lower compartment 23 $\frac{1}{2}$ x17 $\frac{1}{2}$ x12 $\frac{1}{2}$ in. deep. . . front panel slides into cabinet.

FINISH: Red and charcoal gray enamel. ORDERING INFORMATION: 9 GT 65056N—Wt. 130 lbs. ... **\$147.99**

5-drawer Cabinet (not shown). As above, except only one top drawer 22 $\frac{1}{2}$ in. wide, 3 $\frac{1}{2}$ in. deep. ORDERING INFO: Shpg. wt. 125 lbs. 9 GT 65055N ... **\$142.99**

(18) 12-drawer Chest

OVERALL SIZE: 26 $\frac{1}{2}$ x18x39 $\frac{1}{4}$ in. high. DRAWER SIZES: 10 $\frac{1}{2}$ in. front to back. Six top side drawers 7 $\frac{1}{2}$ in. wide, 1 $\frac{1}{2}$ in. deep. Three top center drawers 4 $\frac{1}{2}$ in. wide, 1 $\frac{1}{2}$ in. deep. Three drawers 22 $\frac{1}{2}$ x32 in. wide: two 1 $\frac{1}{2}$ in. deep, one 2 $\frac{1}{2}$ in. deep. Removable tote tray 18 $\frac{1}{2}$ x7 $\frac{1}{4}$ x1 $\frac{1}{2}$ in. deep.

FINISH: Red and charcoal gray enamel. ORDER INFO: Shpg. wt. 77 pounds. 9 GT 65258N ... **\$127.99**

(19) 12-drawer Cabinet

OVERALL SIZE: 26 $\frac{1}{2}$ x18x39 $\frac{1}{4}$ in. high. DRAWER SIZES: 16 $\frac{1}{4}$ in. front to back. Four top side drawers 7 $\frac{1}{2}$ in. wide, 2 in. deep. Locking top center drawer 4 $\frac{1}{2}$ in. wide, 4 $\frac{1}{2}$ in. deep. Seven drawers 22 $\frac{1}{2}$ in. wide: one 2 $\frac{1}{2}$ in. deep, five 3 $\frac{1}{2}$ in. deep, one 6 $\frac{1}{2}$ in. deep.

FINISH: Red and charcoal gray enamel. ORDERING INFORMATION: Shipping weight 165 pounds. 9 GT 65022N ... **\$197.99**

You get over 50% more square feet of storage capacity than with chest (18) and cabinet (19) at left

12-drawer Chest

17 square feet for storage

\$224⁹⁹

10-drawer Cabinet

31.5 square feet for storage

\$319⁹⁹

(20) 12-drawer Chest

OVERALL SIZE: 33 $\frac{1}{4}$ x15 $\frac{3}{4}$ x18 $\frac{3}{4}$ inches high.

DRAWER SIZES: 14 $\frac{1}{4}$ in. front to back. Six top side drawers 11 in. wide, 1 $\frac{23}{32}$ in. deep. Three top center drawers 5 $\frac{1}{2}$ in. wide, 1 $\frac{23}{32}$ in. deep. Three drawers 29 $\frac{1}{2}$ x16 in. wide: two 1 $\frac{21}{32}$ in. deep, one 2 $\frac{1}{2}$ in. deep. Removable tote tray 18 $\frac{1}{2}$ x7 $\frac{1}{4}$ x1 $\frac{1}{2}$ in. deep.

FINISH: Red, charcoal gray enamel. ORDERING INFORMATION: Shipping weight 145 pounds. 9 GT 65259N ... **\$224.99**

(21) 10-drawer Cabinet

OVERALL SIZE: Cabinet 33 $\frac{1}{2}$ x18 $\frac{1}{2}$ x41 in. high.

DRAWER SIZES: Measure 16 $\frac{1}{4}$ inches from front to back, 27 $\frac{1}{4}$ inches wide. Four drawers 17 $\frac{1}{2}$ inches deep, five drawers 3 $\frac{3}{32}$ inches deep, one 6 $\frac{1}{32}$ inches deep.

FINISH: Red and charcoal gray enamel. ORDERING INFORMATION: Shipping weight 184 lbs. 9 GT 65041N ... **\$319.99**

MORE ON THE NEXT PAGE. . TOOL BOXES ON PAGE 34

CRAFTSMAN® Tool Chests and Cabinets... built strong for rugged professional use



Cabinets (3) and (5) with 20% more diagonal strength than cabinets on previous 2 pages... that's the kind of strength needed for moving to and from the job site when loaded with heavy tools

8-drawer Chest \$64.75 | 2-drawer Chest \$39.99 | 7-drawer Cabinet \$179.99

(1) 8-drawer Chest
OVERALL SIZE, CAPACITY: 26 1/2 x 18 1/2 x 13 1/2 in. high. Drawers 7 1/4 in. front to back. Top center drawer 5 1/4 x 3 1/4 in. deep; 4 drawers 8 1/2 x 1 in. deep; one drawer 8 1/2 x 2 in. deep. Two drawers 24 1/2 in. wide: one 1 3/8 in. deep, one 2 1/4 in. deep.
CONSTRUCTION: Heavy-gauge steel, side handles. Full-length hinge. Close lid to lock drawers. Front panel pulls out, covers drawers. Tumbler lock, 2 keys. Brown wrinkle finish.
ORDERING INFORMATION: Shipping weight 42 lbs.
9 GT 65228L.....\$64.75

2-Chest and Cabinet Set. Includes (1), (2) and (3) above.
ORDERING INFORMATION: *Separate prices total \$284.73.*
9 GT 65301N3—Shipping weight 206 lbs.Set \$259.99

(2 and 3) CONSTRUCTION: Heavy-gauge steel. Side handles. Tumbler lock, 2 keys. Brown wrinkle finish. Casters on (3).

(2) 2-drawer Chest
OVERALL SIZE, CAPACITY: 28x9 3/4 x 7 3/4 in. high. Drawers 9 1/2 in. front to back; 24 1/4 in. wide: one 1 3/4 in. deep, one 3 3/8 in. deep.
ORDERING INFORMATION: 9 GT 65322C—Wt. 25 lbs.\$39.99

(3) 7-drawer Cabinet
OVERALL SIZE, CAPACITY: 28 3/4 x 18 1/2 x 35 1/2 in. high. Drawers 16 3/4 in. front to back, 22 1/4 in. wide: two 1 1/2 in. deep, three 3 1/8 in. deep, one 4 1/4 in. deep, one 6 3/8 in. deep.
ORDERING INFORMATION: 9 GT 65324N—Wt. 139 lbs.\$179.99

6-drawer Chest \$99.99 | 4-drawer Cabinet \$149.99

(4) 6-drawer Chest
OVERALL SIZE, CAPACITY: 26x12x14 7/8 in. high. Drawers 10 3/4 in. front to back. Five drawers 1 3/8 in. deep: one 4 3/4 in. wide, two 8 in. wide, two 22 1/2 in. wide. One drawer 2 7/8 in. deep, 22 1/2 in. wide. Removable tote tray 18 1/2 x 7 1/4 x 1 1/2 inches deep.
CONSTRUCTION: Heavy-gauge steel, side handles. Full-length hinge. Front panel on lid covers, locks drawers. Tumbler lock, 2 keys. Brown wrinkle finish.
ORDERING INFORMATION: 9 GT 65325L—Wt. 60 lbs. ...\$99.99

(5) 4-drawer Cabinet
OVERALL SIZE, CAPACITY: 28 3/4 x 18 1/2 x 35 1/2 in. high. 4 drawers 16 3/4 in. front to back, 22 1/4 in. wide: two 1 1/2 in. deep, one 3 3/8 in. deep, one 6 1/2 in. deep. Lower compartment 28 3/4 x 17 x 12 1/2 in. deep... front panel slides into cabinet.
CONSTRUCTION: Heavy-gauge steel, side handles. Tumbler lock, 2 keys. Casters. Brown wrinkle finish.
ORDERING INFORMATION: Shipping weight 114 pounds.
9 GT 65323N\$149.99

Chest and Cabinet Set. Includes (4) and (5) above.
ORDERING INFO: *Separate prices total \$249.98.* Wt. 174 lbs.
9 GT 65302N2Set \$229.98

7-drawer Chest \$52.75 | 2-drawer Chest \$34.99

(6) 7-drawer Chest
OVERALL SIZE, CAPACITY: 20 1/2 x 8 1/2 x 13 1/2 in. high. Drawers sizes: 7 1/4 in. from front to back. Four 8 1/2 in. wide, 1 in. deep. Two 18 1/8 in. wide; one 1 3/8 in. deep, one 2 1/4 in. deep. One 8 1/2 in. wide, 2 in. deep.
CONSTRUCTION: Heavy gauge steel. Top handle. Full length hinge. Drawers lock when lid is closed. Front panel pulls out, covers drawers, tumbler lock with 2 keys. 2 drawbolt latches. Brown wrinkle finish.
ORDERING INFORMATION: Shipping weight 30 pounds.
9 GT 65227C\$52.75

(7) 2-drawer Chest
OVERALL SIZE, CAPACITY: 21 1/2 x 9 3/4 x 7 3/4 in. high. Drawers 9 1/2 in. front to back, 17 13/16 in. wide: one 1 3/4 in. deep, one 3 3/8 in. deep.
CONSTRUCTION: Heavy-gauge steel. Side handles. Tumbler lock, 2 keys. Brown wrinkle finish.
ORDERING INFORMATION: Shipping weight 21 pounds.
9 GT 65321C\$34.99

See our complete selection of Tool Boxes on page 34

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details



(8) CRAFTSMAN® Tool Cart \$149.99 without handle


Carries up to 1/2 ton... holds one or two cabinets on this and previous 2 pages, depending on size of cabinets.
OVERALL SIZE: 27 3/16 x 58 3/16 x 9 in. high.
CONSTRUCTION: Heavy-gauge steel. Two 10-in. steel rimmed ball bearing wheels with solid rubber tires, two 5-in. swivel casters with toe brakes. Wheels can be mounted as shown or midpoint at front, back and sides.
PLATFORM SIZE: 27 x 58 in. long. Edge 1 1/2 in. high.
FINISH: Charcoal gray.
ORDERING INFO: Order handles separately.
9 GT 65202N—Shpg. wt. 91 lbs.\$149.99

(9 and 10) Handles for cabinets, cart

Drill holes in cabinets or cart to mount. Mounting bolts included.

(9) Handles for cabinets. Fit cabinets on this and previous 2 pages. Nickel-plated steel 8 1/2 in. high.
ORDERING INFO: Wt. 1 lb.
9 GT 65244\$3.99

(10) Handle for tool cart (8). Nickel-plated tubular steel 31 in. high, 1 7/8 in. wide.
ORDER INFO: Shpg. wt. 7 lbs. 12 oz.
9 GT 65243\$17.99

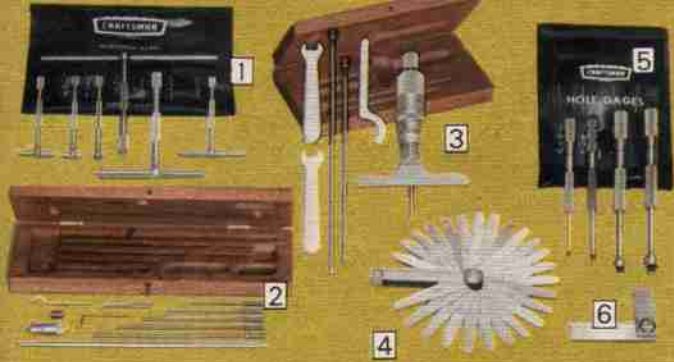

Craftsman® Specialty Gauge Sets and Squares

(1) Inside Gauge Sets.

CONSTRUCTION: High-grade tool steel. Head ends heat-treated for toughness. Telescoping plunger locks. For inside slots and holes.

CAPACITIES, ORDERING INFORMATION:

6-gauge set— $\frac{1}{16}$ to 6 in.
Shpg. wt. 14 oz.
9 GT 4027—Set \$42.99
4-gauge set— $\frac{1}{16}$ to 2½ in.
Shpg. wt. 6 oz.
9 GT 40203—Set \$26.75

(2) Inside Micrometer Sets.

CAPACITY: Standard—Range $\frac{1}{2}$ to 8½ inches in .001 inch graduations, Metric—Range 38 to 213 mm. in .01 mm. graduations.

CONSTRUCTION: Chrome-plated head. With setting and extension handles. Heads and mandrels hardened and ground for accuracy. Case included.

ORDERING INFORMATION:

Standard.
Shpg. wt. 1 lb. 4 oz.
9 GT 3864—Set \$42.99
Metric.
Shpg. wt. 1 lb. 10 oz.
9 GT 38642—Set \$44.99

(3) Depth Gauge Sets. Tool Steel, extensions are screw stock. Ends hardened, precision ground, lapped. Adjusting nut compensates for wear. Interchangeable rods easily inserted, held up by knurled cap. Case, lock.

CAPACITIES, ORDER INFO:

Standard—0 to 3 in. by .001 in.
9 GT 3863—Wt. 1 lb. 2 oz. . . . Set \$42.99
Metric—0 to 75 mm. by .01 mm.
9 GT 38623—Wt. 1 lb. 4 oz. . . . Set \$43.99

(4) Taper Leaf Gauge. 26 leaves taper to $\frac{1}{4}$ -inch, from .0015 to .025-in. thick. Steel.

ORDERING INFORMATION:

9 GT 4094—Shpg. wt. 6 oz. . . . \$6.99

(5) 4-pc. Small-hole Gauge Set. Oil hardened tool steel. $\frac{1}{8}$ to $\frac{1}{2}$ in. Plastic pouch included.


ORDERING INFORMATION:

9 GT 4056—Shpg. wt. 5 oz. . . . Set \$26.99

(6) Steel Squares. Ground and hardened. Beam and blade pinned solidly. Not scaled. From England.

ORDERING INFORMATION:

Catalog Number	Blade inch	Beam inch	Wt. oz.	Each
9 GT 40401	2½	1½	5	\$6.99
9 GT 40402	3½	2½	6	6.99
9 GT 40403	4	3	8	7.99
9 GT 40404	6	3½	14	8.99

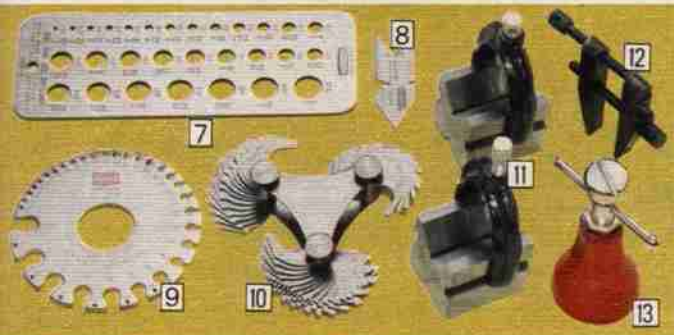

Gauges . . . Clamp Sets . . . Jack Screw

(7) CRAFTSMAN Drill Gauge. Polished steel. Measures 29 fractional sizes, $\frac{1}{16}$ to $\frac{1}{2}$ -in.

ORDERING INFORMATION:

9 GT 4049—Shpg. wt. 5 oz. . . . \$3.49

CRAFTSMAN Drill and Wire Gauge (not shown). Polished, hardened steel. Index for taps. Sizes 1 to 60.

ORDERING INFORMATION:

9 GT 4047—Shpg. wt. 5 oz. . . . \$3.49

(8) CRAFTSMAN Lathe-Center Gauge. Stainless steel. U.S. Standard 60°. Graduations at 14th, 20th, 24th, 32nd of an in.

ORDERING INFORMATION:

9 GT 40642—Shpg. wt. 2 oz. . . . \$2.99

(9) CRAFTSMAN Circular Gauge. Measures wire, sheet, plate sizes 0 to 36. Amer. Std. for non-ferrous metals. Steel.

ORDERING INFORMATION:

9 GT 4023—Shpg. wt. 6 oz. . . . \$7.99

(10) CRAFTSMAN V-thread Gauge. Pitches 4 to 84. Knurled, hardened and rolled steel. England.

ORDERING INFORMATION:

9 GT 4031—Shpg. wt. 5 oz. . . . \$14.99

(11) CRAFTSMAN 4-piece V-block and clamp set. Hardened tool steel V-blocks . . . precision ground for both square and parallel accuracy. V-blocks measure $1\frac{1}{2} \times 1\frac{1}{2} \times 1\frac{1}{2}$ -in. Clamps hold up to 1-inch round or irregular work material. Included in set are 2 V-blocks and 2 clamps.

ORDERING INFORMATION:

Shipping weight 2 lbs. 2 oz.

9 GT 4083—Set \$19.99

(12) Sears Toolmaker's Clamp. Parallel, case-hardened steel jaws $2\frac{1}{2}$ inches long. Spring clip. Measures 0 to 1 in.

ORDERING INFORMATION:

Shipping weight 5 ounces.

9 GT 4481—Set \$1.49

As above but 4-inch long jaws.

Measures 0 to 2 inches.

Shipping weight 12 ounces.

9 GT 4486—Set \$1.99

(13) Sears Jack Screw. Lifts 1000 pounds. 1-inch adjustment, 3 inches high when closed, 4 inches high, fully extended.

ORDERING INFORMATION:

Shipping weight 2 pounds.

9 GT 4088—Set \$2.19

CRAFTSMAN® Micrometers

Meet federal specifications for accuracy . . . made to tolerances of less than .0001 of an inch.

(14) Micrometer Sets

CONSTRUCTION: Steel and cast steel with polished spindle and anvil. Thread ground from steel spindle. Clearly marked graduations in .001 in.

ACCESSORIES: Includes lock. Carrying case.

Set of 4.

CAPACITY: Measures 0 to 4 inches in .001 in. With 3 checking standards.

ORDERING INFORMATION:

9 GT 3860—Wt. 4 lbs. 2 oz. . . . Set \$125.99

Set of 6.

CAPACITY: Measures 0 to 6 inches in .001 in. With 5 checking standards.

ORDERING INFORMATION:

9 GT 38608—Wt. 9 lbs. 8 oz. . . . Set \$234.99

Individual Standard Scale Micrometers graduated in .001 inches

RANGE, ORDERING INFORMATION:

Catalog Number	Range	Wt.		Each
		lbs.	oz.	
9 GT 38601	0-1 in.	9	22.99	
9 GT 38602	1-2 in.	12	29.99	
9 GT 38603	2-3 in.	14	34.99	
9 GT 38604	3-4 in.	1	4	39.99
9 GT 38605	4-5 in.	1	6	43.99
9 GT 38606	5-6 in.	1	13	47.99

Individual Metric Scale Micrometers

RANGE, ORDERING INFORMATION:

Cat. No.	Range	Wt.	Each
9 GT 38621	0-25 mm.	8 oz.	\$24.99
9 GT 38622	25-50 mm.	10 oz.	32.99

(15) Mandrel Micrometer gives wider range of measurement than regular micrometer . . . 0 to 4 in.

CONSTRUCTION: Strong steel frame. Satin-chrome-plated head, easy-to-read scale. Four interchangeable mandrels let one tool do work of 4 fixed-anvil micrometers. Graduated in .001 in.

ACCESSORIES: Includes 1, 2 and 3-in. checking standards, wrench for changing standards, and case.

ORDERING INFORMATION:

9 GT 38607—Wt. 2 lbs. 8 oz. . . . \$74.99

(16) Digit Depth Micrometer with easy-to-read digital counter for clear, more accurate readings.

CONSTRUCTION: $2\frac{1}{2}$ -inch base microlapped for accuracy. Base and thimble satin-chrome finished. Friction thimble for constant pressure. Positive locking clamp. Conventional sleeve thimble provided to double check digital counter. Includes 4 rods and fitted carrying case. From Japan.

CAP.: 4-in. range. Graduated in .001 in.

ORDERING INFORMATION:

9 GT 38645—Wt. 2 lbs. 2 oz. . . . \$54.95

(17) Metric/Inch Micrometer—our finest . . . reads millimeters and in. simultaneously for easy conversions.

CONSTRUCTION: Clearly-marked graduations on satin-chrome finished steel and cast steel. Carbide-tipped. With lock, speeder and heat insulators. Fitted case included. From Japan.

CAPACITY: Direct readings on digital counter to .01 mm. English Vernier scale to .0001 in. Size 0 to 1 in.

ORDERING INFORMATION:

9 GT 38666—Wt. 1 lb. 6 oz. . . . \$44.99

As above, but in inches only.

9 GT 38644—Wt. 1 lb. 3 oz. . . . 38.95

(18) Fixed-anvil Micrometers

CONSTRUCTION: Forged steel head, frame. Threads ground, polished. Carbide-tipped anvil and spindle. Plastic pouch included. Graduated in .0001 in. Decimal equivalents etched on frame.

CAPACITIES, ORDERING INFORMATION:

0 to 1 in.

9 GT 38662—Shpg. wt. 9 oz. . . . \$31.99






1 to 2 inches.

9 GT 38665—Shpg. wt. 12 oz. . . . 37.99

Graduated to .001 in. (not shown). 0 to 1 in. Ideal for apprentices. Not Craftsman. No case.

ORDERING INFORMATION:

9 GT 40701—Shpg. wt. 8 oz. . . . \$9.99

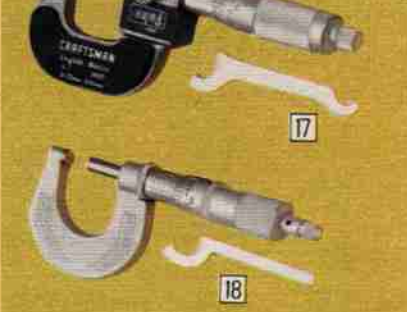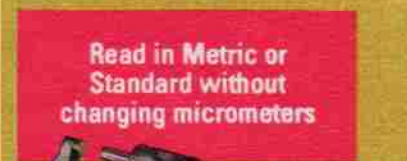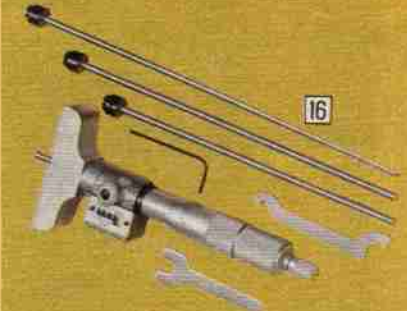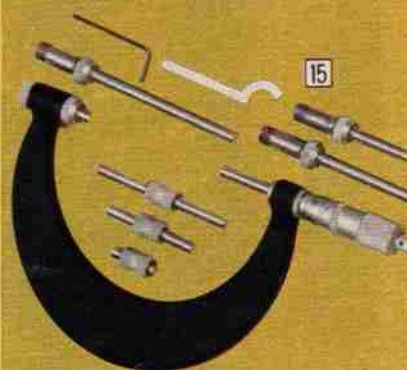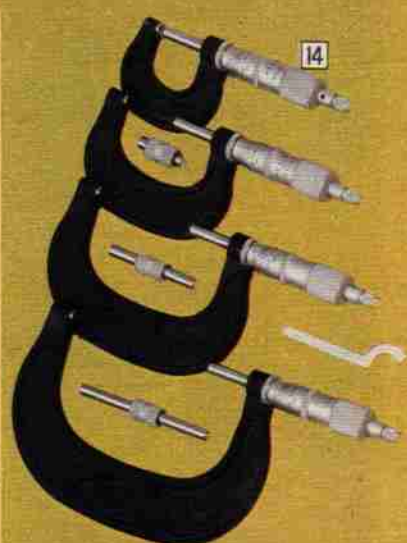

Read in Metric or Standard without changing micrometers

CRAFTSMAN® Calipers

Read easily, measure accurately to .001 in.



(1) Standard and Metric Dial Calipers

CONST: Stainless-steel, chrome-plated scales on beam. Read inside or outside. Depth rod. Adjustable bezel. 9 1/4-in. long. With case. Japan.

CAPACITIES, ORDER INFO: See warranty page 75.

Standard scale: 0 to 6 inches graduated in .001 in.

9 GT 40172—Shipping weight 1 lb. 4 oz. \$42.99

Metric scale: 0 to 150 mm in .05 mm

9 GT 38668—Shipping weight 1 lb. 13 oz. 47.95

(2) Standard/Metric Vernier Caliper

CONSTRUCTION: Stainless steel with chrome plated scales on recessed beam. Depth rod. Cam lock. 8-in. long. With storage case. From Japan.

CAPACITIES: Standard and metric scales from 0 to 6-in. in .001 in. and 0 to 150 mm in .05 mm.

ORDERING INFORMATION: See warranty pg. 75.

With adjustable plates

9 GT 40182—Shipping weight 10 ounces \$27.99

Without adjustable plates

9 GT 40181—Shipping weight 11 ounces 22.99

(3) Standard/Metric Vernier Caliper

CONST: Stainless steel, polished finish. Precision ground measuring faces. Scales on beam read from inside or outside. Automatic thumb lock. Depth rod. 8 3/4-in. long. With case. From Italy.

CAPACITIES: Standard and metric scales from 0 to 5 3/4 in. in .001 in. and 0 to 130 mm in .05 mm.

ORDERING INFORMATION: See warranty page 75.

9 GT 40257—Shipping weight 8 ounces \$16.99

(4) Standard and Standard/Metric Vernier Calipers

CONST: Tool steel, dulled chrome finish. Hardened adjustable jaws ground, precision lapped. Adjustable buffer plate for uniform jaw tension. Zero adjustment. Hardened recessed beams read from inside or outside. Points on beams, slides for setting dividers. Nibs 0.3-in. wide with jaws closed. Adjustment nut helps prevent backlash. Meet or exceed Fed. Specs. GGG-c111b for accuracy.

CAPACITIES: See chart below for range. Standard scales in .001-in., metric scales in .05 mm.

ORDERING INFO: See warranty page 75. Allow extra time for shipment from factory in St. James, Minn. Pay shipping and handling charges from your Distrib. Center. No C.O.D. orders.

Catalog Number	Range		Length of Jaws (in.)	Wt. lbs.	Price
	Standard	Metric			
F9 GT 40231	0-12 in.		2 1/4	4	\$138.00
F9 GT 40232	0-24 in.		2 7/16	9	215.00
F9 GT 40233	0-12 in.	0-300 mm	2 1/4	4	138.00
F9 GT 40234	0-24 in.	0-600 mm	2 7/16	9	215.00

CRAFTSMAN® Dividers, Calipers, Trammel, Scriber and Punch

(9 thru 11) Flat Leg Calipers, Dividers.

CONSTRUCTION: High quality tool steel legs machined to uniform length and balance. Adjustable.

TYPES, SIZES, ORDERING INFORMATION:

Item	Catalog No.	Size	Wt.	Price
(9) Outside Calipers	9 GT 38598	4-in.	4 oz.	\$4.49
	9 GT 38599	6-in.	5 oz.	4.99
(10) Inside Calipers	9 GT 38593	4-in.	4 oz.	4.49
	9 GT 38597	6-in.	6 oz.	4.99
(11) Dividers	9 GT 38591	4-in.	4 oz.	4.49
	9 GT 38592	6-in.	6 oz.	4.99

(12) Hermaphrodite Caliper

CONSTRUCTION: High quality tool steel. Legs machined to uniform length and balance. Adjustable tension. 6 inches long.

ORDERING INFORMATION:

9 GT 38537—Shipping weight 5 ounces \$6.49

(13) Dial Caliper. Use to measure thickness of sheet goods.

CONSTRUCTION: Steel. 1/2-in. capacity. Readings in .0005-in. Zero adjustment. 1.9-in. diameter dial. From Japan.

ORDERING INFORMATION:

9 GT 40831—Shipping weight 6 ounces .. \$25.99

(14) Adjustable Trammel.

CONSTRUCTION: Steel. 3-inch points.

ORDERING INFORMATION:

9 GT 4061—Shipping weight 9 ounces \$12.99

(15) Double Point Scriber.

CONSTRUCTION: Steel. Knurled sleeve. 1 straight, 2 bent tempered points are replaceable and interchangeable. Measures 9-in. long with short point, 12-in. long with long point.

ORDERING INFORMATION:

9 GT 4014—Shipping weight 4 ounces \$1.99

(16) Single Point Scriber.

CONSTRUCTION: Reversible tungsten carbide steel tip, aluminum body. Magnetic end.

ORDERING INFORMATION:

9 GT 4078—Shipping weight 3 ounces \$2.39

(17) Center Punch.

CONSTRUCTION: Alloy steel point. Heat-treated knurled-steel body. 5-inches long. 1/2-inch diameter.


ORDERING INFORMATION:

9 GT 40541—Shipping weight 5 ounces \$5.99

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Vernier, Slide and Dial Calipers with standard or metric scales

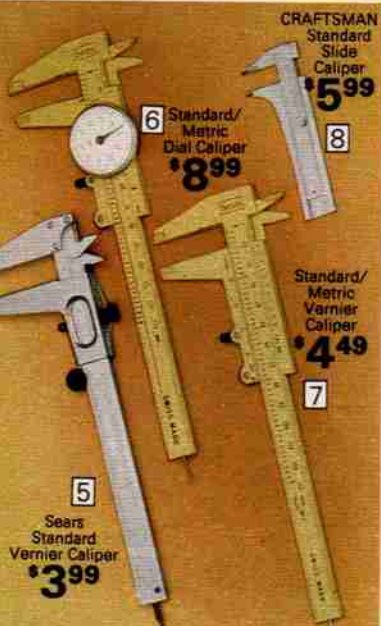

(5) Sears Standard and Standard/Metric Vernier Calipers

CONST: Polished steel. Roller adjustment. Reads inside, outside. Depth rod. 7 3/4-in. long. Accurate to .01 in.

CAPACITIES, ORDERING INFORMATION:

Standard Scale. 0 to 5-in. in 16ths, 32nds in. Vernier readings in 1/128ths in.

9 GT 4022—Shipping weight 7 ounces \$3.99

Standard/Metric Scale. 0 to 5-in. in 16ths in. 0 to 140 mm in 1 mm. Vernier readings in 1/128ths in., .1 mm.

9 GT 4022—Shipping weight 6 ounces \$3.99

(6 and 7) Standard/Metric Vernier and Dial Calipers

CONSTRUCTION: Nylon asbestos-reinforced polyamide plastic. Scales read inside or outside. Depth rod. Thumb roller. 8 3/4-in. long. Made in Switzerland.

(6) Dial Caliper. With zero adjustment, storage case.

CAPACITIES: Standard/Metric scales from 0 to 5-in. in .001-in. and 0 to 130-mm in .1 mm. Accurate to .001 in.

ORDERING INFORMATION:

9 GT 40224—Shipping weight 8 ounces \$8.99

(7) Vernier Caliper.

CAPACITIES: Standard/Metric scales from 0 to 5-in. in .001 in. and 0 to 130-mm in .05 mm.

ORDERING INFORMATION:

9 GT 40226—Shipping weight 6 ounces \$4.49

(8) CRAFTSMAN Standard Slide Caliper

CONSTRUCTION: Polished steel. Spring stop. 3-in. long. CAPACITIES: Inside reads to 2 3/4-in., outside to 2 1/4-in. in 32nds, 64ths or an inch.

ORDERING INFO: See warranty on page 75.

9 GT 4028—Shipping weight 3 ounces \$5.99



CRAFTSMAN® Machinists' Combination Square With protractor and center head **\$39.99**

Check 90 and 45° angles. Use as depth or height gauge.

CAPACITY: 12-in. scale graduated in 8ths, 16ths in. on one side; 32nds, 64ths on other. Non-reversible bevel protractor graduated 180° left and right. Level vial in square head. Meets Fed. Specs. GGG-S-656a for accuracy.

CONSTRUCTION: Hardened ground steel scale, machine divided for accuracy. Cast-iron, precision ground protractor, square head and center head.

ORDERING INFORMATION:

9 GT 38694—Shipping weight 1 pound 8 ounces \$39.99

Graduated in 32nds, 64ths inch and 1mm, 1/2mm.

9 GT 38643—Shipping weight 2 pounds 8 ounces \$39.99

Graduated in 32nds, 64ths and 50ths, 100ths inch.

9 GT 38695—Shipping weight 1 pound 8 ounces 39.99

As (9 GT 38694) but no protractor

9 GT 38693—Shipping weight 1 pound 8 ounces 24.99

As (9 GT 38694) but no protractor or center head.

With 6-inch scale.

9 GT 3869—Shipping weight 13 ounces 15.99

With 12-inch scale.

9 GT 38691—Shipping weight 1 pound 6 ounces 18.99



CRAFTSMAN® Indicator Holders, Center Finder Set, Edge Finder

(1) 50-lb. pull Magnetic Base Indicator Holder. Holds most dial indicators with 1/4-inch holder bar.

CONSTRUCTION: Steel. 50-lb. pull magnets. . . quick release lever control. 3 1/2 x 1 1/4 x 2 1/2-in. high, 6-in. high overall.

ORDERING INFORMATION: See warranty above right.
9 GT 3872—Shpg. wt. 15 oz. \$9.99

(2) On/Off 100-lb. pull Magnetic Base Indicator Holder. Holds most dial indicators; center-lug, universal-type or plunger back.

CONSTRUCTION: Steel. 100-pound pull magnets with on/off switch. Fine adjustment allows settings to within .0001-inches. 1 7/8 x 1 1/4 x 2 1/4-inches high, 9-inches high overall. From Japan.

ORDERING INFORMATION: See warranty above right.
9 GT 38908—Wt. 4 lbs. 7 oz. \$24.99

(3) 60-lb. pull Magnetic Base Indicator Holder. Holds most dial indicators.

CONSTRUCTION: Steel. 60-lb. pull magnets. . . quick release lever control. Adjustable ball and socket action. Fine adjustment screw for close tolerance settings. 3 1/2 x 2 x 2 1/2-in. high, 12-in. high overall.

ORDER INFO: See warranty above right.
9 GT 38911—Shpg. wt. 1 lb. 8 oz. \$14.99

(4) 4-piece Center Finder Set.

CONSTRUCTION: Tool steel. Interchangeable needle, ball, disc and offset points clamp into shank by ball and swivel joint action. . . . adjusts to angular or concentric position. Adjustable chuck tension. 4 1/2-in. long. With storage case.

ORDER INFO: See warranty above right.
9 GT 4004—Shipping wt. 5 oz. Set \$7.99

(5) 1/2-in. Single Edge Finder. Hardened steel surfaces. . . . centerless ground.

ORDER INFO: See warranty above right.
9 GT 38819—Shipping wt. 4 oz. \$3.99



(6) CRAFTSMAN Inspection Mirror. 2 1/4 x 3 1/2-inches. Steel handle telescopes from 11 1/4 to 15 1/4-inches.

ORDERING INFO:
Shipping weight 8 oz.
9 GT 4098 \$2.90

(7) Pocket Magnifier. Double lens. . . 1 and 1 1/2-in. diameter, 4 and 4 power. Plastic case.

ORDERING INFO:
9 GT 40813—Wt. 3 oz. \$4.49

(8) Eye Loupe. 1 1/2-in., 4 power. Plastic frame.

ORDERING INFO:
9 GT 40879—Wt. 3 oz. \$2.29

(9) CRAFTSMAN Desk Magnifier. Steel base. 2-in. diam., 1.7 power lens.

ORDERING INFO:
9GT40871—Wt. 14 oz. \$7.99

(10) Battery Powered 3 1/2-in. diam. Magnifying Glass. Pre-focused bulb throws light directly below 2 power lens. Unbreakable plastic handle and frame. 3 3/4 in. wide, 9 1/4 in. long. 4 AA penlite batteries and one bulb incl. Slide type on/off switch.

ORDERING INFO:
Shipping wt. 11 oz.
9 GT 40823 \$11.75

(11) Battery Powered 1x1-in. Magnifying Glass. Pre-focused bulb throws light directly below 4 power lens. Unbreakable plastic handle and frame. 4 1/2-in. long. 2 AAA batteries and one bulb incl. Press type on/off switch on handle.

ORDERING INFORMATION:
Shipping weight 5 oz.
9 GT 40821 \$3.75

Replacement batteries and bulb for (11). Includes 2 AAA alkaline batteries, 1 pre-focused bulb.

ORDERING INFORMATION:
Shipping weight 3 oz.
9 GT 40822 \$1.19



(15) Chrome-plated Stainless Steel Rules.

SIZES, ORDERING INFORMATION: See warranty above.

Catalog Number	Size inches	Graduations		Type	Wt. oz.	Each
		Front	Back			
9GT40886	6x1 1/2	1/16, 1/32 in.	1/32, 1/64 in.	Flex.	3	\$2.30
9GT40136	6x3/4	1/16, 1/32 in.	1/32, 1/64 in.	Rigid	3	2.99
9GT40891	12x1 1/4	1/32, 1/64 in.	1, 1/2 mm	Rigid	5	6.89

(16) Stainless Steel Rules.

ORDERING INFORMATION: Not Craftsman. Shipping weight 3 ounces.

Catalog Number	Size inches	Graduations		Type	Each
		Front	Back		
9 GT 4030	6x1 1/2	1/16, 1/32 in.	Dec. equiv.	Flex.	89c
9 GT 4006	6x3/4	1/32, 1/64 in.	Dec. equiv.	Flex.	99c
9 GT 4035	6x1 1/2	1, 1/2 mm		Flex.	69c

(17) Depth Gauge. Hardened steel. Head graduated right and left to 30°, 45° and 60°. 2 1/4-in. head. 6x7/32-in. rule, marked in 32nds, 64ths in. Tensioned slide locks at any depth.

ORDERING INFORMATION: See warranty above.
9 GT 40442—Shipping weight 4 ounces \$5.89

(18) 25-pc. Radius or Fillet Gauge Set. Stainless steel. Corresponding external, internal forms. Incl: 16 ga. (1/32 to 1 1/4 by 64ths), 8 ga. (1/32 to 1/2 by 32nds) 4-in. ga. holder, case. Meet Fed. Specs. GGG-G-17a, Type VII for accuracy.

ORDERING INFORMATION: See warranty above.
9 GT 40952—Shipping weight 1 pound Set \$24.99

(19 and 20) Tweezers. Nickel-plated steel.

(19) 6-in. straight end.
9 GT 4459—Shipping weight 4 ounces \$1.49

(20) 6 1/2-in. bent-end.
9 GT 4460—Shipping weight 4 ounces 1.49

CRAFTSMAN® Rules, Protractors, Gauges

FULL ONE YEAR WARRANTY

If, within one year from the date of purchase, any of these Craftsman Precision Measuring Instruments fails due to a defect in material or workmanship. We will repair it free of charge. This warranty service is available simply by returning the Precision Measuring Instrument to any Sears store or Service Center throughout the United States.

CRAFTSMAN® Dial Indicators

Quick reading of precise measurements when checking size variations on machined or production parts in the shop, garage or factory

(12) Dial Indicator Set

CAPACITY: Dial reads 0 to 50 to 0 in .001 inch graduations. . . . marked "+" and "-" for reading deviations. Range .200 inch (two revolutions). Dial 1 1/2-in. wide with back-plunger type gauge.

ACCESSORIES: Universal clamp, tool post holder, "G" clamp, hole lever attachment, 3 contact points and storage case.

ORDERING INFORMATION: See warranty above.

Shipping wt. 1 lb. 13 oz.
9 GT 3866 Set \$36.99

Dial Indicator alone. As in set above but no accessories.
9 GT 3867—Wt. 10 oz. \$19.99

(13) Dial Indicator

CAPACITY: Dial reads 0 to 100 in .001-inch graduations. Range 1-inch. Hard brass bearings. Detachable steel point. Adjustable bezel. Dial diameter 2 1/4 inches. From England. Meets Fed. Spec. Mil-1-18422D for accuracy.

ORDERING INFORMATION: See warranty above.
9 GT 38683—Wt. 11 oz. \$24.99


(14) Universal Test Indicator Set

CAPACITY: Dial reads 0-10-0-inches in .0005 inch graduations. Range .02 in. From England. Meets Federal Specs. Mil-1-18422D for accuracy.

ACCESSORIES: 3 contact points, 2 stems (3/8 and 1/4-inches), wrench, universal holder bar, 1/4 x 1/2 inches, clamp and dovetail slots. Automatic reversal contact point.

ORDERING INFORMATION: See warranty above.

Shipping wt. 1 lb. 2 oz.
9 GT 40755 Set \$39.99

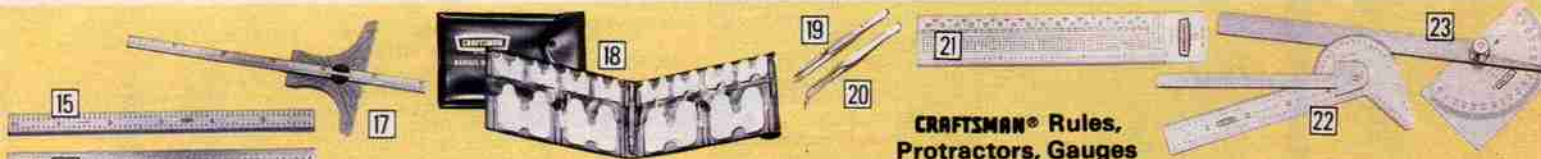

(21) Reference Table Rule. Stainless steel. 6-in. long. Graduated in 32nds, 64ths of an inch. With decimal equivalents, tap and drill data.

ORDERING INFORMATION: See warranty above.
9 GT 4011—Shipping weight 4 ounces \$1.69

(22) Combination Rule. Stainless steel. Graduated in 32nds, 64ths of an inch. Plastic storage case.

ORDERING INFORMATION: See warranty above.
9 GT 4026—Shipping weight 4 ounces \$2.99

(23) Protractor. Stainless steel. Rectangular head. Scale double graduated 0 to 180°. Adjustable spring tension holds setting. Sets at true zero.

ORDERING INFORMATION: See warranty above.
9 GT 4029—Shipping weight 5 ounces \$4.49

Sears Electrical Testers and Analyzers

You don't have to guess about correct wiring . . . our test equipment will help you spot dozens of the most common wiring errors and problems and tell you when they have been corrected



Let you make test readings without shutting down the equipment when it is being tested. Will also take readings from insulated wire. Snap transformer jaws around one conductor and quickly read out accurate measurements.

(1) Volt-Ohm-Ammeter

With easy-to-read digital scale . . . captures and holds motor starting current peak.

\$159⁹⁵

TESTS: Reads low resistance accurately. Captures and holds peak motor starting surge current. Digital read out from .1 to 999 volts, amperes or ohms. Use to identify line, neutral, ground at AC receptacle terminals. Check fuses, proper grounding of electrical systems, electrical systems with unloaded or incremental start capabilities, phase imbalance.

CASE: Plastic. Includes PVC test leads, carry pouch with strap.

SIZE: 7x4x9 inches high.

Test leads 5 ft. long.

ORDERING INFO: Wt. 3 lbs.

34 GT 5198 \$159.95



(2) Volt-Ammeter

Swivels so scale faces you for easier reading

\$47⁹⁵

TESTS: Take readings from insulated wire. Meter adjusts to read from 30 to 150 amperes; from 150 to 600 volts. Scales are color-coded; red for volts, black for amperes.

CASE: Jaws and upper section of plastic meter swivel through 5 separate positions . . . a full 180°. Allows the meter scale to remain facing you even when taking readings from awkwardly placed conductor wires. Includes PVC test leads, carrying pouch with belt loop.

SIZE: Measures 2 1/4 x 6 inches high. Test leads 30 inches long.

ORDERING INFORMATION:

Shpg. wt. 1 lb. 4 oz.

34 GT 5195 \$47.95



(3) Line Cord Energizer

Multiplies the sensitivity of Volt-Ammeter at left

\$8⁹⁵

Multiplies the sensitivity of Volt-Ammeter (34 GT 5195) by 10 times for accurate readings on fractional horse power motors, small appliances and low current equipment. With receptacles to read amps direct and to take voltage readings.

TESTS: Splits double conductor linecord for direct readings, under load conditions, without actually cutting the conductor. Allows voltage readings at the outlet with the appliance or equipment in actual use, without disconnecting it from the line.

CASE: Plastic, plug in.

SIZE: 2 1/4 x 4 1/2 in. high.

ORDERING INFO:

Shpg. wt. 6 oz.

34 GT 5197 \$8.95



(4 and 5) Volt-Ohm-Milliammeters

Read in AC or DC, make accurate tests of important electrical functions . . . perfect for radio, TV or electronic hobbyist

23 useful **\$124⁹⁵** ranges

16 useful **\$27⁹⁵** ranges

(4) Transistorized Field Effect multimeter ideal for use in transistorized semiconductor or very high resistance circuits. Has exceptionally high input impedance. With center scale zero capability; three color scale.

TESTS: Measures AC volts from 12 to 1200; DC volts from .3 to 1200; DC milliamperes from .06 to 600; ohms from 1 to 1000 megohms; decibels from -20 to +57. DC input resistance of 12 megohms. Accuracy of 3% full scale DC; 4% full scale AC.

CASE: Plastic. With batteries, vinyl test leads and pouch.

SIZE: 5 1/4 x 2 3/4 x 8 7/8 in. high. 47 inch test leads.

ORDERING INFORMATION:

Shpg. wt. 5 lbs.

34 GT 5196 \$124.95

(5) Whether you're an electrical hobbyist or professional electrician, you'll appreciate the accuracy and versatility of this sophisticated tester.

TESTS: Five basic electrical functions. Measures AC volts from 10 to 1000; DC volts from 2.5 to 1000; DC milliamperes from .05 to 250; ohms from 4 to 40,000; decibels from -20 to +62. Measurements displayed on conventional flat scale with accuracy of 3% full scale DC; 4% full scale AC.

CASE: Plastic. With battery, vinyl test leads, pouch.

SIZE: 3 1/4 x 1 1/4 x 4 3/4 in. high. 40 inch test leads.

ORDERING INFO:

Shpg. wt. 1 lb.

34 GT 5194 \$27.95



Voltage Testers . . . identify AC-DC, blown fuses, leakages

(6) Voltage Tester . . . provides check for 7 common problems **\$13⁹⁵**

Uses one solenoid indicator with calibrated scale plus a neon test lamp. Independent circuitry for each provides built-in back-up safety system.

TESTS: Checks for 110-550 volt AC and 110-600 volt DC at 25 to 60 Hz. frequency. Identifies AC or DC; checks circuit continuity; determines DC polarity; finds blown fuses, grounding and leakage.

CASE: ABS plastic case. 30-inch vinyl test leads help you reach into tight places for testing.

SIZE: 5 3/4 inches long, 5 1/4 inch test prods.

ORDERING INFORMATION:

34 GT 5193—Shipping weight 14 ounces \$13.95

(7) Voltage Tester . . . provides check for 4 common problems **\$9⁹⁵**

Set test select switch to desired setting. Touch each probe end to terminals, test lamp lights up to determine result of test. Solid state circuits.

TESTS: Checks for voltage, 4 to 600 volts AC or DC; determines DC polarity; checks circuit continuity; finds ground fault leakages.

CASE: Plastic, vinyl test lead. With battery and pouch.

SIZE: 9x3x17 inches long, 50 inch test lead.

ORDERING INFORMATION:

34 GT 5199—Shipping weight 8 ounces \$9.95

(8) Plug in Analyzer for grounded outlets **\$3⁹⁵**

So simple to use . . . just plug into any three-wire electrical outlet . . . or use adapter (not included) to plug into 2-wire electrical outlet. One or more lights will come on to quickly identify trouble. Match this pattern of lit and unlit lights with coded key on tester to identify circuit condition.

TESTS: Determines 5 errors . . . open ground; open hot; open neutral; hot and ground reversed; hot and neutral reversed. Also indicates correct wiring. Key appears on both sides of analyzer, so no need to unplug to read.

CASE: Plastic.

SIZE: 1 1/2 x 2 1/2 in. long.


ORDERING INFO:

Shpg. wt. 2 oz.

34 GT 6088 \$3.95



Electrical Outlet Power Strips

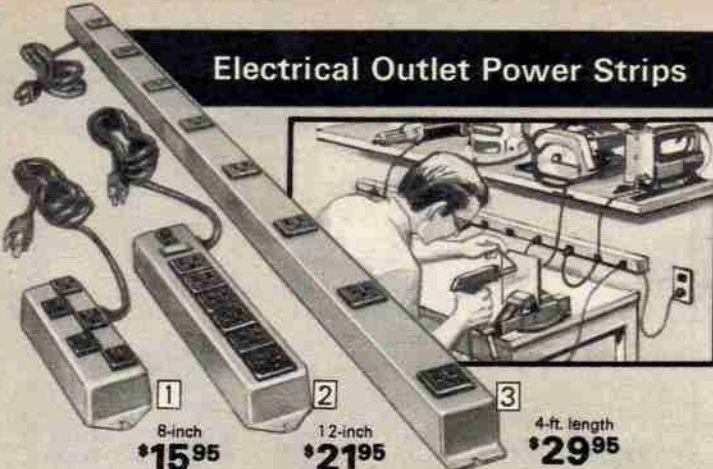

Simply mount and plug in these Strips for almost instant wiring wherever extra outlets are needed

Just plug an electrical power strip into any other 110-120-volt outlet, then plug tools and appliances into strip. Great for workshop or kitchen where extra outlets are needed without the need for additional wiring.

INSTALLATION: Mount onto wall. Strip is completely wired and assembled. ELECTRICAL INFO: UL listed, 110-120-v. AC. Rated capacity 15 amps.

(1) 5 outlets

CONSTRUCTION: With 5 grounded outlets. Blue enameled steel. Snap-in components, circuit breaker. Heavy-duty 14-gauge 3-wire cord may be disconnected as a safety measure. 5 $\frac{1}{16}$ -inch mounting centers. Cord measures 6 feet. **SIZE:** Measures 8 inches long.

ORDERING INFO: Shpg. wt. 1 lb. 11 oz. 34 GT 5010\$15.95

(2) 6 outlets

CONSTRUCTION: With 6 grounded outlets. Blue enameled steel. Snap-in components, circuit breaker, pilot light. Convenient on/off switch. Heavy-duty 14-gauge 3-wire cord. 10 $\frac{1}{16}$ -in. mounting centers. Cord measures 6 ft. **SIZE:** Measures 12 inches long.

ORDERING INFO: Shpg. wt. 2 lbs. 4 oz. 34 GT 5011\$21.95

(3) 8 or 10 outlets

CONSTRUCTION: Blue enameled steel. Snap-in components and circuit breaker. 14-ga. 6 ft. 3-wire cord.

OUTLETS, SIZES, ORDERING INFO: 8 outlets, 46 $\frac{1}{4}$ -in. center. 4 ft. long. Shpg. wt. 6 lbs. 34 GT 5012C\$29.95 10 outlets, 70 $\frac{1}{4}$ -in. center. 6 feet long (Not shown.) Wt. 7 lbs. 34 GT 5013C\$34.95

Electrical Power Outlet Strips ready to wire into outlet box

Power outlet strips are completely assembled and ready to be wired in.

CONSTRUCTION: All outlets are grounded. Blue enameled steel. Snap-in components. $\frac{1}{2}$ -inch knockouts at both ends. Wired with 14-ga. wire.

INSTALLATION: Mount and wire into outlet box. Snap on top cover. **ELECTRICAL INFO:** UL listed, 110-120-volt, AC. Rated 15-amp capacity.

Outlets	Length	Centers	Catalog Number	Shipping weight	Each
5	3 ft.	7 in.	34 GT 5014C	4 lbs.	\$13.95
7	4 ft.	7 in.	34 GT 5015C	5 lbs.	16.95
8	5 ft.	7 in.	34 GT 5016C	5 lbs.	18.95
10	6 ft.	7 in.	34 GT 5017C	7 lbs.	22.95

Ground-fault Circuit Interrupters

Help protect you against small current leakages in tools or appliances indoors or out

(4 and 5) Small leakages may not trip a 15 or 20-amp fuse or circuit breaker and might provide dangerous shocks. Designed to cut off ground-fault currents as low as 5/1000 of an ampere (5 milliamperes). Trouble is sensed and in as little as 1/40 second the current is cut off. National Electrical Code recommends this type protection on outdoor circuits. **ELECTRICAL INFORMATION:** UL listed, 110-120-volt, AC. 15-amp capacity.

(4) Portable Plug-in Type

Use anywhere indoors or out where there is a danger of leakages. Can be used in any outlet, 2 or 3-wire, because grounded prong can be retracted.

CONSTRUCTION: Beige case of glass reinforced polyester. Red light to indicate circuit disconnect. With two side-by-side grounding receptacles.

ORDERING INFORMATION:

34 GT 5316—Shipping weight 1 pound.....\$49.50

(5) Indoor Wall-outlet Type

Designed to provide ground-fault protection at any outlet or a group of 15-amp outlets.

CONSTRUCTION: Metal. Solid state circuitry, built-in test circuit for testing and resetting.

INSTALLATION: Replaces wall receptacle. Fits into conventional outlet boxes with minimum depth of 2 $\frac{1}{2}$ inches. If outlet box has less depth, use adapter frame (included) to provide proper clearance.

ORDERING INFORMATION:

34 GT 5328—Shipping weight 1 pound.....\$34.95



\$49.50



\$34.95

CRAFTSMAN® Cordless Soldering Iron Kit



Complete Kit

\$19.99

CONSTRUCTION: 2 rechargeable batteries. Plastic housing. Push-button heat control... heats over 700°. 8 inches long.

ACCESSORIES: Regular tip, wall-mount bracket, charger, instructions.

ELECTRICAL INFO: 115-v., 60-Hz. AC. UL listed.

ORDERING INFO: Shpg. wt. 1 lb. 4 oz. 9 GT 53802Kit \$19.99

Replacement Tips.

ORDER INFO: Wt. 3 oz.

Regular.

9 GT 53805Each \$2.79

Fine.

9 GT 53806Each \$2.79

CRAFTSMAN® Dual-heat Soldering Guns



Heavy-duty Kit with 150-230-w. Soldering Gun

\$19.99

Medium-duty 100-140-watt Soldering Gun

\$11.99

150-230-watt Soldering Gun Kit

CONSTRUCTION: Polymer housing. Trigger control. Heats over 1100°. 11 in. long.

ACCESSORIES: Tips (2 gen.-duty, 1 plastic, 1 heat seal), solder, case.

ELECT. INFO: UL listed. 110-120-v., 60-Hz. AC. 6-ft. cord. Wt. 5 lbs. 1 oz.

ORDERING INFO: 9 GT 52855Kit \$19.99

Replacement Tips for dual-heat guns above

ORDERING INFO: Package of 2. Shpg. wt. 3 oz.

9 GT 52836—General-duty TipsPackage \$1.59

9 GT 52837—Heat Sealing TipsPackage 1.59

9 GT 52838—Plastic Cutting TipsPackage 1.59

9 GT 52834—Electrical-work TipsPackage 1.59

150-230-w. Soldering Gun alone. Low heat for general work, high for hvy.-duty jobs.

ORDERING INFO: Shpg. wt. 3 lbs. 10 oz. 9 GT 52851\$16.99

100-140-w. Gun Low heat for small jobs, high for general work.

ORDERING INFO: Shpg. wt. 3 lbs. 2 oz. 9 GT 52841\$11.99

CRAFTSMAN® Pencil-type Soldering Irons



CRAFTSMAN® 200-watt Soldering Iron \$13.99

CRAFTSMAN® 42-watt Soldering Iron Kit

CONSTRUCTION: Polymer handle. Heats over 700° depending on tip used. 8 in. long.

ACCESSORIES: Iron stand, wire stripper, 3 tips ($\frac{1}{8}$ -in. pencil and chisel, $\frac{1}{16}$ -in. pyramid).

ELECTRICAL INFO: UL listed. 110-120-v., 60-Hz. AC. $\frac{1}{2}$ -foot cord.

ORDERING INFORMATION:

9 GT 53513—Shipping weight 8 ounces ... Kit \$7.99

CRAFTSMAN® 27-w. Soldering Iron Kit

As above, but kit incl. $\frac{1}{8}$ -in. chisel, $\frac{1}{16}$ -in. chisel tip, stand, solder.

ORDERING INFORMATION:

9 GT 54513—Shipping weight 8 ounces ... Kit \$5.99

Replacement Element. For 42-w. iron above.

9 GT 53515—Shipping weight 4 ounces\$3.79

Replacement Pyramid Tips. For irons above.

9 GT 53516—Pkg. of 2. Shpg. wt. 3 oz. ... Pkg. \$1.39

CONSTRUCTION: Hardwood handle. Industrial-type for continuous use. Precision-mounted element and $\frac{3}{4}$ -inch tapered chisel-style, plated-copper tip that heats to 900°. Measures 15 inches long.

ELECTRICAL INFORMATION: UL listed. 110-120-volt, 60-Hz. AC. 5-foot cord.

ORDERING INFORMATION: Shipping wt. 2 lbs. 1 oz. 9 GT 53832\$13.99

Replacement Tip.

For 200-watt soldering iron above and former soldering iron 9-53831.

ORDERING INFORMATION: Shipping weight 12 ounces. 9 GT 53835\$2.99

(6 thru 8) Solder for electrical or non-electrical work



(6) Silver Solder and Flux

For soldering alloy steel. Includes approximately 60 inches of solder and .35-ounce tube of flux.

ORDERING INFORMATION: Shipping weight 4 ounces.

9 GT 80993\$2.49

(7) Stainless Steel Solder and Flux

For non-electrical soldering of stainless steel, chrome, nickel alloys. Lead-free. Includes approximately 100 inches of solder and .35-ounce tube of flux.

ORDERING INFORMATION: Shipping weight 5 ounces. 9 GT 80992\$2.59

(8) Wire Solder.

Soldering compounds are made up of tin and lead. Generally, larger amounts of tin in a solder make for a stronger bond.

Acid and rosin-core solders have flux in core so they do not require paste.

ORDERING INFORMATION:

Catalog Number	Quantity	Diam. (in.)	Tin/lead Ratio	Wt. lbs. oz.	Each
----------------	----------	-------------	----------------	--------------	------

Solid Wire Solder plus Flux. For non-electrical work.

9 GT 80531	1-lb. spool	$\frac{1}{16}$	30/70	1 4	\$4.99
9 GT 80541	1-lb. spool	$\frac{1}{8}$	50/50	1 4	5.49
9 GT 80756	5-lb. spool	$\frac{1}{8}$	40/60	5 2	21.00

Acid Core Solder. For non-electrical work.


9 GT 80562	5-ft. coil	$\frac{1}{16}$	40/60	...	3 59c
9 GT 8079	10-ft. coil	$\frac{1}{16}$	40/60	...	5 1.39
9 GT 8051	1-lb. spool	$\frac{1}{8}$	40/60	1 3	4.79
9 GT 80755	5-lb. spool	$\frac{1}{8}$	40/60	5 2	21.00

Rosin Core Solder. For electrical work.

9 GT 80552	5-ft. coil	$\frac{1}{16}$	30/70	...	3 59c
9 GT 8078	10-ft. coil	$\frac{1}{16}$	40/60	...	5 1.39
9 GT 8052	1-lb. spool	$\frac{1}{8}$	40/60	1 3	4.79
9 GT 8089	10-ft. coil	$\frac{1}{16}$	60/40	...	3 1.39
9 GT 8057	1-lb. spool	$\frac{1}{8}$	60/40	1 2	6.59
9 GT 80753	5-lb. spool	$\frac{1}{8}$	60/40	5 2	30.00

Specialty Worklights

Put the light where you most need it

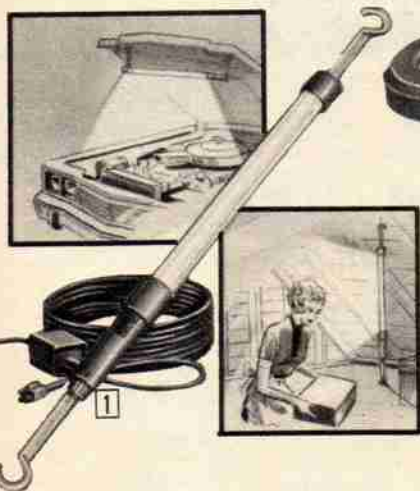

(1) Fluorescent Worklight
\$36⁹⁵

The compact, heavy-duty fluorescent worklight is perfect for jobs requiring maximum light and minimum heat.

CONSTRUCTION: 15-w. fluorescent bulb offers three times as much light as an ordinary incandescent bulb of the same wattage. Shock-resistant, virtually unbreakable plastic shield protects fluorescent tube, guards against shattered glass. Handle, end caps made of oil-resistant orange rubber. Orange cord with molded plug cap. On-off switch in handle. 2 hinged hooks on hand lamp for mounting in any position.

ELECTRICAL INFORMATION: 15 watts. 15-foot cord. UL listed for 110-120 volts 60 Hz. AC.

ORDERING INFORMATION:

Shipping weight 6 pounds.
34 GT 5923C \$36.95



(2) Adjustable-arm Fluorescent Lamp with 3-power magnifying lens
\$59⁹⁵

Ideal for jobs requiring close visual scrutiny

CONSTRUCTION: Viewing area of 4 1/4 inches with 3-power magnification... ideal for component assembly, close detail work or hobbies like stamp collecting. Three-diopter, 13-inch focal length lens is precision-ground and polished for clear viewing with low distortion. 22-watt circline bulb (included) spreads bright light, yet stays cool so you can get close to your work. Measures 45 inches long. Double-tension arm adjusts for accurate positioning. Attaches to table or bench up to 2 1/4 in. thick with sturdy "C" clamp. Gray baked enamel finish metal.

ELECTRICAL INFORMATION: 22 watts. 7-foot cord. UL listed for 110-120 volts 60 Hz. AC.

ORDERING INFORMATION:

34 GT 5922—Shipping weight 8 lbs. \$59.95

(3 thru 6) Incandescent Lights

(3) Trouble Light with Reel

CONSTRUCTION: Enameled metal reel, plastic bulb guard and reflector. Self-locking thermoplastic covered cord. On-off switch.

ELECTRICAL INFORMATION: UL listed 110-120-v. 60 Hz. AC. 20-ft. cord, 2-wire, 6 amp rated. 35-ft. cord, 3-wire, 7 amp rated. Use up to 75-w. bulb, not incl.

ORDERING INFORMATION:

34 GT 5889—20-ft. cord. Wt. 5 lbs. 2 oz. \$10.50
34 GT 5894—35-ft. cord. Wt. 11 lbs. 20.95

(4) Trouble Light with grounded outlet

CONSTRUCTION: Plastic handle, bulb guard and reflector. Orange vinyl-covered cord is heavy-duty, 3-wire, 16 gauge. On-off switch.

ELECTRICAL INFORMATION: UL listed 110-120-volts 60 Hz. AC. 15-foot cord. Use up to 75-watt bulb, not included.

ORDERING INFORMATION:

34 GT 5918—Shpg. wt. 1 lb. \$5.99

(5) Standard Trouble Light

CONSTRUCTION: Plastic handle, bulb guard and reflector. Black vinyl-covered cord is 2-wire. On-off switch in handle.

ELECTRICAL INFORMATION: UL listed 110-120-v. 60 Hz. AC. Available with 15-ft. or 25-ft. cord. Use up to 75-w. bulb, not included.

ORDERING INFORMATION:

34 GT 5916—15-ft. cord. Wt. 1 lb. 12 oz. \$3.29
34 GT 5917—25-ft. cord. Wt. 2 lbs. 4.49

(6) Clamp-on Utility Light

CONSTRUCTION: Aluminum reflector with 10 inch diameter. Spring clamp with rubber-covered grips and ball-bearing swivel. Push-thru socket.

ELECTRICAL INFORMATION: Use up to 150-w. bulb, not included. 6-ft. cord with molded-on cap. UL listed 110-120-volts 60 Hz. AC.

ORDERING INFORMATION:

34 GT 5876—Shipping weight 1 lb. 7 oz. \$3.69



(7) Portable Reel with Cord Guide
\$19⁹⁵

Just turn handle and guide winds cord neatly onto reel without unplugging. To unwind, simply pull on cord. Ready for use most anywhere you need it—with your lawn mower, hedge shears, snow blower or power tools.

CONSTRUCTION: Sturdy reel of heavy-gauge steel and tough cast aluminum alloy with baked-on orange enamel finish. Holds up to 100 feet of 14/3 "ST" electrical cord (not included). Chrome-plated tubular steel stand resists rust. Two brackets and spacers included for mounting on almost any wall, siding of house, trailer, or near any convenient power source. Stands 27 1/2 inches high.

ORDERING INFORMATION:

34 GT 5864—Wt. 13 lbs. \$19.95

(8) Portable Reel

Wind, store or unwind cord with no tangles, twists or knots. Use freestanding in yard, or wall-mount it outside or in garage with brackets included. Simply unwind as much electrical cord as is needed, plug into nearest outlet. When finished, just unplug cord and turn handle to re-wind. Useful for electric lawn mowing, outdoor barbecuing, farming or industrial work.


CONSTRUCTION: Sturdy steel reel holds up to 100 feet of 14/3 "ST" electrical cord (not included). Wide-stance steel stand helps prevent tipping. Large wooden handle for fast, easy wind-up.

ORDERING INFORMATION:

Shipping weight 7 pounds.
34 GT 5865 \$8.95



(9) 3-wire Grounded Extension Cords



14-gauge is extra heavy duty for larger power tools and motors. It has 50% thicker insulation around conductors and 150% thicker jacket than 16-gauge. 16-gauge is heavy duty and ideal for indoor and outdoor use of small power tools, mowers, lawn tools.

CONSTRUCTION: Thermoplastic jacket is insulated, water-repellent and bright orange in color.

ELECTRICAL INFORMATION: UL listed for 110-120 volts 60 Hz. AC. GAUGE, LENGTH, CAPACITIES. ORDERING INFORMATION:

14-Gauge 3-wire Cords					16-Gauge 3-wire Cords				
Lgth. feet	Amp. cap.	Catalog number	Wt. lbs. oz.	Price	Lgth. feet	Amp. cap.	Catalog number	Wt. lbs. oz.	Price
25	15	34 GT 5834	4 7	\$7.99	25	13	34 GT 7797	2 10	\$4.79
50	15	34 GT 5835	10 0	13.99	50	13	34 GT 7798	4 12	8.49
100	13	34 GT 5836C	16 0	23.95	100	10	34 GT 7799	7 4	14.79

(10) 8-foot and 15-foot Tool and Appliance Cords

For use with all electrical appliances such as: washing machines, deep freezers, refrigerators, motors and power tools.

CONSTRUCTION: 16-gauge 3-wire "SJT" cord with molded-on vinyl male and female U-Ground plugs.

ELECTRICAL INFORMATION: Accommodates up to 1625 watts. 13 ampere capacity. Choose between 8-ft. and 15-ft. cord. UL listed for 110-120 volts AC.

LENGTH, ORDERING INFORMATION:

34 GT 5757—8-ft. cord. Shpg. wt. 10 oz. \$2.49
34 GT 5758—15-ft. cord. Shpg. wt. 1 lb. 3 oz. 3.59

Accessories for handling conduit



(1) Portable or Bench-mount Conduit Vise

For clean cut-offs of conduit, hose, dowling and more

Helps to cut conduit, metal hose; copper, plastic or thinwall tubing; moldings, rubber hose and dowling. Will handle from 1/2-inch to 2-inch outside diameter. Use with 24 or 32 tooth hacksaw blades.

CONSTRUCTION: Cast iron and steel. Mitre-box saw guide. Holes for bench mounting. Large, free-spinning thumb-nut clamp with extra-hard threads. Swing-away clamp to hold conduit. Contoured grip.

SIZE: 3x3 1/4 x 8 inches long.

ORDERING INFORMATION:

34 GT 5007—Shipping weight 2 pounds 4 ounces \$10.95

(2) Conduit Bender

Bends two sizes: 1/2-inch and 3/4-inch thin-wall.

CONSTRUCTION: Steel. Built-in degree scale makes it easy to bend conduit to desired curve. Extended foot increases leverage. Steel handle not included, order below.

ORDERING INFORMATION:

34 GT 5005—Shpg. wt. 5 lbs. .. \$11.95

38-inch steel handle

34 GT 5006C—Shpg. wt. 4 lbs. .. \$4.99

(3) Fish Tape Reel

For pulling wire through conduit.

CONSTRUCTION: Lightweight 8 1/2-inch diameter reel of high-impact plastic. Won't rust or dent. Large grips with grained surface for non-slip handling. Built-in winder rewinds tape smoothly. Includes 40 feet of tape.

ORDERING INFORMATION:

34 GT 5139—Shpg. wt. 1 lb. 8 oz. \$8.95

Reel with 100 feet of tape

34 GT 5140—Shpg. wt. 4 lbs. .. \$17.95



Electrician's Tools

(4) Automatic Wire Stripper

Strips and cuts almost 900 different types of wire and cable, up to AWG, solid or stranded. Built-in "Sensor" measures wire and adjusts for perfect stripping results without "nicking" wire. Front-feed makes stripping of short wires easy from any position. Requires minimum "squeezing" pressure. Easy-grip handle.

CONSTRUCTION: Swedish steel, fully insulated. Lightweight, 10 in. long.

ORDERING INFORMATION:

Shipping weight 6 ounces.

34 GT 6073 \$31.95

(5) Automatic Stripper

Just squeeze handles together to automatically strip wire from 8 to 22-gauge. Reduces damage to wire.

CONSTRUCTION: Steel. Plastic insulated handle grips. 7 in. long.

ORDERING INFORMATION:

Shipping weight 14 ounces.

34 GT 6072 \$8.99

(6) Electrical Repair Tool

Cuts and strips wire from 10 to 22 gauge. Crimps insulated terminals and connectors.

CONSTRUCTION: Steel. Insulated handle grips. Measures 7 1/2 in. long.

ORDERING INFORMATION:

Shipping weight 8 ounces.

34 GT 6096 \$4.49

(7) Electrician's Stripper

Cleanly strips solid wire from 10 to 18-gauge.

CONSTR.: Steel. Plastic insulated handle grips. Measures 6 in. long.

ORDERING INFORMATION:

Shipping weight 5 ounces.

34 GT 6071 \$3.99

Heavy-duty precision tool

\$31.95

4

\$8.99

5

\$4.49

6

7

\$3.99

Electrical Repair Kits .. with terminals and connectors to quickly handle most electrical chores



300-piece kit with Electrician's tool

\$34.95

(8) 300-piece Electrical Repair Kit

without tool

Do it yourself and get professional results.

CONSTRUCTION: Heavy-duty, all welded steel box with 16 compartments. 300 assorted, insulated terminals and conductors (see chart at right). Coded lid sheet. 9 1/2-in. compartment for tool.

ORDERING INFORMATION:

34 GT 6065—Wt. 3 lbs. 4 oz. \$29.95

(9) Kit with tool

Same as above but with all purpose crimper, stripper and wire cutter.

CONSTRUCTION: Steel. Insulated plastic handle grips. 7 1/2 in. long.

ORDERING INFORMATION:

34 GT 6066—Wt. 3 lbs. 8 oz. \$34.95

(10) 150-piece Mechanics Repair Kit

Mechanics Repair Kit. . . includes all purpose 7 1/2-in. steel tool. Plastic storage box, 150 terminals and connectors.

Terminal Description	Quantity	Wire Size	Stud Size
Closed-end Sleeve	7	18-10 Ga.	
Spade	15	18-14 Ga.	10
Spade	4	12-10 Ga.	10
Spade flag	15	18-14 Ga.	6
Spade-end Flange	15	22-16 Ga.	6
Ring	15	22-16 Ga.	10
Ring	15	18-14 Ga.	10
Ring	15	16-14 Ga.	6
Ring	4	12-10 Ga.	10
Faston Receptacle	12	18-14 Ga.	
Butt Connector	15	22-16 Ga.	
Butt Connector	12	18-14 Ga.	
Butt Connector	6	12-10 Ga.	

ORDERING INFORMATION:

34GT6080—Shpg. wt. 2 lbs. 2 oz. . \$18.95


(11) 24-piece Standard Repair Kit

Standard Repair Kit. . . includes all purpose 7 1/2-inch steel tool. Plastic case with 24 terminals and connectors. Case mounts to workbench.

Terminal Description	Quantity	Wire Size	Stud Size
Butt Connector	3	22-16 Ga.	
Butt Connector	3	18-14 Ga.	
Ring	1	22-16 Ga.	10
Ring	2	22-16 Ga.	5-6
Ring	2	18-14 Ga.	10
Ring	1	18-14 Ga.	6
Ring	2	12-10 Ga.	10
Spade	2	22-16 Ga.	10
Spade	2	18-14 Ga.	10
Spade	2	12-10 Ga.	10
CES	2	18-10 Ga.	
CES (yellow)	2	18-10 Ga.	

ORDERING INFORMATION:

34 GT 6084—Shpg. wt. 11 oz. \$8.49



CRAFTSMAN® Electric Chain Saws

Double insulated to eliminate any need for grounding



2-HP motor with self-sharpening Barracuda chain plus automatic and manual oilers
With 14-in. guide bar. **\$98⁹⁵**

BARRACUDA CHAIN: Industry's fastest-cutting chrome-plated chain with Power-Sharp® self-sharpening.

14-IN. GUIDE BAR: Sprocket-nose roller bearings ease chain around end of bar... cut friction, wear.

2-HP MOTOR: 100% ball bearings. Safety lock.

AUTOMATIC AND MANUAL CHAIN OILERS: Automatic for normal use; manual for heavy use.

HOUSING: Aluminum die-cast gear housing; blue and white polymer motor housing. Cast-in spike bar. Built-in chain tensioning device. Weighs 12 lbs.

ELECTRICAL INFO: Double insulated. UL listed. 110-120-v., 60-Hz AC. 1200 w. 14½-in., 2-wire cord.

ORDERING INFORMATION: Guide bar, chain sent unattached. Instructions and bar wrench included.

32 GT 3417—Shipping weight 14 lbs. 2 oz. \$98.95

32 GT 3610—Replacement 14-in. chain. Wt. 10 oz. ... 21.50

(1) **Black vinyl Case.** Fits electric saws 3407, 34071, 3408, 3414, 3415, 3416, 3417. Guard included.

32 GT 36614—Shipping weight 1 lb. 6 oz. \$9.49



2-HP Saw with 14-in. bar | 1½-HP Saw with 12-in. bar
\$73⁹⁵ | \$59⁹⁵

CHISEL CHAIN: Long-wearing, chrome-plated. **STEEL GUIDE BAR:** Hardened and polished steel. **MOTOR:** Safety lock switch. Sleeve bearings. **MANUAL CHAIN OILER:** Top-mount thumb control. **HOUSING:** Aluminum die-cast gear housing; heat-resistant polymer motor housing. Cast-in spike bar. Chain tensioning device.

ELECTRICAL INFORMATION: Double insulated. UL listed. 110-120-v., 60-Hz AC. 1½-HP saw: 1200 watts; 2-HP saw: 1320 watts, 14½-in., 2-wire cord.

ORDERING INFORMATION: Guide bar, chain sent unattached. Instructions and bar wrench included.

2-HP Chain Saw with 14-inch guide bar. Yellow and black housing. Weighs 10 lbs. 13 oz.

32 GT 3408—Shpg. wt. 13 lbs. 5 oz. \$73.95

Replacement 14-inch Chisel Chain. 32 GT 3613—Shpg. wt. 8 oz. 16.50

1½-HP Chain Saw with 12-inch guide bar. Black and red housing. Weighs 10 lbs. 3 oz.

32 GT 34071—Shpg. wt. 13 lbs. \$59.95

Replacement 12-inch Chisel Chain. 32 GT 3611—Shpg. wt. 6 oz. 12.50



These 4 saws all have Chisel chains with manual chain oilers

1-HP Saw with 10-in. bar | 1-HP Saw with 8-in. bar
\$40⁹⁵ | \$32⁹⁵

CHISEL CHAIN: Non-chrome-plated. **STEEL GUIDE BAR:** Unpolished laminated steel. **1-HP MOTOR:** Sleeve bearings.

MANUAL CHAIN OILER: For normal use. **HOUSING:** Aluminum die-cast gear housing; black and red heat-resistant polymer motor housing. Cast-in spike bar for quick-cutting leverage.

ELECTRICAL INFORMATION: Double insulated. UL listed. 110-120-v., 60-Hz AC. 960 watts. 10-inch, 2-wire cord included.

ORDERING INFORMATION: Guide bar, chain sent unattached. Instructions and bar wrench included.

1-HP Chain Saw with 10-inch guide bar. Thumb control of oiler. Weighs 9 lbs. 3 oz.

32 GT 3400—Shipping weight 11 lbs. 12 oz. ... \$40.95

Replacement 10-inch Chisel Chain. 32 GT 3622—Shpg. wt. 6 oz. 9.50

1-HP Chain Saw with 8-inch guide bar. Weighs only 9 pounds.

32 GT 3444—Shipping weight 11 lbs. \$32.95

Replacement 8-inch Chisel Chain. 32 GT 3614—Shipping weight 4 ounces 7.50

CRAFTSMAN® Super-lightweight Gas Chain Saws

... the lightest, most durable, easiest-to-handle gas chain saws we sell due to magnesium and aluminum castings; forged steel connecting rods; and roller and needle bearings for long life



2.1-cu. in. engine with self-sharpening Barracuda chain plus automatic and manual oilers
With 14-inch guide bar **\$197⁹⁵**

BARRACUDA CHAIN: Industry's fastest cutting chrome-plated chain... plus Power-Sharp® self-sharpening system—built-in stone sharpener hones chain as saw runs. Requires only a light touch of knob for 5 seconds.

14-INCH GUIDE BAR: Sprocket-nose roller bearings ease chain around end of bar—point of most friction and wear.

2.1-CUBIC INCH ENGINE: 2-cycle engine with spark and noise-arresting muffler. 11-ounce magnesium fuel tank. All-position carburetor with reliable power to cut and trim in almost any position... even upside down.

NEEDLE BEARINGS: chrome-plated cylinder walls.

AUTOMATIC AND MANUAL CHAIN OILERS: Automatic oiler for normal-use cutting; manual oiler for heavy-use cutting.

HOUSING: Lightweight red magnesium frame. Vinyl-covered front handles, die-cast rear handle with rubber hand grip. Weighs 10 lbs. 8 oz.

ORDERING INFORMATION: Guide bar, chain sent unattached. Instructions, engine oil, and bar wrench included. Order chain saw case below.

32 GT 35095—Shipping weight 14 lbs. 2 oz. \$197.95

Replacement 14-inch Barracuda Chain. 32 GT 3624—Shipping weight 9 ounces 21.50

(2) **Black vinyl folding Chain Saw Case.** Fits gas saws 35094 and 35095. Plastic guard included.

ORDERING INFORMATION: 32 GT 36608—Shpg. wt. 1 lb. 6 oz. \$9.49



2.1-cu. in. engine with Chisel chain plus automatic and manual oilers
With 14-inch guide bar **\$167⁹⁵**

CHISEL CHAIN: Long-wearing, chrome-plated. **14-INCH GUIDE BAR:** Solid steel, hardened welded tip. Handles most friction and heat generated by hard cutting.

2.1-CUBIC INCH ENGINE: 2-cycle engine with spark and noise-arresting muffler to help keep fire hazard and noise to a minimum. 11-oz. magnesium fuel tank. All-position carburetor with reliable power to cut and trim in almost any position... even upside down. Needle bearings; chrome-plated cylinder walls.

AUTOMATIC AND MANUAL CHAIN OILERS: Automatic for normal-use cutting; manual oiler for heavy and hard-use cutting.

HOUSING: Lightweight red magnesium frame. Tubular front handle, die-cast rear handle with rubber hand grip. Weighs 10 lbs. 4 oz.

ORDERING INFORMATION: Guide bar, chain sent unattached. Instructions, engine oil and bar wrench included. Order chain saw case at left.

32 GT 35094—Shpg. wt. 13 lbs. 10 oz. \$167.95

Replacement 14-inch Chisel Chain. 32 GT 3613—Shipping weight 8 ounces 16.50



1.9-cu. in. engine with Chisel chain and automatic oiler
With 10-inch guide bar **\$109⁹⁵**

CHISEL CHAIN: Non-chrome-plated. **10-INCH GUIDE BAR:** Solid steel, hardened welded tip. Handles most friction and heat generated by hard cutting.

1.9-CUBIC INCH ENGINE: 2-cycle engine with spark and noise-arresting muffler. 10-oz. magnesium fuel tank. All-position carburetor. Needle bearings; chrome-plated cylinder walls.

AUTOMATIC CHAIN OILER: Keeps chain oiled for normal-use cutting.

HOUSING: Lightweight red magnesium frame. Tubular front handle, die-cast rear handle. Weighs only 9 pounds 5 ounces... our lightest gas chain saw.

ORDERING INFORMATION: Guide bar, chain sent unattached. Instructions, engine oil and bar wrench included. Order chain saw case below.

32 GT 35082—Shpg. wt. 12 lbs. 2 oz. \$109.95

Replacement 10-inch Chisel Chain. 32 GT 3622—Shpg. wt. 6 oz. 9.50

(3) **Black plastic rigid Chain Saw Case.** Fits super-lightweight gas saws 35082 and 35083.

ORDERING INFORMATION: 32 GT 36607—Shpg. wt. 3 lbs. 8 oz. \$10.95

... there's a big selection of Equipment, Supplies and Accessories in our **Suburban, Farm and Ranch Catalog** ask for your **FREE** copy at your Sears Catalog Selling Unit

SEARS HAS IT

Single-voltage Power Plants

... produce 120-volt current




Our best single-voltage plants with battery charger provision

Item (1) 2000 watts, 5 HP **\$444.95** Item (2) 1700 watts, 4 HP **\$354.95**

3½-HP engine delivers 1350 watts ... our lightest, most portable power plant

\$259.95

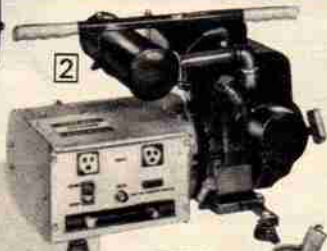


Power Plants

Take the worry and inconvenience out of power failures and brownouts by providing portable power at home, work site, farm and camp... whenever and wherever you need electricity


Dual-voltage Power Plants

... produce both 120, 240-v. currents

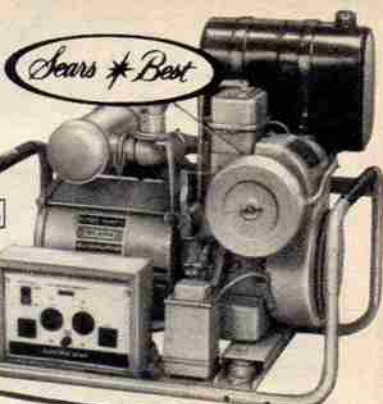

Our largest electric-start plants with vibration-reducing cradle mounts

7000 watts, 16 HP **\$1379.95** 5700 watts, 14 HP **\$1299.95**

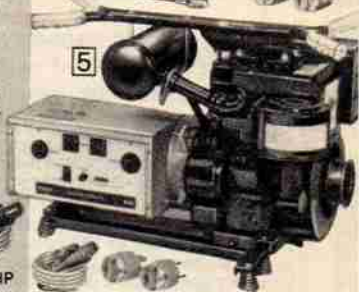

3500 watts, 8 HP **\$819.95** Manual start **\$719.95** 2750 w., 7 HP **\$549.95** Manual start

4500 watts 10 HP **\$919.95** Manual start

(1 thru 3) Single-voltage Power Plants

ENGINE: Compression release and smooth recoil starters for simplified starting on these air-cooled, 4-cycle, 3600-rpm engines.

ALTERNATOR: Grained steel cores help maintain magnetism for constant generation of electricity. Sealed bearings. Built-in overload protection helps protect electric motors from burnouts... can not hurt alternator. Extra 25% surge power on all three single-voltage power plants for starting big electric motors.

SPARK-ARREST MUFFLER: Each unit includes spark-arrest muffler that meets U.S. Forest Service Standard 5100-1a for use in national parks. (1 and 2) 2000-watt and 1700-watt power plants come with oversized, swirl-chamber mufflers to help cut engine noise to a minimum... quieter than standard-type mufflers. (3) 1350-watt plant with standard-size muffler.

ELECTRICAL INFORMATION: Two single-phase 120-volt, 60-cycle AC outlets, hooded for protection. (1 and 2) 2000-watt and 1700-watt units include a battery charger for up to 8 amps DC power for 12-volt batteries (cables included). Overload warning light on the control panel turns off under overload condition to warn of dropping voltage levels. (1) 2000-watt unit includes electronic voltage regulating system that helps keep voltage at ± 2 volts at 60 cycles... helps prevent high temperature drop, gives high surge capacity and helps engine recover from sudden load changes.

CONSTRUCTION: Spring-mounted units with vibration-dampeners at bottom to help absorb engine vibration. Aztec gold color and black aluminum and steel housing with rubber grip carrying handles. Each plant runs about 2 hours on one full tank of fuel. (1 and 2) 2000-watt and 1700-watt units with modular construction and control panel for convenient location of controls and outlets.

(4 thru 6) Sears Best Dual-voltage Power Plants

ENGINE: Air-cooled, 4-cycle, 3600-rpm with compression release.

ALTERNATOR: Grained steel cores. Sealed bearings. Built-in overload protection helps prevent damaging electric motors. Extra 25% surge power.

SPARK-ARREST MUFFLER: Each unit includes oversized, swirl-chamber, spark-arrest muffler—meets U.S. Forest Service Standard 5100-1a for use in national parks and campsites.

ELECTRICAL INFORMATION: Groups 4 outlets, two 120-volt outlets; one 120-volt locking-type outlet (with 3-prong locking-type male adapter); one 240-volt locking-type outlet (with 4-prong locking-type male adapter). On-off switch and fuse for battery charger. Battery-charging terminals on all plants for up to 8 amps DC power for 12-volt batteries (cables included). (5 and 6) 4500-watt, both 3500-watt units and 2750-watt unit with electronic voltage regulating system... helps keep voltage at ± 2 volts at 60 cycles; prevents high temperature voltage drop and helps engines recover from sudden load changes; gives high surge capacity. (6) 2750-watt and both 3500-watt units with full capacity switch... channel full wattage to one 120-volt outlet for large 120-volt single loads. (4 and 6) 5700 and 7000-watt units and 3500-watt unit (electric-start units) with remote control switch (need three 18-gauge lead wires for use up to 150 feet plus 12-volt battery with minimum 39 amps warm; 50 amps cold weather starting).

CONSTRUCTION: Spring-mounted units with vibration dampeners at bottom to help absorb engine vibration. Aztec gold color and black aluminum and steel housing with rubber grip handles. Each plant runs about 2 hours on one full tank of fuel. (4) 5700 and 7000-w. units have cradle mounts with rubber dampeners that absorb vibration and lessen noise and overhead valve cast-iron engines.

SPECIFICATIONS. ORDER INFO: The National Electric Code requires a ground-fault circuit interrupter for 5000-w. or more power plants if used on construction sites. We recommend it for all uses. For 7000-w. (F32GT32193N) pay motor carrier charges from factory in Waukesha, Wis.; allow extra time; no C.O.D. orders.

Power plant voltage type	Wattage		Catalog Number	Shpg. wt.	Price	Engine HP input and type	Type starter	Gas-tank capacity	No. of handles	AC outlets		Dimensions			Actual weight
	Rated	Surge								120-v.	240-v.	Length	Width	Height	
(1) Single-voltage	2000-w.	2500-w.	32 GT 32047N	113 lbs.	\$444.95	5-HP Briggs & Stratton®	Manual	¾ gal.	Dual-grip	2	—	23 in.	18 in.	18 in.	98 lbs.
(2) Single-voltage	1700-w.	2125-w.	32 GT 32152N	80 lbs.	\$354.95	4-HP CRAFTSMAN®	Manual	½ gal.	Dual-grip	2	—	20 in.	19 in.	16 in.	70 lbs.
(3) Single-voltage	1350-w.	1687-w.	32 GT 32046N	78 lbs.	\$259.95	3½-HP CRAFTSMAN®	Manual	½ gal.	Single-grip	2	—	20 in.	19 in.	16 in.	65 lbs.
(4) Dual-voltage	7000-w.	8750-w.	F32 GT 32193N	260 lbs.	\$1379.95	16-HP CRAFTSMAN®	Electric	2½ gal.	Cradle-mounts	3	1	29 in.	20 in.	24 in.	235 lbs.
(5) Dual-voltage	5700-w.	7125-w.	32 GT 32192N	250 lbs.	\$1299.95	14-HP CRAFTSMAN®	Electric	2½ gal.	Cradle-mounts	3	1	29 in.	20 in.	24 in.	225 lbs.
(6) Dual-voltage	4500-w.	5625-w.	32 GT 32194N	175 lbs.	\$919.95	10-HP Briggs & Stratton®	Manual	1½ gal.	4-section	3	1	28 in.	16 in.	17 in.	155 lbs.
(7) Dual-voltage	3500-w.	4375-w.	32 GT 32189N	167 lbs.	\$819.95	8-HP CRAFTSMAN®	Electric	1 gal.	Dual-grip	3	1	27 in.	16 in.	17 in.	147 lbs.
(8) Dual-voltage	3500-w.	4375-w.	32 GT 32188N	165 lbs.	\$719.95	8-HP CRAFTSMAN®	Manual	1 gal.	Dual-grip	3	1	27 in.	16 in.	17 in.	145 lbs.
(9) Dual-voltage	2750-w.	3437-w.	32 GT 32178N	145 lbs.	\$549.95	7-HP CRAFTSMAN®	Manual	1 gal.	Dual-grip	3	1	24 in.	19 in.	17 in.	125 lbs.

2500 or 4000-watt Portable Single-voltage Alternators... hook up to your own gas engine

Lightweight, compact—take it with you anywhere there's a job to be done. Great for job sites, summer homes, cottages or any remote area. Stores in small area when not in use.

CONSTRUCTION: Built-in voltmeter right on control panel lets you see at a glance if voltage is adequate—if not, simply adjust engine speed... helps protect motors from damage caused by not enough voltage. Hood over control panel helps shield voltmeter and outlets from weather and dirt. Belt-drive.

ELECTRICAL INFORMATION: Operates in either direction at 3600 rpm. Deliver steady 60-cycle AC electricity.

INSTALLATION: Just mount alternator on board and hook it up to your own gas engine (see horsepower requirements in table below).

ORDERING INFORMATION: Use chart below. See "N" suffix, page 92.

Wattage	Size, inches			Outlets (AC)		Shaft inches	Engine needed			Catalog Number	Shpg. wt.	Price
	L	W	H	120-v	240-v		HP	Pulleys	V-belts			
2500	12	7½	8	2	—	.669	6	3¾-in.	½-in.	32 GT 32057L	48 lbs.	\$284.95
4000	15	7½	8	2	1	¾	10	Double, 4-in.	Two, ½-in.	32 GT 32058N	69 lbs.	\$394.95

2500-watt unit... requires minimum 6-HP engine **\$284.95**

4000-watt unit... requires minimum 10-HP engine **\$394.95**



COMPASS LAEG. 2 Sears 81

Our most
POWERFUL
Steam
Cleaner!

Portable Steam Cleaners produce fast, efficient and penetrating steam that dissolves ground-in dirt, grease and kills germs on equipment



Our largest capacity Cleaner converts 110 gal. of water per hour to steam at 100 lbs. per sq. in. pressure

(1) Tow-bar electric-driven Steam Cleaner

HOW IT WORKS: Detergent solution, heat and water combine to achieve pressurized steam in only 3 min. Rinse control; cold water rinse attachment included. Unit utilizes pressure or gravity water systems.

CAPACITY: Converts 110 gallons of water per hour to piercing steam at 100 pounds per square inch pressure—about 84% more water conversion than units at right. 6-gallon float-controlled solution tank. Large 10-gallon fuel tank . . . burns No. 1 fuel oil.

MOTOR, PUMP: Atomizer gun-type burner with 1/2-HP motor smoothly operates squirrel cage blower and fuel pump. Cold water wrapped coils. Single-piston water pump driven by 1/2-HP motor.


SPRAY GUN, HOSE: Gun with insulated rubber handle. Extra-long 20-foot hose for wide areas.

DIMENSIONS, WHEELS: 58x26x34-inch high cleaner rolls on 10x2.75-inch semi-pneumatic tires.

ELECTRICAL INFORMATION: 110-120-volt, 60-cycle AC. Uses 1357 watts. 3-wire stub cord included.

ORDERING INFORMATION: See Shpg. Note at right. F32 GT 44511N—Shpg. wt. 490 lbs. \$789.95

\$789⁹⁵

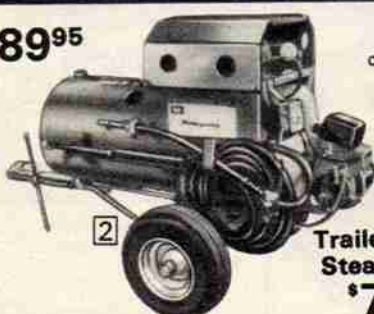

Trailer-mounted Steam Cleaner \$729⁹⁵

These 2 cleaners convert 60 gallons of water per hour to steam at 100 lbs. per sq. in. pressure



Tow-bar Steam Cleaner \$719⁹⁵
Electric-driven

(2 and 3) Trailer-mounted and tow-bar Cleaners

HOW IT WORKS: Detergent solution, heat and water combine to achieve pressurized steam in only 3 min. Includes rinse control for clear water rinse, cold water rinse attachment. Utilize pressure or gravity systems. **CAPACITY:** Convert 60 gallons of water per hour to penetrating steam at 100 lbs. per sq. in. pressure. Reservoir capacity of 6-gallon float-controlled tank. Burns No. 1 fuel oil from large 10-gallon fuel tank.

MOTOR, PUMP: Atomizer gun-type burner . . . 1/2-HP motor (except F32 GT 44504N) operates squirrel cage blower and fuel pump. Cold water wrapped coils. Single-piston water pump powered by 1/4-HP motor (except F32 GT 44504N). Low center of gravity design for stability.

SPRAY GUN, HOSE: Gun with heat-resistant rubber handle. Extra-long 20-foot hose for wide coverage.

(2) Trailer-mounted, electric-driven Steam Cleaner

DIMENSIONS, TIRES: Cleaner is 59 1/2 x 39 1/2 x 47 in. high. Two 4.80-4.00x8-in. pneumatic tires.

ELEC. INFO: 110-120-v., 60-c. AC. 1104 w.; 3-wire stub cord.

ORDER INFO: See Shipping Note below. Wt. 450 lbs.

F32 GT 44508N \$729.95

(3) Tow-bar, electric-driven Steam Cleaner

DIMENSIONS, TIRES: Cleaner is 55x23x29 in. high. Four 8-in. tires; wheels lock . . . won't roll away.

ELECTRICAL INFO: 110-120-v., 60-c. AC. Uses 1100 watts low; 1200 watts high. 3-wire stub cord.

ORDERING INFORMATION: 32 GT 44501N—Wt. 400 lbs. \$719.95

Tow-bar gasoline-driven Steam Cleaner (not shown). Pumps run by 3-HP gas engine; rewind starter, manual-light burner.

DIMENSIONS, TIRES: Cleaner is 55x23x29 in. high. Four 8-in. tires; wheels lock . . . won't roll away.

ORDERING INFO: See Shipping Note below. Wt. 400 lbs.

F32 GT 44504N \$699.95

SHIPPING NOTE

"F" items (such as F32 GT 44511N) pay motor carrier charges from the factory near Vermillion, South Dakota. Allow extra time for delivery. Sorry no C.O.D. orders.

(4 and 5) Detergent for steam cleaners above

ORDER INFO: U.S. Dept. of Agriculture registered.

(4) **Liquid Detergent.** Bio-degradable. In 5-gal. can. 32 GT 44519L—Shipping weight 50 pounds. . . Can \$31.50

(5) **Powdered Compound.** In 100-pound drum. 32 GT 44518N—Shipping weight 105 lbs. . . Drum \$59.95



Versatile High-pressure Power Washers blast and chisel off the most stubborn dirt and grime from many surfaces with dependable power . . use anywhere water and electricity are available



Our most powerful Power Washer . . delivers 2 gallons per minute at 550 lbs. per sq. in. pressure \$374⁹⁵

(6 and 7) Power Washers

Cleaning vehicles, siding, concrete, other equipment. Use water from tap up to 160'. Blast off surface dirt with high pressure; low pressure setting applies grime-softening detergent . . . switch back to high pressure for final cleansing action.

ELECTRICAL INFORMATION: Built-in electrical input socket helps keep connection off ground and out of water. Thermal overload protector guards motor against burnouts. 110-120-v., 60-c. AC. (6) 1150 watts; (7) 1750 watts.

DIMENSIONS, TIRES: 21x15x19-in. high washers with 2 semi-pneumatic tires.

(6) **Washer with 4-way adjustable nozzle** MOTOR, PUMP, CAP.: 2-piston pump powered by 3/4-HP motor delivers 2 gallons per minute at 550 lbs. per sq. in. pressure . . . more pressure for more cleaning power. Unloader valve helps protect motor, pump.

SPRAY GUN, HOSE: Adjustable nozzle with 3 spray angles: 0°, 15° and 40°; and a fourth spray adjustment for low pressure chemical application. 18-inch pistol grip trigger-operated gun with extra-long 25-ft. neoprene hose.

ORDERING INFORMATION: Chemical container not incl. See "N" suffix, page 92.

32 GT 44626N—Shpg. wt. 55 lbs. \$374.95

Delivers 1.8 gallons per minute at 500 lbs. per sq. in. pressure \$259⁹⁵


(7) Washer with 2-way discharge

MOTOR, PUMP, CAP.: 2-piston pump powered by 1/2-HP motor delivers 1.8 gal. of solution per minute at 500 lbs. per square inch pressure for fast, efficient cleaning.

SPRAY WAND, HOSE: 18-in. pistol grip wand with high pressure discharge for working off dirt initially and for the final rinse; and a low pressure chemical application discharge for applying cleaner. Just turn nozzle while you work . . . no need to stop and return to unit. 20-ft. neoprene hose included.

ORDERING INFORMATION: Chemical container not included. See "N" suffix, page 92.

32 GT 44622N—Shpg. wt. 50 lbs. \$259.95

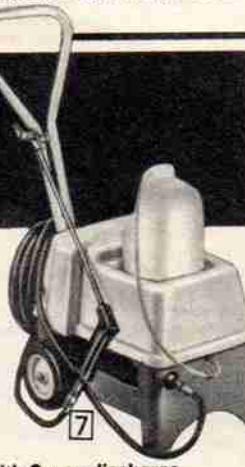

Detergent Cleaners

(8) **Detergent Concentrate.** Reusable container designed to fit power washers at left. Set container in washer unit, attach suction hose . . . no mixing needed. Ideal for general purpose cleaning. 1-gallon.

ORDERING INFO: Shipping weight 9 lbs. 32 GT 44611 . . . Gal. \$5.35

(9) **Heavy-duty Powder Detergent.** Bio-degradable. Industrial strength for extra cleaning power. Removes dirt quickly. Powdered cleaning agents . . . more penetrable power than household soaps.

ORDER INFO: 25-lb. carton. Wt. 28 lbs. 32GT44568C . . . Ctn. \$21.50

FREE! Sears big Suburban, Farm and Ranch Catalog! Over 2,000 items for farm, home and total yard care. Everything from fencing to poultry . . tractors to saddles

Available for pick-up at your nearest Sears Catalog Selling Unit, or ask for a copy when you place or pick up your next merchandise order



These Airless Electric Sprayers let you apply liquids amazingly fast, with minimal overspray ..even spray most latex paints unthinned

BOTH UNITS RUN
ON 110-120-VOLTS



Plug into this outlet

PROFESSIONAL MODEL AIRLESS SPRAYER OUTFIT

Sprays at a rate up to 4 times
faster than conventional
sprayer-compressors
—can deliver up to 1/3 gallon
of paint per minute

\$699⁹⁹

Ideal for commercial housepainting

- Hose and spray gun meet OSHA* requirements
- Electric motor is CSA** and UL listed

HOMEOWNER MODEL AIRLESS SPRAY GUN

\$99⁹⁹

Speeds tricky household
painting—shutters,
patio furniture, ceilings.
Handles most stains,
enamels, varnishes—even
most latex paints unthinned

Use indoors, or out-of-doors with little or no overspray. Minimal overspray means less time spent for masking, less time wasted in after-painting cleanup. Sprays decorative and protective coatings of primers, enamels, lacquers, alkyds, resins, emulsions, stains, varnishes, sealers, solvents, silicone and most latex paints—unthinned. No mess filling paint container, either—suction element inserts directly into paint can. Single control knob for pressure adjustment—prevents surge in spray pattern.

WARRANTY: See full 6-month warranty on airless sprayers below.
DELIVERY RATE: Delivers up to 1/2-gallon (42 ounces) of liquid per minute, at pressures up to 3300 PSI†.

MOTOR: Explosion-proof 1/2-HP motor.

AIRLESS SPRAY GUN: Working parts of durable tungsten carbide. Filter in handle traps dirt before it can clog tip. Safety lock and diffuser; nozzle and trigger guards. Gun and hose meet OSHA* requirements.

DIMENSIONS: Measures 21 1/4 x 13 x 28 inches high.

ACCESSORIES: Paint pump, stand, gun swivel, 2 filters, one .015 tip, 25 feet of 1/4-inch spray hose (can use up to 200 feet of hose), tool kit and operating manual.

ELECTRICAL INFORMATION: UL, CSA** listed, with 6-foot, 3-wire cord. 110-120-v., 9-amp., 60-Hz. AC, 465 watts at maximum pressure. Fused for 20-amp, slow fuse.

ORDERING INFO: Partly assembled. See "N" suffix, page 92.

30 GT 15558N—Shipping weight 80 pounds\$699.99

*OSHA=Occupational Safety and Health Act

**CSA=Canadian Standards Association

†PSI=Pounds per Square Inch

Accessories for Professional Model

Additional High-pressure Spray Hose

Use with professional-model (30 GT 15558N) airless sprayer only. Flexible 1/4-in. nylon hose with ground wire. *Hose Connector* below.

LENGTHS AND ORDERING INFORMATION:

30 GT 16213—25-foot length. Shipping weight 2 pounds.....\$29.99

30 GT 16214—50-foot length. Shipping weight 4 lbs. 8 oz.\$56.99

High-pressure Hose Connection Nipple

Use for joining high-pressure airless hoses together. Steel, 1/4-inch.

ORDERING INFORMATION:

30 GT 16215—Shipping weight 2 ounces\$1.19

Airless Tips for spraying various materials

SIZES, USES AND ORDERING INFORMATION:

30GT16203—.011-inch diameter for lacquers, stains. Wt. 3 oz. ...\$23.99

30GT16204—.013-inch diameter for primers, oil-base. Wt. 3 oz. ...\$23.99

30GT16205—.015-inch diameter for latex. Shpg. wt. 3 oz.\$23.99

FULL SIX MONTH WARRANTY ON AIRLESS SPRAYERS: For six months from the date of purchase, we will repair any Sears airless sprayer, free of charge, if failure occurs due to defects in materials or workmanship. This warranty service is available by simply returning the sprayer to any Sears Store or Service Center throughout the United States.

Airless spray gun comfortably fits the hand, weighs less than four pounds unfilled. Use it everywhere with confidence—even indoors. There's little or no overspray—so there's less time spent in pre-painting preparation, after-painting cleanup. Sprays decorative and protective coatings of lacquers, stains, varnishes, sealers, solvents, silicone, wax, paint. Sprays most latex paints unthinned.

WARRANTY: See full 6-month warranty on airless sprayers below, left.

SPRAY RATE: Delivers up to 10 1/2 oz. of liquid per min.

MOTOR: Electromagnetic linear motor.

AIRLESS SPRAY GUN: Single control knob adjusts spray pattern. Working parts of rugged tungsten carbide. Nozzle guard. Aluminum pump housing holder speeds heat transfer. Housing and handle of plastic—highly resistant to organic solvents, humidity. One-quart liquid reservoir. For big jobs, order suction tube below.

DIMENSIONS: 8 1/4 x 5 x 9 3/4 inches high.

ACCESSORIES: Includes operating instructions.

ELECTRICAL INFORMATION: With 6-foot, 3-wire cord. 110-120-volts, 85 watts. 1.9 amps. 60-Hz. AC. UL listed.

ORDERING INFORMATION:

30 GT 15528—Shipping weight 4 pounds\$99.99

Accessories for Homeowner Model

(1) Flexible Extension Nozzle with nozzle guard

Spray ceilings; hard-to-reach objects.

ORDERING INFORMATION:

30 GT 16313—Shpg. wt. 2 oz. ...\$10.99

5-foot Suction Tube

Fast, clean. Ends cup-filling step... lets you spray directly from large container. Plastic.

ORDERING INFORMATION:

30 GT 16315—Shpg. wt. 4 oz. ...\$10.99


Round Jet Nozzle Set

Set of 3 nozzles. Use .4mm when spraying fine lacquers, varnishes, stains; .6mm for enamel, oil-base, primers; .8mm for latex, other heavy-bodied materials.

ORDERING INFORMATION:


30 GT 16314—Shpg. wt. 2 oz. ...\$19.99

Flexible
Extension
Nozzle (1)
lets you spray
ceilings



COMPBK
SLAEGJD Sears 83

The air tanks and safety valves on these Stationary **ELECTRIC** Air Compressors meet the **ASME†** code...and all models have belt guards for your protection

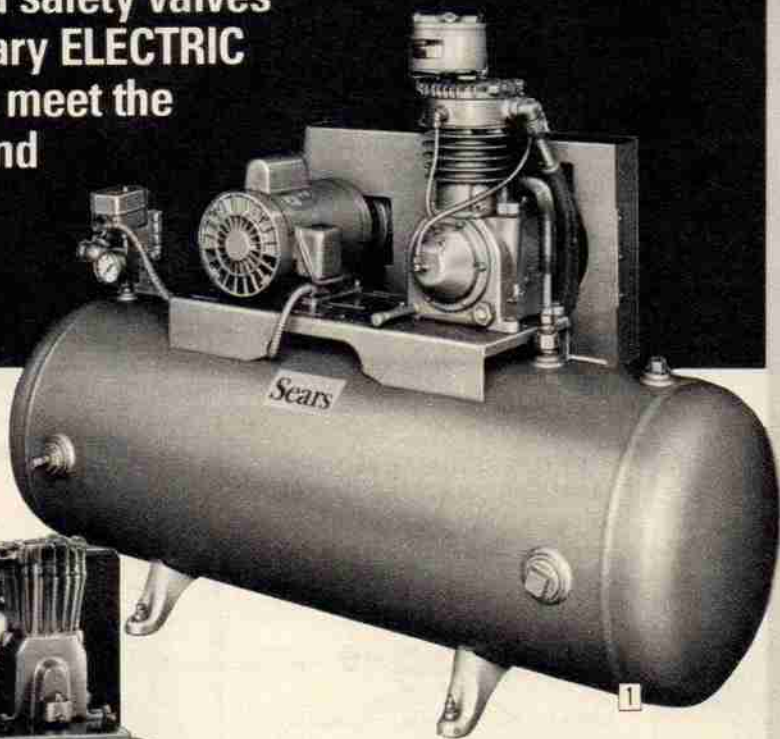

Cramped for space?

This vertical model, available in three sizes could solve your space problem

Single-stage Stationary Electric Air Compressors in sizes from 1/2-HP to 3-HP

Low as **\$254⁹⁹** 1/2-HP

Full one-year Warranty on non-Craftsman Air Compressor: If any of these air compressors fail due to a defect in material or workmanship within one year from the date of purchase, return it to any Sears Store throughout the United States and we will repair it, free of charge.

DELIVERY RATES: "Delivered air SCFM**", in chart below, is rated at cut-out pressure of 125 PSI**. Delivers higher SCFM when operating at lower PSI.

AIR STORAGE TANKS: Pressure gauge and safety valve meet ASME code.

COMPRESSOR, MOTOR: Automatic switch starts pump load-free. Check and safety valves; overload-protected motors. Safety belt guard.

DIMENSIONS: See chart below.

ELECTRICAL INFORMATION: 6-foot cord. See chart below for voltage, watts.

ORDERING INFORMATION:

HP	Number of Cylinders	Delivered air SCFM**	Tank size, gallons	Watts at maximum pressure	Size, LxWxH, inches	Catalog Number	Shpg. wt., lbs.	Price
These units operate on 110-120-volts, 60-cycle AC, 1 PHASE								
1/2	1	3.0	20	1400	31 x 19 1/2 x 27	30 GT 17012N	129	\$254.99
3/4	2	5.0	30	2300	39 x 24 x 31	30 GT 17031N	205	299.99
This unit operates on 110-120 or 220-240-volts, 60-cycle AC, 1 PHASE								
1	2	5.3	30	2400	39 x 24 x 31	30 GT 17051N	206	319.99
These units operate on 220-240-volts, 60-cycle AC, 1 PHASE								
2	2	8.3	30	2700	39 x 24 x 31	30 GT 17081N	216	359.99
3	2	9.4	30	2900	39 x 24 x 31	30 GT 17091N	240	389.99

Sears Has a Credit Plan to Suit Most Every Need
See Big Book or ask for details

Our most powerful Stationary Electric Air Compressors compress air in two stages

Low as **\$949⁹⁹** 5-HP, three phase

Full one-year Warranty on non-Craftsman Air Compressor. If any of these air compressors fail due to a defect in material or workmanship within one year from the date of purchase, return it to any Sears Store throughout the United States and we will repair it, free of charge.

DELIVERY RATES: "Delivered air SCFM**", in chart below, represents actual air delivered, not displaced, at 175 PSI**. Delivers higher SCFM when operating at lower PSI.

AIR STORAGE TANKS: Rugged, heavy-duty units with tank pressure gauge and safety valve meet ASME† code. Giant 80-gallon air storage tank.

COMPRESSOR, MOTOR: Built with the stamina for garage or industrial use to run hydraulic lifts or operate any air tool. Two-stage compressor means these units can deliver higher constant pressure up to 175 PSI and run cooler, last longer than single-stage units. Dual-stage pumps start load-free when pressure drops about 25 pounds below the cutout point. Centrifugal unloader for load-free starts. Fan-bladed flywheel, positive controlled lubrication and enclosed crankcase. All models have protective belt guard.

DIMENSIONS: See chart below.

ELECTRICAL INFORMATION: Be certain proper electrical power is available for 3-phase unit. If in doubt, check with local power company. Consult your local electrical contractor for recommended wiring and electrical codes. Order magnetic starter from your local electrical contractor. See chart below for voltage requirements and watts used.

ORDERING INFORMATION:

(1) Compressors with horizontal air tanks

HP	Delivered air SCFM*	Tank size, gallons	Watts at maximum pressure	Size, LxWxH, inches	Catalog Number	Shipping weight, pounds	Price
This unit operates on 110-120 or 220-240-volt, 1 PHASE 60-Hertz AC							
3	11.5	80	3500	64 x 25 x 47	30 GT 17313N	520	\$999.99
This unit operates on 220-240-volt, 1 PHASE 60-Hertz AC							
5	17.0	80	6000	64 x 23 x 43 1/2	30 GT 17316N	520	1099.99
These units operate on 220-240-volt, 3 PHASE 60-Hz, convert to 460-v., 3 PHASE							
5	17.0	80	6000	64 x 23 x 43 1/2	30 GT 17315N	510	949.99
7 1/2	24.5	80	7600	68 x 23 x 49	30 GT 17318N	660	1599.99
10	35.2	80	11500	68 x 23 x 49	30 GT 17319N	700	1999.99

(2) Compressors with vertical air tanks

HP	Delivered air SCFM*	Tank size, gallons	Watts at max. pressure	Size, LxWxH, inches	Catalog Number	Shipping weight, pounds	Price
This unit operates on 110-120 or 220-240-volt, 1 PHASE 60-Hertz AC							
3	11.5	80	3500	38 x 17 1/2 x 75	30 GT 17333N	850	\$999.99
This unit operates on 220-240-volt, 1 PHASE 60-Hertz AC							
5	17.0	80	6000	33 x 17 1/2 x 67 1/4	30 GT 17336N	530	1099.99
This unit operates on 220-240-volt, 3 PHASE 60-Hz. AC. Converts to 460-v., 3 PHASE							
5	17.0	80	6000	33 x 17 1/2 x 67 1/4	30 GT 17335N	530	949.99

*SCFM=Standard Cubic Feet per Minute **PSI=Pounds per Square Inch
†ASME=American Society of Mechanical Engineers

Two-stage, 10-HP gasoline-powered Air Compressor with 30-gal., ASME†-coded, cradle-mounted air tank

The ideal unit for tire service trucks, lubrication trucks, utility vehicles. Provides dependable, heavy-duty air power at the job site. Operates our sandblaster and caulk gun, both on page 89.

Full one-year Warranty on non-Craftsman Air Compressors. If this air compressor fails due to a defect in material or workmanship within one year from the date of purchase, return it to any Sears Store throughout the United States and we will repair it, free of charge.

DELIVERY RATE: Delivers 18.2 SCFM* at 175 PSI**.

AIR STORAGE TANK: 30-gal. tank (meets ASME† code), cradle-mounted to reduce vibration. Air pressure gauge 0-300 lbs.; 5-lb. graduations.

COMPRESSOR ENGINE: Two-stage compressor with centrifugal unloader; drain and service valves. Constant-speed head unloaders; pilot set at 160-175 PSI. Removable elements in intake filter silencer for ease of servicing. Multiple "V"-belt drive with protective belt guard. 10-HP, 4-cycle gasoline-powered engine with electric starter for starting ease. Requires 12-v. system. Pneumatic throttle control automatically slows engine during non-pumping cycle. 1½-gal. tank; runs to 3 hrs. on one fill-up.


DIMENSIONS: 39x23x40 inches high.

ACCESSORIES: With 12-foot long battery cables.

ORDERING INFORMATION:

30 GT 17317N—Shipping weight 490 pounds \$1079.99

\$1079.99

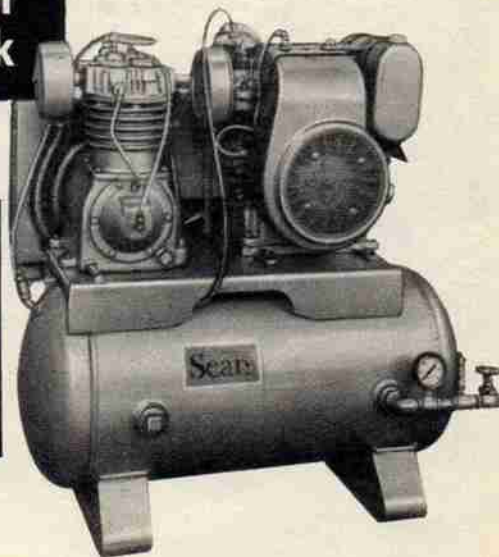

Compressor Accessories add the versatility you need to handle a wide variety of jobs



(1) Air Filter and Regulator Gauge. Filters out oil, water, dust before air enters gun. For air lines delivering up to 150 PSI*. Controls 5 to 175 PSI. ¼-in. outlets with 2 regulated ports. Mounts on tank or wall. ORDERING INFO: Wt. 2 lbs. 5 oz. 30 GT 16023 \$19.99

(2) Heavy-duty Pressure Regulator Gauge. Controls 0 to 125 PSI*. Female thread connects to paint or air tank.

SIZES, ORDERING INFORMATION:
Shipping weight 2 lbs. 12 oz.
30 GT 16032—¼-in. thread \$10.59
30 GT 16033—½-in. thread 10.59

Medium-duty Regulator Gauge. Controls 0 to 100 PSI*. ¼-in. female thread. For air, paint tank; air line. ORDERING INFORMATION: 30 GT 16031—Wt. 1 lb. \$8.99

(7) Tank Shut-off Globe Valve. Forged brass. With ¾-in. diam. fittings. ORDERING INFORMATION: 30 GT 16257—Shipping weight 6 ounces \$4.29

(3) Portable Air Filter. Up to 150 PSI*. With 5 feet of ¼-in. hose. ORDERING INFO: Wt. 2 lbs. 4 oz. 30 GT 16012 \$11.69

(4) Pressure Gauge. For air, water, oil. Up to 200 PSI*. ¼-in. thread. ORDERING INFORMATION: 30 GT 16042—Wt. 3 oz. \$2.89

(5) Oil Fog Lubricator. Prevent friction damage. Adjustable feed control. Install with (2) and (5). ORDERING INFORMATION: Shipping weight 1 lb. 10 oz. 30 GT 16016—¼-in. thread \$13.69 30 GT 16017—½-in. thread 13.69

(6) Air Line Filter. Cleans air. ORDERING INFORMATION: Shipping weight 1 pound 6 ounces. 30 GT 16008—¼-in. thread \$11.69 30 GT 16009—½-in. thread 11.69

(8) Ball Valves. Heavy-duty cast bronze. Rated at 400 PSI for water, gas, oil or air applications.

SIZES, ORDERING INFORMATION:
30 GT 16293—¾-in. Shipping weight 4 oz. \$4.99
30 GT 16294—½-in. Shipping weight 4 oz. 5.39
30 GT 16295—¾-in. Shipping weight 7 oz. 6.89

(9) Check Valves. Brass cast for water, gas, oil or air at 250 PSI maximum pressure. All valves have ½-in. NPT plugged tap for pressure switch release valves on air applications.

SIZES, ORDERING INFORMATION:
30 GT 16261—¼-in. Shipping weight 6 oz. \$4.99
30 GT 16262—¾-in. Shipping weight 8 oz. 5.09
30 GT 16263—½-in. Shipping weight 12 oz. 7.79
30 GT 16264—¾-in. Shipping weight 1 lb. 3 oz. 8.79

(10) Tank Drain Valve. Brass. With ¼-in. diameter fittings. ORDERING INFORMATION: 30 GT 16253—Shipping weight 2 ounces 99c

(11) Tee Adapter. Brass. Operates two spray guns at once. ¼-in. diam. fittings. ORDERING INFORMATION: 30 GT 16217—Shipping weight 2 ounces \$2.99

(12) Inflator Kit. Use with any of our compressors. With inflator needle, inflator, air duster, all-purpose inflator, tire inflator, adaptor. Attach to end of air hose. ORDERING INFORMATION: 30 GT 16276—Shipping weight 1 ounce Kit \$2.69



Connectors for hose, tank

(13) Quick Connector Sets. 4-piece sets for male, female couplings. Use with air hose only. Steel. ORDERING INFO:

¼-in. Quick Connector Set.
30 GT 16244—Wt. 7 oz. .Set \$2.99
¾-in. Quick Connector Set.
30 GT 16246—Wt. 9 oz. .Set \$2.99

(14) ¼-in. Male, Female Studs. Use with (13) above. Package of 3 male, 1 female. ORDERING INFORMATION: 30 GT 16245—Wt. 4 oz. Pkg. \$1.49

(15) Double Male Couplings. Use to connect hoses together. Brass. Package of 3. ORDERING INFORMATION: ¼-in. Shipping weight 2 oz. 30 GT 16281 Pkg. \$1.29 ¾-in. Shipping weight 4 oz. 30 GT 16291 Pkg. \$1.69

Air Chucks, Blow Guns

(16) Long Air Chuck and Gauge. Indicator reads 10 to 120 PSI. 15-inch hose, 6-inch chuck. Turns 360°. With ¼-in. female thread. ORDERING INFORMATION: 30 GT 16311—Shipping weight 1 lb. 8 oz. \$13.69

(17) Dual Tire Air Chuck. ¼-in. female thread. ORDERING INFO: Shipping weight 5 oz. 30 GT 16272 \$2.19

(19) Heavy-duty Blow Gun. With easy-control lever. Round and fan tips. With ¼-in. female thread. ORDERING INFORMATION: 30 GT 16232—Shipping weight 9 oz. \$3.19

(20) Professional-type Blow Gun. Meets OSHA (Occupational Safety and Health Act) requirements. Outlet pressure drops to less than 30 PSI when dead-ended. Lever action. Round tip. Maximum inlet pressure 135 PSI. With ¼-in. female thread. ORDERING INFORMATION: 30 GT 16236—Shipping weight 7 oz. \$3.69

(18) Air Chuck. Brass. ORDERING INFO: Wt. 3 oz. ¼-in. male thread. 30 GT 16269 99c ¼ in. female thread. 30 GT 16271 99c

(21) Rubber and rayon Air, Paint Hoses

Use extra hose instead of extension cord to reach project . . . improper cord may cause voltage drop, motor burnout. **Air Hose:** ¼-in. fittings; 800-lb. bursting strength; 200-lb. working pressure. **Paint and lacquer hoses:** ¾-in. fittings; 1000-lb. bursting strength; 250-lb. working pressure.

USES, SIZES AND ORDERING INFORMATION:

Use for	Inside diam.	Length	Catalog Number	Shipping wt.	Price
Air only	¼-in.	15 ft.	30 GT 16161	1 lb. 9 oz.	\$7.99
Air only	½-in.	25 ft.	30 GT 16171	4 lbs.	10.99
Air only	¾-in.	30 ft.	30 GT 16175	7 lbs. 6 oz.	19.99
Air only	¾-in.	15 ft.	30 GT 16181	2 lbs. 6 oz.	9.49
Paint only	¾-in.	15 ft.	30 GT 16191	2 lbs. 2 oz.	8.99
Paint only	¾-in.	25 ft.	30 GT 16201	3 lbs. 7 oz.	11.99
Paint, lacquer	¾-in.	15 ft.	30 GT 16211	3 lbs. 5 oz.	17.99

(22) Flexible nylon Air Hose. Resists oil, grease, rotting—and it's simple to clean. Stays flexible . . . coils up automatically when not in use. Extends to 25 feet. Working pressure of 200 pounds. ¼-in. male fittings on each end.

ORDERING INFORMATION:
30 GT 16221—Shipping weight 2 lbs. \$9.99

(23) Hose Repair Kit. For use with ¼-in. hose. Includes female fitting, splicer, 3 clamps. ORDERING INFORMATION: 30 GT 16302—Shipping weight 3 oz. Kit \$1.39

†ASME=American Society of Mechanical Engineers

*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch



OUR BEST PORTABLE ELECTRIC SPRAYER-COMPRESSORS

Like all of our famous brand hardware needs, they
had to earn the right to wear the name

Sears * Best

CRAFTSMAN

1/2 and 1-HP Models
RUN ON
110-120-VOLTS




Plug into this
outlet (Adapter
included)

All other Models
RUN ON
220-240-VOLTS



Plug into
this outlet

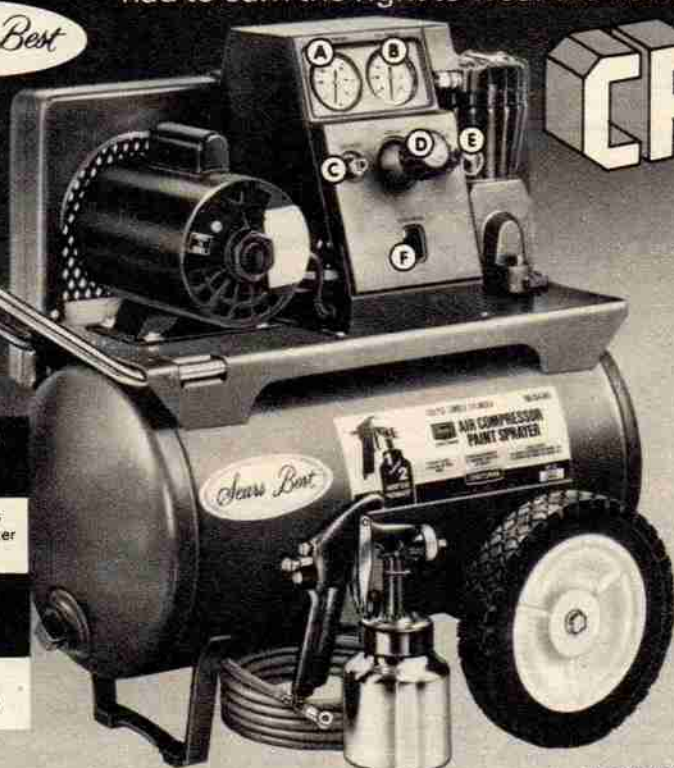

Here's what makes these
Sprayer-Compressors so outstanding:

- (A) Regulated air pressure gauge
- (B) Tank pressure gauge
- (C) Air hose outlet
- (D) Pressure regulator
- (E) Safety valve meets ASME† code
- (F) Manual head pressure release switch

- All important gauges and switches are grouped in the exclusive control-cluster console
- Five powerful models—from 1/2 to 3-HP—feature air tanks and safety valves which meet ASME† codes
- All backed by Sears CRAFTSMAN Full One Year Warranty

\$254.99 1/2-HP, 1-cylinder

Built for heavy-duty use, with large tank sizes for each horsepower. 1-HP, 1 1/2-HP, 2-HP and 3-HP have sufficient power to operate 2 spray guns simultaneously. Spray paint, fertilizer, insecticides, herbicides—operate air tools, caulk gun. Air-clean machinery—even operate our sandblasters.

CRAFTSMAN full one-year Warranty on Paint Sprayer/Air Compressor: If any CRAFTSMAN Paint Sprayer/Air Compressor fails to give complete satisfaction within one year from the date of purchase, we will repair it, free of charge. This warranty service is available by simply returning the paint sprayer/air compressor to any Sears Selling Unit throughout the United States.

DELIVERY RATES: As indicated in chart at right.

AIR STORAGE TANKS: All tanks and safety valves meet ASME† codes. With line air pressure gauge, air tank pressure gauge, adjustable pressure regulator. See chart at right for tank sizes.

COMPRESSOR MOTOR: 1/2-HP model has 1-cylinder compressor; all other models have 2-cylinder compressors. Vertical cooling fins. Electric motor.

SPRAY GUN: Each unit furnished with one CRAFTSMAN bleeder/non-bleeder type spray gun. Converts from pressure to siphon feed; internal to external mix. Fluid and fan controls. 1 qt. cup. For big spray jobs, order paint tank, page 89.

DIMENSIONS: 1/2-HP, 41x18x28 in. high; 1-HP, 39x17x29 1/4 in. high; 1 1/2-HP, 41x19x31 in. high; 2-HP, 42x19x30 in. high; 3-HP, 50x24x33 in. high.

ACCESSORIES: With air chuck, wrench, how-to-power-spray booklet. 1/2-HP model includes 15 feet of 1/4-inch rubber and rayon air hose; 1-HP, 1 1/2-HP and 2-HP models with 15 feet of 1/4-inch rubber and rayon air hose; 3-HP furnished with 25 feet of 1/4-inch rubber and rayon air hose.

ELECTRICAL INFORMATION: With 6-foot, 3-wire cord. All models 60-Hertz AC. See chart below for voltage requirements and watts used.

ORDERING INFORMATION: Massachusetts customers only order models 30 GT 15459 and 30 GT 15399 sold below.

HP	Catalog Number	SCFM* at 40 PSI**	Maximum PSI**	Tank size	Voltage needed	Watts at max. pressure	Wt. lbs.	Price
1/2	30 GT 15438N	3.0	100	12 gal.	110-120	1400	120	\$254.99
1	30 GT 15458N	6.9	100	12 gal.	110-120	2400	163	\$329.99
1 1/2	30 GT 15468N	8.0	125	20 gal.	220-240	2600	180	\$359.99
2	30 GT 15478N	8.8	125	20 gal.	220-240	2700	186	\$399.99
3	30 GT 15488N	9.7	125	30 gal.	220-240	2900	247	\$509.99

*Convertible to 220-240-volt

Receptacle for all 220-240-volt models.

34 GT 5929—Shipping weight 3 ounces \$1.69

1-HP Model for Massachusetts only. As 6.6 SCFM* at 40 PSI**, max. 125 PSI. 7 1/2 gallon tank; 34x12 1/2x27 inches high. No console or Craftsman warranty.

ORDERING INFORMATION:
30 GT 15459N—Shipping weight 126 pounds \$299.99

2-HP Model for Massachusetts only. Meets Mass. code. 8.3 SCFM* at 40 PSI**. Max. 125 PSI. 20-gallon tank. Measures 42x19x30 inches high. No console or Craftsman warranty.

ORDERING INFORMATION:
30 GT 15399N—Shipping weight 186 pounds \$399.99

**5-HP Gasoline-powered Air Compressor provides air power
anywhere—even miles from an electrical power source**

\$589.99

This unit offers both versatility and portability. Versatility to let you handle a wide variety of jobs around the home, in the shop, or on the farm. Portability to let you operate far afield. Power enough to operate most air tools . . . even our sandblaster and caulk gun (both on page 89). To spray, order spray gun from page 88.

Full One-year Warranty on non-Craftsman Paint Sprayers/Air Compressors: If this paint sprayer/air compressor fails due to a defect in material or workmanship within one year from the date of purchase, return it to any Sears Store throughout the United States and we will repair it, free of charge.

DELIVERY RATE: Delivers 12.1 SCFM* at 40 PSI** . . . 120 PSI maximum.

AIR STORAGE TANK: 20-gallon tank and safety valve both meet ASME† code. With tank pressure gauge.

COMPRESSOR ENGINE: Two-cylinder compressor; 5-HP, 4-cycle Briggs & Stratton® gasoline-powered engine with automatic throttle control. Safety guard fully encloses belt and pulley. 3-quart fuel tank. Runs about 2 hours on one fill-up.

DIMENSIONS: Measures 42x20x32 inches high.

ACCESSORIES: With air chuck, 15 feet of 1/4-inch rubber and rayon air hose, how-to-power-spray instructions.


ORDERING INFORMATION: Bolt-on handle.

30 GT 17557N—Shipping weight 178 pounds \$589.99

*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch


†ASME=American Society of Mechanical Engineers

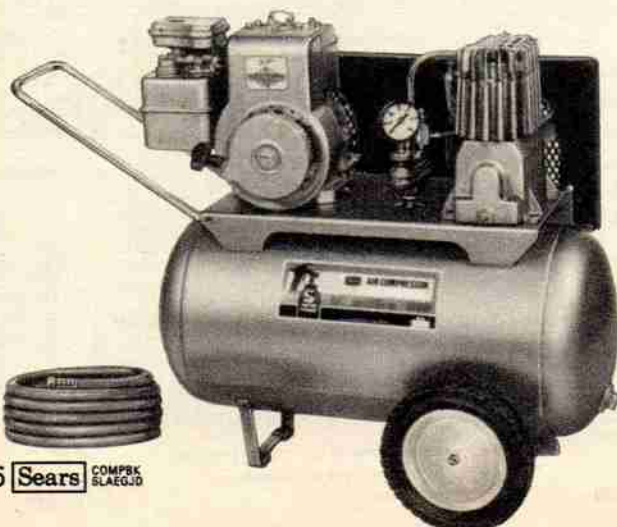


These Portable Electric Units feature a Full One-year Warranty

FULL ONE-YEAR WARRANTY ON NON-CRAFTSMAN PAINT SPRAYER/AIR COMPRESSORS:

If these paint sprayer/air compressors fail due to a defect in material or workmanship within one year from the date of purchase, return it to any Sears Store throughout the United States and we will repair it, free of charge.

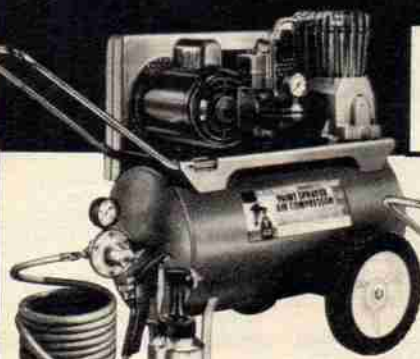

1-HP UNITS RUN ON 110-120 VOLTS



1-HP Portable Electric Sprayer-Compressor

\$309⁹⁹ 1-HP

DELIVERY RATE: Delivers 6.6 SCFM* at 40 PSI** . . 100 PSI max. **AIR STORAGE TANK:** 12-gallon tank. Automatic pressure switch, pressure regulator, tank pressure gauge, line pressure gauge.

COMPRESSOR, MOTOR: Two-cylinder compressor, electric motor. Manual over-load protector. Belt guard. **SPRAY GUN:** Bleeder/non-bleeder gun converts from pressure to siphon feed, internal to external mix. With fluid and fan controls. One-quart cup. For big spray jobs, order paint tank from page 89.


DIMENSIONS: 39x17x29 1/4 in. high. **ACCESSORIES:** Incl. air chuck, 15 ft. of 1/4-in. rubber and rayon air hose, how-to-power-spray booklet.

ELEC. INFO: 6-ft., 3-wire cord. 110-120-v., max. 2400-w., 60-Hz. AC. Use 20-a. slow fuse.

ORDERING INFORMATION: Bolt-on handle. This unit cannot be sold in Arkansas, New Jersey, Oregon, Puerto Rico in compliance with local laws. Order ASME (American Society of Mechanical Engineers) models if you live in these areas, or if unit is to be used for commercial purposes. Mass. customers order 30 GT 15459N, p. 86. See Warranty above.

30 GT 15454N—Wt. 153 lbs. . . \$309.99
Air Compressor Alone. Unit as above, but no Spray gun, pressure regulator.

ORDERING INFO: Bolt-on handle. Shpg. wt. 148 lbs.
30 GT 17454N . . . \$279.99

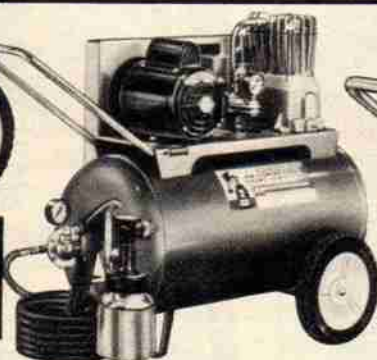

2-HP Portable Electric Sprayer-Compressor

\$379⁹⁹ 2-HP

Use at home, in shops, or on the farm. Handles all spray jobs. Delivers enough air to operate most air tools, run our sandblaster, caulk gun, both on page 89. **DELIVERY RATE:** Delivers 8.3 SCFM* at 40 PSI** . . 125 PSI maximum.

AIR STORAGE TANK: 20-gallon tank and safety valve meet ASME† code. Automatic pressure switch, pressure regulator, tank pressure gauge, line pressure gauge.

COMPRESSOR, MOTOR: Two-cylinder compressor, electric motor. Manual over-load protector. Capacitor-start motor. Protective belt guard for safety.

SPRAY GUN: Bleeder/non-bleeder gun converts from pressure to siphon feed, internal to external mix. Fluid and fan controls. One-quart cup. For big spray jobs, order paint tank from page 89.

DIMENSIONS: 42x19x30 inches high. **ACCESSORIES:** Includes air chuck, 15 feet of 1/4-inch rubber and rayon air hose, wrench, and comprehensive how-to-power-spray booklet.

ELECTRICAL INFORMATION: With 6-ft. 3-wire cord. 220-240-v., 2700-w. at max. pressure, 60-Hz. AC. Use 20-a. slow fuse.


ORDERING INFORMATION: Bolt-on handle. This unit cannot be sold in Massachusetts, in compliance with state laws. Order 30 GT 15399N sold on page 86 if you live in Massachusetts.

Wt. 186 lbs. See warranty above.
30 GT 15378N . . . \$379.99


*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch

†ASME=American Society of Mechanical Engineers

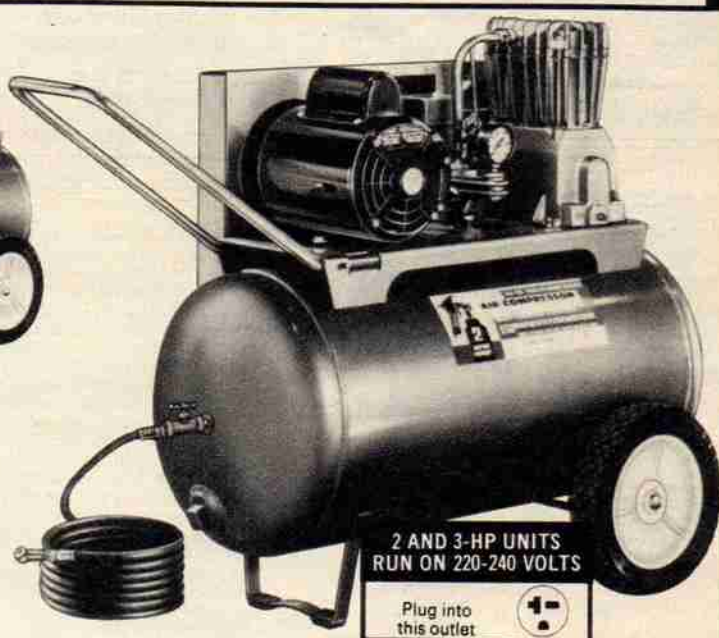

2 AND 3-HP UNITS RUN ON 220-240 VOLTS



Powerful Portable Electric Compressors let you operate two spray guns simultaneously

\$349⁹⁹ 2-HP

Unit delivers enough power to operate most air tools, including large nailers, staplers, tackers. Operate our sandblaster and caulk gun, both page 89. To use as sprayer, order spray gun and pressure regulator with gauge.

ACCESSORIES: Includes air chuck, 15 feet of 1/4-inch rubber and rayon air hose, how-to-power-spray booklet.

ELEC. INFO: 6-ft., 3-wire cord. 220-240-v., 60-Hz., AC. 20-amp slow fuse.

2-HP Model

DELIVERY RATE: Delivers 8.3 SCFM* at 40 PSI** . . 125 PSI max. **AIR STORAGE TANK:** 20-gallon tank. Tank and safety valve meet ASME code. Tank gauge.

COMPRESSOR, MOTOR: Two-cylinder compressor, electric capacitor-start motor. Protective belt guard for your safety.

DIMENSIONS: 42x19x30 in. high. **ELECTRICAL INFO:** 2700-watts at maximum pressure.

ORDERING INFORMATION: Bolt-on handle. See warranty above.
30 GT 17378N—Wt. 181 lbs. . . \$349.99

3-HP Model

DELIVERY RATE: Delivers 9.4 SCFM* at 40 PSI** . . 125 PSI max. **AIR STORAGE TANK:** 30-gallon tank. Tank and safety valve meet ASME† code. Tank gauge.

COMPRESSOR, MOTOR: Two-cylinder compressor, electric capacitor-start motor. Protective belt guard for safety.

DIMENSIONS: 50x24x33 in. high. **ELECTRICAL INFORMATION:** 2900-watts at maximum pressure.

ORDERING INFORMATION: Bolt-on handle. See warranty above.
30 GT 17388N—Wt. 251 lbs. . . \$449.99

(1 thru 5) Replacement Air Pumps

Single-stage pumps (1, 2, 3) powered for use in home, small shop. 2-stage pumps (4 and 5) for heavy-duty use.

PRESSURE MOTOR REQUIREMENTS: For constant pressure, order pressure regulator (page 85). Built to operate with motor running at 1725 rpm and HP as indicated in chart. Use chart to determine air pressure (PSI**) and delivered air (SCFM*) needed. 4 SCFM at 100 PSI will operate most air tools.

FLYWHEEL: Single-stage pumps (1, 2 and 3) have single-grooved "A" flywheel. Two-stage pumps (4 and 5) have double-grooved "A" section flywheels.

*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch

Pump	Bore in.	Stroke inches	For Motor HP	For 40 PSI**		For 90 PSI**		For 125 PSI**		For 175 PSI**	
				Motor pulley	SCFM*	Motor pulley	SCFM*	Motor pulley	SCFM*	Motor pulley	SCFM*
(1)	2 1/4	1 3/4	1 1/2	4.0 in.	1.6	3.5 in.	1.0				
			1 1/2	3.7 in.	2.3	5.0 in.	1.5				
(2)	2 1/4	1 3/4	1 1/2	3.5 in.	3.0	3.5 in.	2.5				
			1 1/2	4.0 in.	3.5	4.0 in.	2.8				
			1	5.5 in.	4.9	5.5 in.	4.0				
(3)	2 3/4	2	1	3.5 in.	6.2	3.5 in.	5.3	3.5 in.	4.9		
			1 1/2	4.0 in.	7.1	4.0 in.	6.1	4.0 in.	5.6		
			2	4.25 in.	7.6	4.25 in.	6.5	4.25 in.	6.0		
(4)	3 1/4	3	1 1/2	6.2 in.	8.6	4.7 in.	6.9	4.5 in.	6.3	3.95 in.	5.6
			2	6.95 in.	9.9	6.2 in.	8.9	6.0 in.	8.3	5.3 in.	7.4
(5)	4 3/4	2 1/2	3			4.6 in.	13.6	4.2 in.	12.7	3.1 in.	10.0
			5			7.4 in.	20.8	6.6 in.	18.0	6.4 in.	17.0

PUMP TYPES, ORDERING INFO:

(1) Single-stage, 1-cyl. Air Pump

30 GT 17501C—Wt. 11 lbs. . . \$56.99

(2) Single-stage, 2-cylinder "V" Air Pump

30 GT 17502C—Wt. 23 lbs. . . \$69.99

(3) Single-stage, 2-cyl. Air Pump


30 GT 17511L—Wt. 40 lbs. . . \$89.99

(4) Two-stage, 2-cylinder Air Pump. Centrifugal unloader for no-load starts.

30 GT 17521N—Wt. 130 lbs. . . \$309.99

(5) Two-stage, 2-cylinder Air Pump. Centrifugal unloader for no-load starts.

30 GT 17523N—Wt. 135 lbs. . . \$339.99

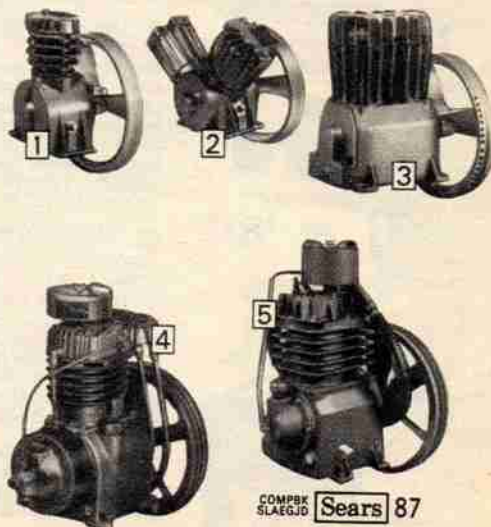

**These CRAFTSMAN Spray Guns
are all backed by our
FULL ONE-YEAR WARRANTY**

Full one-year Warranty on Craftsman Spray Guns: If any Craftsman Spray Gun fails to give complete satisfaction within one year from the date of purchase, we will repair it, free of charge. This warranty service is available by simply returning the spray gun to any Sears Store or Service Center throughout the United States.



**Professional-quality,
production-type
Spray Gun with
drip-free feature**

\$94⁹⁹

Drip-free feature on cup lets you hold gun in any position except upside down

PRESSURE REQUIREMENTS: For compressors 1½-HP or greater, delivering 7.5 to 14 SCFM* at 30 to 70 PSI**.

HEAD, SPRAY CONTROL: Non-bleeder-type, siphon feed, external mix. Stainless steel fluid needle with hardened tip. Sensitive fluid and fan controls offer a wide range of pattern adjustments . . . offer the ability to spray an extensive variety of materials—including automotive enamels, lacquers, primers. Easy-acting trigger for rapid spray response. Aluminum.

CUP: Aluminum, with wide mouth for easy cleaning. 1-quart capacity. 2-prong quick release. For big spray jobs, order paint tank.

ORDERING INFORMATION: See Warranty above.

Shipping weight 3 lbs. 4 oz.
30 GT 15634 \$94.99

*SCFM=Standard Cubic Feet per Minute

**PSI=Pounds per Square Inch



\$51⁹⁹

(1) Professional-quality Spray Gun

PRESSURE REQUIREMENTS: For compressors 1-HP or greater, delivering 5 to 11 SCFM* at 40 to 85 PSI**.

HEAD, SPRAY CONTROL: Stainless steel fluid needle. Sensitive fluid and fan controls offer wide range of pattern adjustments. Non-bleeder-type; siphon-feed; external mix. Black epoxy finish. Made of Aluminum.

CUP: Aluminum, 1-quart. 2-prong quick-release.

ORDERING INFORMATION: See Warranty above.

Shipping weight 3 pounds 2 ounces.
30 GT 15623 \$51.99



\$39⁹⁹

(2) Shop, farm, home Spray Gun

PRESSURE REQUIREMENTS: Needs 4 to 9 SCFM* at 35 to 50 PSI**. For compressors ¾-HP or greater.

HEAD, SPRAY CONTROL: Fluid and fan controls. Bleeder/non-bleeder type. Converts from siphon to pressure feed; internal to external mix. Black epoxy finish speeds cleaning. Aluminum.

CUP: Aluminum, 1-quart. 3-prong quick-release.

ORDERING INFORMATION: See Warranty above.

Shipping weight 3 pounds 4 ounces.
30 GT 15613 \$39.99



\$32⁹⁹

(3) Light-duty Spray Gun

PRESSURE REQUIREMENTS: Needs 3 to 6 SCFM* at 35 to 50 PSI**. For compressors ½-HP or greater.

HEAD, SPRAY CONTROL: Fluid and fan controls. Bleeder/non-bleeder type. Converts from siphon to pressure feed; internal to external mix. Black epoxy finish. Aluminum.

CUP: Aluminum, 1-quart. Screw-on cup.

ORDERING INFORMATION: See Warranty above.

Shipping weight 3 pounds 1 ounce.
30 GT 15712 \$32.99

(4 thru 7) Versatile Air Brushes for the pro or the hobbyist



Use air brushes for automobile striping, graphics, touch-ups, ceramic and plaster crafts; painting model planes, trains, ships. Great for decoupage and stenciling. Spray enamels, paint, lacquers, dopes. Operate on 15 to 50 PSI pressure; normal operating pressures 30 PSI.

(4) Pro-style Air Brush Set

Excellent for fine detailing, delicate touch-ups. **SPRAY CONTROL:** Double action. Internal mix for thorough paint atomization. Double-action permits control of spray with fingertip. Adjust spray pattern from 1/16 to 1 1/4 inches. Adjusting-screw sets and maintains pattern.

COMPONENTS: Double-action air brush, two paint tips. One tip for fine detailing, one for heavy-viscosity materials for faster spray and heavier coverage. 8-foot heavy-duty braided hose. 1/4-inch NPT adapter for connection to compressor. One 2-ounce paint jar, two 3/4-ounce jars. Operates off any regulated air supply. Instructions.

ORDERING INFORMATION: 30 GT 15506—Shpg. wt. 2 lbs. Set \$69.99

(5) Hobby Air Brush Set

SPRAY CONTROL: Internal mix for thorough paint atomization. Change spray pattern by turning screw. Spray pattern adjusts from 1/4 to 1 1/4 inches. **COMPONENTS:** Single-action air brush. 8-foot vinyl hose. 1/4-inch NPT adapter for connection to compressor. On-off air valve for use with propellant sold below. Four 3/4-ounce jars. Instructions.

ORDERING INFORMATION: 30 GT 15504—Shpg. wt. 2 lbs. Set \$29.99

(6) Mini-Spray Gun Set

For large overall coverage and touch-ups. **SPRAY CONTROL:** External mix. Turn spray tip to adjust pattern. Pattern adjusts from 1/4 to 2 inches. **COMPONENTS:** Single-action air brush. 8-foot vinyl hose. 1/4-inch NPT adapter for connection to compressor. On-off air valve for use with propellant sold below. One 4-ounce jar. Instructions.

ORDERING INFORMATION: 30 GT 15502—Shpg. wt. 2 lbs. Set \$8.99

(7) Propellant Can Pack

For use with air brushes (5) and (6) above. **ORDERING INFO:** Pkg. of two 11-oz. cans. 30 GT 15509—Wt. 2 lbs. 8 oz. Pkg. \$5.99



\$69⁹⁹



\$29⁹⁹



\$8⁹⁹



88 Sears COMPACTS LAEJUB 2



**Our finest
CRAFTSMAN®
Compact Electric
Sprayer-Compressor
is powerful enough
to paint fences and
small buildings**

\$109⁹⁹

Hard-to-paint items around the home? This compact sprayer will handle them with ease. Sprays any paint—oils, acrylics, even thinned latex. Handles varnishes, lacquers, moth-proofers, insecticides and other garden liquids. Even runs our small sandblaster sold on page 89.

Full one-year Warranty on Craftsman Paint Sprayer/Air Compressors: If this Craftsman Paint Sprayer/Air Compressor fails to give complete satisfaction within one year from the date of purchase, we will repair it, free of charge. This warranty service is available by returning the Paint Sprayer/Air Compressor to any Sears store or Service Center in the U.S.

DELIVERY RATE: Delivers 3.2 SCFM* at 35 PSI** . . . 50 PSI maximum.

COMPRESSOR, MOTOR: Oilless-piston 1-cyl. compressor; 1/2-HP elec. motor.

SPRAY GUN: Bleeder-type gun converts from internal to external mix, pressure to siphon feed. Fluid control. One-quart cup. For big spray jobs, order paint tank from page 89.

DIMENSIONS: 16x9 3/4 x 11 inches high.

ACCESSORIES: With 15 feet of 1/4-inch rubber and rayon air hose, how-to-power spray booklet.

ELECTRICAL INFORMATION: With 6-foot, 3-wire cord. 110-120-volts, 750 watts at maximum pressure, 8.8 amps., 60-Hertz AC. UL listed.

ORDERING INFORMATION: 30 GT 15122L—Shipping weight 40 pounds \$109.99



Inflator Kit. Use with any Sears compressor to inflate tires, air mattresses. Kit includes inflator needle, inflator and air duster, all-purpose inflator, tire inflator, adapter.

ORDERING INFORMATION: 30 GT 16276—Shpg. wt. 1 oz. . . . Kit \$2.69

Viscosimeter. Use to measure thickness of paint. Tells you when to thin for spraying. Plastic.

ORDERING INFORMATION: 30 GT 16393—Shipping weight 2 oz. \$2.19

These Compressor Accessories can help you realize the full potential of your compressor



Sand Blasters for heavy-duty, efficient cleaning with ordinary sand

Remove paint, dirt, rust and scale from castings, stone, ceramic, brick, concrete, metal, plastic and wood. Can be used to etch plastic, glass, metal, stone. Sprays ordinary sand.

(1) Gun and Portable 100-pound capacity Sand Hopper mounted on 6-inch diameter wheels.

PRESSURE REQUIREMENTS: For use with compressors of 1-HP or greater.

SPRAY CONTROL: Non-bleeder type, with siphon feed.

COMPONENTS: Galvanized hopper 21x12-inch diameter, 15-foot materials hose, 3/32-inch air jet, ceramic nozzle, instructions.

ORDERING INFORMATION: 30 GT 16814C—Shpg. wt. 18 lbs. . . \$62.99

(2) Gun and 50-pound Sand Hopper

PRESSURE REQUIREMENTS: For use with compressors of 1-HP or greater.

SPRAY CONTROL: Non-bleeder type, with siphon feed.

COMPONENTS: Polypropylene hopper 17x9 in. diameter, 15-ft. materials hose, 3/32-in. air jet, ceramic nozzle, operating instructions.

ORDERING INFORMATION: 30 GT 16813C—Wt. 6 lbs. 10 oz. . . \$49.99

Ceramic Replacement Nozzle. 3/16-in. orifice. For sand blasters (1) and (2).

ORDERING INFORMATION: 30 GT 16815—Shipping wt. 2 oz. . . \$7.99

(3) Gun and one-quart Canister

Does similar jobs to unit above, using lower-horsepower compressors.

PRESSURE REQUIREMENTS: For use with compressors 1/4-HP or greater.

SPRAY CONTROL: Bleeder-type; pressure feed. Converts to non-bleeder, siphon feed.

COMPONENTS: One-quart canister, 3/64-in. air jet, 3/64-in. steel nozzle, operating instr.

ORDERING INFORMATION: 30 GT 16801—Wt. 1 lb. 12 oz. . . . \$29.99

Replace Nozzles: 3/64-inch orifice. For (3).

ORDERING INFORMATION: Ceramic. Wt. 2 oz. Steel. Wt. 3 oz. 30GT16805 \$6.99 30GT16825 \$2.99

(4) Using a Paint Tank means fewer messy cup refills

CAPACITY: Fill with up to 3 gallons of liquid paint, or a 1-gallon can may be inserted.

CONSTRUCTION: Corrosion-fighting galvanized steel.

DETAILS: Pressure feed. Operates on maximum of 60 PSI*.

DIMENSIONS: Measures 9 3/4 x 9 3/4 x 21 1/2 inches high.

ACCESSORIES: Includes pressure regulator and safety valve.

ORDERING INFORMATION: Cannot be sold in Arkansas, New Jersey or Oregon in compliance with state laws.

30 GT 16105C—Shipping weight 26 lbs. . \$57.99

Disposable Paint Tank Liners

Ends the need for messy paint tank cleanup. Fit paint tank above. Pkg. of 6 liners.

ORDERING INFORMATION: 30 GT 16107—Shipping weight 8 oz. Pkg. \$2.99

(5) Air-powered Caulk Gun

Great for insulation work on door and window frames; grouting tiles; dispensing adhesives and crack fillers. Delivers a uniform bead.

CAPACITY: Insert standard 11-ounce cartridge. Order caulk cartridge from Big Book.

CONSTRUCTION: 9x9-inch plastic body and pistol grip. 1/4-inch metal air hose connection.

DETAILS: Converts from bleeder to non-bleeder. Operates on 20 PSI* . . . 70 PSI max. working pressure. Use with minimum 1/10-HP compressor.

ORDERING INFORMATION: 30 GT 16306—Shpg. wt. 1 lb. 14 oz. . . . \$13.99

*PSI-Pounds per Square Inch

Heavy-duty Ladders with non-conductive fiber glass rails

• Insulated rails meet ANSI† and OSHA‡ requirements

• Resistant to impact and rust

(6) Extension Ladders

Low as **\$96.99** 16-foot

CLASSIFICATION: Heavy duty (250-pound duty rating). Head 1000 pounds in actual tests. **RUNGS, SIDE RAILS:** 1 1/2-inch flat aluminum rungs, forged into rugged 1 1/2 x 3 1/4-inch non-conductive fiber glass side rails. Rungs begin 9 inches from bottom. Top of front rails capped. 18 3/4-inches wide.

ENDS: Durable Lexan® plastic top caps. 7 1/4-inch wide anti-slip feet.

EXTENSION MECHANISM: Heavy-duty nylon-coated double-size automatic locks. Both sections have a full set of rungs. Non-rotting polypropylene rope.

SIZES AND ORDERING INFO: See Shpg. Note below. Order ladders from chart below.

Total length (2 sections)	Max. Ext. Length	Catalog Number	Wt. lbs.	Price
16 feet	13 feet	F30 GT 41632N	39	\$96.99
20 feet	17 feet	F30 GT 41634N	42	119.99
24 feet	21 feet	F30 GT 41635N	54	139.99
28 feet	25 feet	F30 GT 41636N	62	159.99
32 feet	29 feet	F30 GT 41637N	68	193.99

†ANSI—American National Standards Institute

‡OSHA—Occupational Safety and Health Act

(7) Stepladders

Low as **\$41.99** 4-foot

CLASSIFICATION: Heavy duty (250-pound duty rating). Held 1000 pounds in actual tests. **STEPS, SIDE RAILS:** Grooved 3-inch steps riveted to 1 1/2 x 3 1/4-inch non-conductive fiber glass side rails. Two rigid braces on 5, 6 and 8-foot sizes; six braces on 10-foot size. Three horizontal bars on 5-foot size; four bars on 6 and 8-foot sizes; five bars on 10-foot size. Anti-slip feet.

TOP PLATE: Rimmed 6 1/2 x 13 1/2-inch wide.

SIZES AND ORDERING INFO: See Shpg. Note below. Order ladders from chart below.

Sizes	Bottom width	Spread inches	Catalog Number	Shpg. wt.	Price
4-ft.	19 in.	30	F30 GT 41124N	16 lbs.	\$41.99
6-ft.	22 in.	42	F30 GT 41126N	23 lbs.	59.99
8-ft.	25 in.	54	F30 GT 41128N	32 lbs.	79.99
10-ft.	28 in.	66	F30 GT 41121N	41 lbs.	98.99

Shpg. Note for both pages: "F" items (as F30 GT 41124N) from Louisville, Ky., Kansas City, Atlanta, or Fairless Hills, PA. Pay motor carrier charges from factory. Allow time. No C.O.D.'s.

(8) Portable Steel Air Tanks let you take pressurized air right to the job

Low as **\$24.99** 3 1/2-gallon

3 1/2-gallon capacity. Great for inflating air mattresses, toys, etc.

WORKING PRESSURE: 150 PSI* Recommended operating pressure 85-125 PSI.

DIMENSIONS: 8 3/4 x 10 1/2 x 18 inches long.

ACCESSORIES: Pressure regulator, air chuck, 4-ft. 1/4-in. hose, handle, stand.

ORDERING INFORMATION: Cannot be sold in Arkansas, New Jersey or Oregon in compliance with state laws.

30 GT 16125C—Shipping weight 16 pounds \$24.99

9-gallon capacity. Enough air to inflate several tires.

WORKING PRESSURE: 150 PSI*. Recommended operating pressure 85-125 PSI.

DIMENSIONS: 12 1/2 x 14 1/2 x 22 1/2 inches long.

ACCESSORIES: Pressure regulator, air chuck, 4-ft. 1/4-in. hose, handle, stand.

ORDERING INFORMATION: Cannot be sold in Arkansas, New Jersey or Oregon in compliance with state laws.

30 GT 16124C—Shipping weight 29 pounds \$32.99

(9) Protective Mask

Keeps out paint, dust. Non-toxic. With disposable filter.

ORDERING INFORMATION:

30 GT 16351—Shipping weight 2 ounces \$2.29

Extra Filters for mask above. Package of 2.

ORDERING INFORMATION:

30 GT 16361—Shpg. wt. 1 oz. Pkg. 79c

OUR FINEST ALUMINUM EXTENSION LADDERS

Like all of our finest-quality hardware items, they had to earn the right to wear the name

CRAFTSMAN

Here's what makes these ladders so outstanding:

This ladder is built for recommended loads of 250 pounds

Rugged, double-wall 1½ inch rung for lasting dependability

Computer-designed "Z"-shaped side rails for strength, rigidity

This ladder is built for recommended loads of 300 pounds

3-inch wide step. There's none wider in the industry!

Sturdy, 3½x1½-inch "I"-beam side rails for strength

And since they're built so strong, we back them both with our famous Full Unlimited Warranty

- Flat 1½-inch wide rungs
- 2 large grooved top rollers

Low as **\$5926** 16-ft.

- Extra-wide 3-inch steps
- 4 large grooved top rollers

Low as **\$8699** 16-ft.

CLASSIFICATION: Heavy Duty. (250-pound duty rating.) Held 1000 pounds in actual tests.
RUNGS, SIDE RAILS: 1½-in. flat rungs, supported by internal "I" beams, and collar-forged under pressure to "Z"-shaped 1x3-in. wide side rails. Rungs begin 6 inches from bottom for added strength. Tops of front rails capped for added protection. Broad, 18½-in. wide top and bottom sections for stability.
ENDS: Extra-large 2¾-inch diameter grooved top rollers minimize slippage. Swivel-style 5-inch rubber-treaded feet with ice cleats plus holes for spiking to ground.
EXTENSION MECHANISM: Automatic locks on rear section. Non-rot polypropylene rope. Pulley.
SIZES, ORDER INFO: See Warranty below, right. See How To Order below. Order from chart below. See "N" suffix, page 92.

Catalog Number	Size Total length (2 sections)	Maximum extended length	Wt. lbs.	Price
30 GT 42902N	16 feet	13 feet	34	\$59.26
30 GT 42904N	20 feet	17 feet	39	79.69
30 GT 42905N	24 feet	21 feet	45	99.89
30 GT 42906N	28 feet	25 feet	56	120.76
30 GT 42907N	32 feet	29 feet	63	143.94
30 GT 42908N	36 feet	33 feet	69	166.76
30 GT 42909N	40 feet	36 feet	84	189.76

HOW TO ORDER EXTENSION LADDER

Extension Ladders have a minimum usable height that can safely be reached. For reaching lesser heights, order supplementary ladders suggested below.

Max. height to reach	Ladder size needed	Min. usable height	Supplementary Ladder needed
up to 9 ft.	16 foot	5 feet	Extension 4-in-1 Stepladder
10 to 13 ft.	20 foot	7 feet	
14 to 17 ft.	24 foot	9 feet	
18 to 21 ft.	28 foot	11 feet	
22 to 25 ft.	32 foot	13 feet	
26 to 28 ft.	36 foot	15 feet	
29 to 32 ft.	40 foot	17 feet	

CLASSIFICATION: Heavy duty (300-pound duty rating). Held 1200 pounds in actual tests.
RUNGS, SIDE RAILS: 3-inch comfort steps, securely riveted to extra-husky 3½x1½-inch side rails. Side rails of "I"-beam construction for added rigidity. Rungs begin 6 inches from bottom for added strength. Tops of front rails capped for added protection. Top and bottom sections 19 inches wide for broad-stanced stability. Top and bottom braced.

ENDS: Four large 1¾-inch diameter top rollers help minimize slippage and side-sway. Broad 6-inch metal traction feet with spike holes.

EXTENSION MECHANISM: Oversize automatic locks on rear section. Non-rot polypropylene rope, pulley.

SIZES AND ORDERING INFORMATION: See Warranty below. See How to Order, below left. Order from chart below. "T" items (as T30 HT 42972N) sent from Chicago, Philadelphia, Atlanta, Dallas or Los Angeles. Customers served by other distribution centers should allow extra delivery time. Pay motor carrier charges from your Catalog Distribution Ctr.

Catalog Number	Size Total Length (2 sections)	Maximum Extended Length	Shpg. wt. lbs.	Price
T30 GT 42972N	16 feet	13 feet	33	\$86.99
T30 GT 42974N	20 feet	17 feet	41	121.99
T30 GT 42975N	24 feet	21 feet	49	140.99
T30 GT 42976N	28 feet	25 feet	64	181.99
T30 GT 42977N	32 feet	29 feet	72	212.99
T30 GT 42978N	36 feet	33 feet	88	248.99
T30 GT 42979N	40 feet	36 feet	98	279.99

Full Unlimited Warranty on CRAFTSMAN Ladders: If ladder should fail to give complete satisfaction, simply contact us and we will, without charge to you, furnish new parts, replace the ladder or refund the purchase price at your option.

Low as **\$7999**

Rolling Warehouse Ladders meet OSHA** requirements

Tapered, flared legs create load-centered pyramid shape for maximum stability. 3, 5-step models roll smoothly to job on spring-loaded casters. Step on ladder, casters retract, slip-resistant feet hold ladder in place. 6 to 10-step models anchor in place with locking device.

CLASSIFICATION: Heavy duty (250-pound duty rating). Held 1000 pounds in actual tests.

STEPS, FRAME: Completely-formed 16-gauge steel steps, welded to ¾-inch diameter steel frame for strength. "Sure-grip" step tread design for slip resistance. Side rails extend 30 inches above top platform for protection. Steps measure 10 inches deep; top platform measures 10 inches deep. Painted rust-resistant finish.
SIZES, ORDER INFORMATION: Partly assembled. See Shipping Note on page 89.

Catalog Number	Platform height	No. of steps	Step width	Shipping weight	Price
F30 GT 42493N	28 in.	3	16 in.	42 lbs.	\$79.99
F30 GT 42494N	38 in.	4	16 in.	50 lbs.	98.99
F30 GT 42495N	47 in.	5	24 in.	70 lbs.	128.99
F30 GT 42496N	57 in.	6	24 in.	85 lbs.	155.99
F30 GT 42497N	66 in.	7	24 in.	99 lbs.	182.99
F30 GT 42498N	76 in.	8	24 in.	107 lbs.	199.99
F30 GT 42491N	95 in.	10	24 in.	138 lbs.	251.99

**OSHA=Occupational Safety and Health Act

(1) Ladder Stabilizer. Sturdy rectangular-shaped aluminum frame increases ladder stability. Arm spread of 48 inches spans windows and other obstructions; holds ladder 10 inches away from wall on protective rubber bumpers. Can also be rested on roof of house, so there's no need to lean ladder against rain gutters. Attaches quickly, without tools. With 18x7x3½-inch deep portable tool and brush tray. Handy paint can hook.


ORDERING INFORMATION: Fits all extension ladders.
30 GT 43462C—Shpg. wt. 10 lbs. \$13.76

(2) Ladder Jacks. Use with plank below. Fit any size extension ladder, to put the load on side rails. Not for light-duty ladders.

ORDERING INFORMATION: Package of 2.
30 GT 43091C—Shpg. wt. 26 lbs. \$19.99

(3) Extension Plank. Extends from 6 to 10 ft. Use between ladders. 1½x12-inches wide. For 1 person.

ORDERING INFORMATION: See "N" suffix, note on page 92.
30 GT 43056N—Shpg. wt. 27 lbs. \$31.99



Sears "EARLY ONE" Fire Alarms can detect fire in your home even in the initial stage... before smoke or flames appear..

Senses particles of combustion in these 3 stages:

Initial Stage:
Particles of combustion not visible in this stage

Smoke Stage:
Products of combustion are visible—such as smoke

Flame Stage:
Advanced products of combustion that can be spread fast

(1 and 2) Dual-chamber design for stable performance... new at Sears!

Two chambers give you more accurate sensitivity—one chamber is a reference mechanism for the operating chamber. It is independent of changing atmospheric conditions, thus compensating for any rapid changes such as temperature, altitude, humidity. And like all our "Early Ones", these new alarms are subjected to actual particles of combustion under test conditions at the factory. Each one must sound the alarm or it isn't shipped. This test, others help make sure once you install the "Early One" in your home, it's ready.

(1) "Early One" with dual-ionization chamber. For higher sensitivity and stability for fewer false alarms, more accurate detection.

CONSTRUCTION: Dependable solid-state circuitry with Circuit Supervisory Test Button—not only checks battery or horn, but total unit circuitry.

INSTALLATION INFO: Mounts with just 2 screws—no special tools required.

TEST PROCEDURE: Direct smoke at unit or hold match 2 ft. under it... warning stops when concentration of particles of combustion is no longer sufficient to trigger alarm.

BATTERY: New electronic breakthrough. For the first time at Sears, get the same 1 year service that our \$5 mercury battery gives you, with a \$1.49 9-v. alkaline battery.

ORDERING INFORMATION: Battery included. Order replacements below.

9 GT 57045—Shpg. wt. 1 lb. \$37.88

Like (1) above, but with walnut-look color housing with dark burl-center accent.

9 GT 57041—Shipping weight 1 pound 37.88

(2) "Early One" with thermal circuit. Like (1) above, but includes thermal detector. Built-in 135 thermal detector sounds the alarm when room temp. reaches 135° F. Provides both smoke and temperature protection.

ORDERING INFORMATION:

9 GT 57046—Shipping weight 1 pound \$43.88

9-v. Alkaline Replacement Battery for all "Early Ones" on this page.

ORDERING INFORMATION: For 9 GT 57045-41-46 only. Not rechargeable.

9 GT 57017—Shipping weight 9 ounces \$1.25


With test button
\$37.88

With test button and thermal circuit
\$43.88

Where to install your Early Ones

Your house or apartment is probably designed so that you need more than one "Early One" for adequate protection.

Locate an "Early One" in every bedroom area. The location should allow the alarm to awaken all sleeping persons through closed doors. Locate an "Early One" at the tops of stairways where smoke or particles of combustion can pass the quickest and block the exit path. Also locate the "Early One" in frequently used living areas such as the family room, living room, recreation room, and workshop areas in basement where power tools are used, and flammable materials might be stored. You may need additional "Early Ones" in those rooms where there is frequent smoking or use of electrical appliances. To avoid false alarms, do not mount detectors in the kitchen, garage, etc. where food preparation or auto exhaust fumes are present.

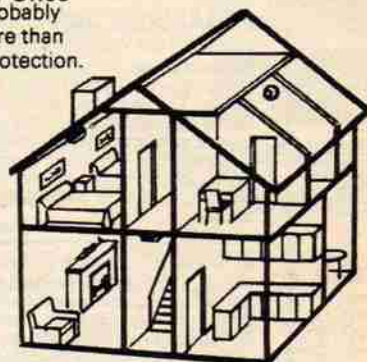

"How-to" Books

Do it yourself home projects and repairs are simplified

Save 10%
when you buy any 5 or more books

Choose from 29 different "How-to" paperback books on various do-it-yourself projects. Cover general woodworking, home remodeling, plumbing, electrical repairs, masonry, automotive repairs. All books give simplified step-by-step instructions with black and white illustrations.

ORDERING INFORMATION:


General Woodworking and Building Books. State catalog number and book number.

Catalog Number	Book No.	Title	Pages per book	Shpg. Wt.	Price	When you buy any 5 or more
9 GT 2904H	669	How to Build Birdhouses and Bird Feeders.....	66	6 oz.	\$2.00	Each \$1.80
	690	How to Build Bars.....	114	6 oz.	2.00	Each 1.80
	672	How to Build Workbenches and Sawhorse Tool Chest.....	98	6 oz.	2.00	Each 1.80
	677	How to Plan and Build a Home Workshop, Trainboard Storage, Swedish Door Chimes, Radiator Enclosures.....	98	6 oz.	2.00	Each 1.80
	664	How to Build Bookcases.....	98	6 oz.	2.00	Each 1.80
9 GT 2915H	630	How to Build Sportsmen's Cabinets and Racks.....	98	6 oz.	2.00	Each 1.80
	756	Scroll Saw Projects.....	130	10 oz.	2.50	Each 2.25
	612	How to Build Wall-to-Wall Stereo Cabinets.....	130	10 oz.	2.50	Each 2.25
9 GT 2905H	607	How to Build Fences, Gates, Outdoor Projects.....	162	10 oz.	2.50	Each 2.25
	761	How to Build Colonial Furniture.....	258	7 oz.	3.50	Each 3.15

Home Remodeling and Repair Books. State catalog number and book number.

Catalog Number	Book No.	Title	Pages per book	Shpg. Wt.	Price	When you buy any 5 or more
9 GT 2904H	623	How to Repair, Refinish and Reupholster Furniture, Caning Simplified.....	98	6 oz.	\$2.00	Each \$1.80
	605	How to Apply Paneling.....	82	6 oz.	2.00	Each 1.80
	696	Roofing Repairs and Application Simplified.....	98	6 oz.	2.00	Each 1.80
	663	How to Build a Two Car Garage.....	66	6 oz.	2.00	Each 1.80
	658	How to Build Kitchen Cabinets, Room Dividers and Cabinet Furniture.....	98	6 oz.	2.00	Each 1.80
	631	How to Build Patios and Sundecks.....	98	6 oz.	2.00	Each 1.80
	694	Easi-Build Simplified Electrical Repairs.....	98	6 oz.	2.00	Each 1.80
9 GT 2915H	608	How to Modernize a Kitchen.....	82	6 oz.	2.00	Each 1.80
	606	How to Lay Ceramic Tile.....	96	6 oz.	2.00	Each 1.80
	617	Concrete Work Simplified.....	128	6 oz.	2.50	Each 2.25
	697	Forms, Footings, Foundations and Framing.....	162	10 oz.	2.50	Each 2.25
	675	Plumbing Repairs Simplified.....	162	10 oz.	2.50	Each 2.25
9 GT 2905H	668	Bricklaying Simplified.....	146	10 oz.	2.50	Each 2.25
	611	How to Build a Walk-in and Window Greenhouse, Electric Light Gardening Simplified.....	114	10 oz.	2.50	Each 2.25
	632	How to Build a Vacation or Retirement House.....	194	10 oz.	3.50	Each 3.15
	674	How to Install a Fireplace.....	242	7 oz.	3.50	Each 3.15
9 GT 2918	685	How to Rehabilitate Abandoned Buildings.....	258	7 oz.	3.50	Each 3.15
9 GT 2917		Craftsman Table Saw, Power Tool Know How.....	207	14 oz.	4.99	Each 4.49
		Craftsman Radial Saw, Power Tool Know How.....	224	15 oz.	4.99	Each 4.49

Almost everything you need to know about Home Improvement... in one volume



\$15.99

You can save time and labor costs with do-it-yourself home improvement projects such as...

- How to shop for tools and material and save money
- How to strip off old wall paper and put on the new
- How to reshingle a roof and replace individual shingles
- How to choose between oil-base and rubber-base paints
- How to mix and apply plaster
- How to find alternate methods of doing a job
- How to arrange financing for major home improvements
- How to find room for another bathroom

CONTENTS: This 600 page book has 2255 how-to photos and illustrations that can help you help yourself with household repairs and projects indoors and out. Everything from electricity to household pests... from woodworking to masonry. Find out about projects around the home you can do without calling in a professional... kitchen improvements, build furnishings for living areas, bedroom projects, children's toys and furniture, even backyard barbecues and patios. Gives you hundreds of quick answers to common household problems. Even special action pages to help handle emergencies.

ORDERING INFORMATION:

9 GT 2939—Shipping weight 4 lbs. 13 oz. ... \$15.99

There are four easy ways to order from this Catalog

1

Shop By Phone—You'll be pleased at the ease and convenience of ordering from Sears Catalog by telephone. So call today—it's the easiest way to shop. Phone your Easy Payment and Sears Revolving Charge Account orders, too.

Have your order delivered directly to your home or pick it up at your nearest Sears Catalog Selling Unit.

2

Shop at Home by Mail—No matter where you live, Sears is always prepared to offer prompt and efficient service. Just list all the items on a Sears order blank or any plain piece of paper. Print plainly your full name and mailing address. Be sure to include all catalog numbers, descriptions of wanted items and any special information requested.

3

Catalog Sales Office or Sears Authorized Catalog Sales Merchant—It's so easy to order through your nearest Sears Catalog Selling Unit. A copy of all current Sears catalogs are available in each office for your reference. In addition, a complete supply of FREE Specialized Catalogs are also available for the asking.

4

Retail Store Catalog Sales Department—Friendly sales people are always willing to help you when you shop in person or by phone. Each Sears Retail Store has a Catalog Sales Department where trained sales people will help you make a selection and write your order. Many units have samples of merchandise on display.

CREDIT TERMS—See Sears Big Book or any Sears Retail Store or Catalog Selling Unit for information on Sears Credit Plans

HELPFUL INFORMATION ABOUT YOUR SEARS CATALOG ORDER

REGARDING OUR CATALOG PRICES

Following the policy in effect since our founding in 1886, prices quoted in Sears catalogs do not include (unless stated otherwise) charges for handling and shipping of goods from our Merchandise Distribution Center to a Sears catalog selling unit for pick-up, or for delivery to your home. The shipping and handling charges may differ depending on method of shipping. Information on shipping and handling charges for shipping by parcel post or truck can be obtained from the yellow customer information pages of our Big Book. Specific details on charges for handling and shipping to a Sears catalog selling unit for pick-up can be obtained from the unit, either at the counter or over the phone.

Duration of prices for items listed only in this Specialized Catalog is established by the expiration date shown on the front cover. Duration of prices for items listed in Specialized Catalogs and also in General Catalogs is established by the General Catalogs' "price-effective" dates, or by the individual expiration date of each Specialized Catalog, whichever is later.

Although it is our intention to maintain prices printed in this 1976-77 Power and Hand Tool Catalog until our next Power and Hand Tool Catalog is issued, special rare circumstances beyond our control may make it necessary to reduce or to increase the prices listed before a new catalog quoting the price change can be issued. For example, should the Federal, State or Local Government increase or impose additional taxes after this book goes to press, we reserve the right to add such taxes to the prices shown. Also, should unusual market conditions result in sharp fluctuations in prices after this catalog goes to press, we reserve the right to revise our prices accordingly; in such a case, we will notify you of the price change prior to processing your order.

On the other hand, if any of the existing taxes are reduced while this catalog is in effect, we shall adjust our prices accordingly. Further, when any item you order is being offered at a lower price in another Sears catalog current with the book you are using, your order will be filled at the lower price.

Prices in this catalog apply only to orders placed by mail, telephone, telegraph or placed in person at a Sears Catalog Sales Office, Authorized Catalog Sales Merchant or at a Catalog Sales Department in a Retail Store, Retail Catalog and Appliance Store or in a Sears Affiliated Store.

IMPORTANT TAX NOTICE

We are required by law to collect tax on sales at rate shown

*Alabama.....4%	Kansas.....3%	*New York.....4%
Arizona.....4%	Kentucky.....5%	*North Carolina.....3%
Holbrook, Phoenix and Scottsdale.....5%	*Louisiana.....3%	North Dakota.....4%
Arkansas.....3%	Maine.....5%	*Ohio.....4%
California.....6%	Maryland.....4%	Oklahoma.....2%
If your Rapid-Transit District has a tax, 6½%	Massachusetts (omit tax on food and articles of clothing to \$175).....5%	Pennsylvania.....6%
Colorado.....3%	Michigan.....4%	Rhode Island.....5%
Connecticut.....7%	*Minnesota.....4%	South Carolina.....4%
Distr. of Columbia.....5%	Mississippi.....5%	*South Dakota.....4%
Florida.....4%	Missouri.....3%	*Tennessee.....3½%
*Georgia.....3%	Except Kansas City customers.....4%	Texas (4% State, 1% City).....5%
Hawaii.....4%	*Nebraska.....2½%	*Utah.....4¼%
Idaho.....3%	*Nevada.....3%	Vermont.....3%
Illinois (4% State, 1% City).....5%	New Jersey.....5%	Virginia.....4%
Indiana.....4%	New Mexico.....4%	Washington.....5.3%
Iowa.....3%		West Virginia.....3%
		Wisconsin.....4%
		Wyoming.....3%

*If your city, county or parish has a tax, include the additional tax required

SHIPPING INFORMATION

"N", "N2", "NH" suffix (such as 9-1234N) means that this item, if shipped directly to your home, is sent by motor carrier. (See non-Sears truck information pages in our Big Book.) If you prefer, pickup your order at a Sears Catalog Selling Unit. . . ask about pickup charges. Home delivery through a Sears unit may also be available, please inquire.

Parts of your order may be shipped from points other than your distribution center and may therefore arrive separately at different times.

C.O.D. ORDERS

C.O.D. orders are accepted only for merchandise sent from a Catalog Merchandise Distribution Center to a Sears Unit. You may then pick up your order or arrange with your Sears unit for redelivery to your home (if available).

If you request that your order be sent directly to you via Parcel Post or Freight, you must include a money order, check or use your Sears Credit Account.

Nor do we ship C.O.D. orders for merchandise cut, engraved, printed or made to order, for merchandise shipped direct from factory or shipped to foreign countries or to anyone other than the person sending the order.

PARCEL POST INFORMATION

Packages weighing up to 70 pounds and measuring not more than 100 inches in length and girth can be sent by parcel post in all parcel post zones, except catalog numbers followed by "L".

"L" items (as 30-2186L) cannot be mailed from a first class post office to a first class post office for city delivery in any parcel post zone. (This does not apply to rural route addresses.) "L" items weighing less than 15 lbs. and measuring over 84 in. up to 100 inches in length and girth combined are chargeable with a minimum rate equal to that for a 15 lb. item.

Your Catalog Merchandise Distribution Center is served by a first class post office. Your Postmaster or carrier can tell you if you are served by a first class post office. Catalog numbers ending with "N", "N2", etc. are unavailable.

SEARS SHIPPING AND HANDLING CHARGES FOR ORDERS SHIPPED BY PARCEL POST

SHIPPING WEIGHT	APPROXIMATE DISTANCE FROM CATALOG MERCHANDISE DISTRIBUTION CENTER							
	Local Zone	Zones 1 and 2 Not over 150 Miles	Zone 3 151 to 300 Miles	Zone 4 301 to 600 Miles	Zone 5 601 to 1000 Miles	Zone 6 1001 to 1400 Miles	Zone 7 1401 to 1800 Miles	Zone 8 Over 1800 Miles
1 oz. to 8 oz.	\$.25	\$.32	\$.32	\$.34	\$.38	\$.41	\$.46	\$.50
9 oz. to 15 oz.	.63	.68	.68	.68	.75	.83	.91	.99
1 lb. to 2 lbs.	.75	.85	.90	1.10	1.20	1.30	1.40	1.50
2 lbs. 1 oz. to 3 lbs.	.80	1.00	1.05	1.20	1.30	1.40	1.60	1.75
3 lbs. 1 oz. to 5 lbs.	.90	1.15	1.25	1.35	1.50	1.75	1.95	2.05
5 lbs. 1 oz. to 10 lbs.	1.10	1.40	1.50	1.75	2.10	2.45	2.85	3.00
10 lbs. 1 oz. to 15 lbs.	1.30	1.80	2.00	2.25	2.85	3.30	3.75	4.20
15 lbs. 1 oz. to 25 lbs.	1.60	2.20	2.50	2.90	3.65	4.50	5.25	6.20
25 lbs. 1 oz. to 40 lbs.	2.10	3.05	3.60	4.25	5.30	6.45	8.10	9.40
40 lbs. 1 oz. to 55 lbs.	2.70	4.15	4.80	5.80	7.25	9.75	11.95	13.90
55 lbs. 1 oz. to 70 lbs.	3.30	5.20	6.40	7.80	9.45	12.05	14.70	17.20

SEARS CATALOG MERCHANDISE DISTRIBUTION CENTERS

ATLANTA, GA 30395	JACKSONVILLE, FL 32297
BOSTON, MA 02215	KANSAS CITY, MO 64127
CHICAGO, IL 60607	LOS ANGELES, CA 90051
COLUMBUS, OH 43228	MEMPHIS, TN 38140
DALLAS, TX 75295	MINNEAPOLIS, MN 55407
GREENSBORO, NC 27480	PHILADELPHIA, PA 19132
SEATTLE, WA 98184	

SEARS GUARANTEE . . Satisfaction Guaranteed or Your Money Back

Whatever you buy at Sears, you have the right to use it for a reasonable time before you determine it is satisfactory and decide to keep it. If you decide it is not satisfactory, return it to us at our expense. We will do whatever is necessary to correct the cause of your dissatisfaction. If we can't satisfactorily provide a remedy, or if you request a refund, we will refund your full purchase price including appropriate delivery and finance charges and applicable taxes.

SEARS PLEDGE OF FAIRNESS

If, after you have decided to keep your purchase, it doesn't give you the service or performance you reasonably expect of it and there isn't a specific warranty on the item that will satisfactorily correct the problem, please let us know. We want to make an adjustment that you will consider fair.

GENERAL INDEX

Abrasives	17, 20, 21, 102	Hack Saws	45	Sender-Polishers	12, 17
Adhesives	20, 23, 49	Hammers, Accessories	24, 31, 49	Sanders	
Air Compressors, Accessories	84-89	Hand Trucks	36	Accessories 11-13, 17, 20, 42, 101, 110, 111, 130	
Air Pumps	87	Hatchets		Saws, Accessories:	
Air Tools, Accessories	40-43, 89	Accessories	24	Back	22
Alarms, Fire	91	Hex Keys	50	Band	102, 103, 129
Alternator	81	Hobby Tools	18, 22, 23, 25, 27, 104	Chain	80
Analizers, Electrical	76	Hoists	39	Circular	8, 9
Aprons, Carpenters' and Handyman	31	Holders, Tool	31, 113	Coping	25
Arc Welders, Accessories	98, 99	Impact Tools, Accessories	40-43, 49	Hack	45
Augers	33	Instruction Books 31, 91, 96, 98, 104, 110, 111, 134		Hand, Electric	7-11
Auto Tools	46-49, 50, 60	Jack Screws	38, 73	Hand, Manual	22, 25
Awls	28	Jigsaws, Blades	27, 130	Jig	27
Axes, Accessories	24	Jointer-Planers, Accessories	112, 124	Keyhole	25
Band Saws	102, 103, 124	Knives	27	Miter	22, 133
Bars	25, 49	Ladders, Accessories	89, 90	Radial	111, 131-133
Batteries, Rechargeable	39	Lamps	78	Reciprocating	7
Bits:		Lanterns	39	Sabre, Scroll	10, 11, 27, 130
Auger	28	Lathes, Turning:		Table	130, 132, 134-136
Cutter	113	Metal, Accessories	104-107	Sawhorses	23
Drill	16, 17, 28	Wood, Accessories	27, 104, 107, 128, 130	Sawhorse Sets, Brackets	25, 119
Impact Driver	49	Levels	30, 94, 95	Scrapers	
Mortising	127	Lighting Fixtures	78, 112, 121	Accessories	28, 31
Router	4, 5	Lubricants	8, 47	Screwdrivers	26
Screwdriver	16, 17, 28	Magnets	45	Scribes	28
Shaper	113, 124, 125	Magnifiers	75	Sewer Rods	33
Blades, Saw		Mandrels	17	Shafts, Accessories	108
Band	102, 103, 129	Mapp Gas Kits and Cylinders	32	Shapers, Accessories	124, 125
Circular	8, 114, 115	Marking Tools	19, 25, 28	Sharpeners	
Coping	25	Masonry Tools	31	Drill bit	17
Dado	110, 113	Material Handling Equipment:		Saw	101
Electric hand	114, 115	Cranes	38	Sharpening Stones	25
Hack	45	Flat Truck	36	Shelving	37
Jig	130	Hand Truck	36	Shop Vacuums, Accessories	116, 117
Pruning	25	Hydraulic Lift	38	Snips	47
Radial	111, 113-115	Steel Conveyors	38	Socket Wrench Sets	60-62
Reciprocating	7	Measuring Tape	30	Sockets, Sets	52-54, 58, 59
Sabre	10, 11	Mechanics' Tool Chests and Cabinets, Accessories	34, 63-65, 67, 69-72	Soldering Guns, Irons, Accessories	77
Table	110, 113-115	Mechanics' Tool Sets	61-69	Speed Converters	128, 129
Body, Fender Tools	49	Medical Care Carts	35	Splitting Wedge	24
Bolt Cutters	47	Meters, Electrical	76	Sprayers, Paint	83-89
Books	91, 96, 98, 110, 111, 134	Metric Tools:		Squares	30, 74
Braces, Accessories	28	Measuring Tapes, Meter Stick	30	Stamping Sets	25
Brake Tools	48	Sockets	52-54, 57-59	Stands, Tool	112, 120-122, 130, 133
Bricklayers' Tools	31	Taps and Dies	44, 45	Staplers, Accessories	29
Buffing Wheels	17	Tool Sets	60, 61, 68, 69	Stools	122
Cabinets	35, 37, 112, 120-123	Torque Wrenches	51	Storage Bins, Shelves, Drawers	37, 119-123
Cabinets, Roller	63-65, 67, 69-72	Wrenches	56, 57	Strippers, Wire	79
Calipers	73, 74	Micrometers	73	Stud Driver, Accessories	25
Carts	35, 36	Milling Accessories	104, 107	Surforming Tools	28
Carving Tools	27	Miter Boxes, Accessories	22, 133	Surveying Instruments	94, 95
Cases, Carrying	21	Molding Cutter Heads	113, 124, 125	Switches, etc.	106
Casters	29, 112, 135, 136	Motors, Accessories	108, 109	Table Saws	110, 130
Cement Tools	31	Nail Gun	29	Taps, Dies, Accessories	44, 45
Chains	38	Nail Sets	25	T-Bovels	30
Chain Saws and Accessories	80	Nippers	46, 47	Terminal Kits	79
Chalk, Chalk Lines	31	Nut Drivers, Sets	26, 55	Thread Cutters	33, 44, 45
Chests, Tool	34, 63-65, 67, 69-72	Oil, Oilers	47	Tool Boxes	34
Chisels	25, 31, 128	Paint Sprayers, Accessories	83-89	Tool Cases	34
Chucks	12, 106	Personal Safety Equipment:		Tool Cabinet Cart	72
Circuit Interrupters	77	Eye Protectors	35	Tool Sets:	
Circular Saws	8, 9	Face Protectors	35	Bicycle	60
Clamps	23, 73, 98	Hearing Protectors	35	Mechanics	61-69
Compasses	38, 46	Respirators, Masks	35, 89	Motorcycle	60
Compressors, Air	84-89	Pick-up Tools	45	Torches, Accessories	96-98
Conveyor	38	Pipe-Threading Tools	33	Tripods	94
Cord Reels	78	Planer-Molders, Accessories	124	Trouble Lights	78
Cord Sets	78	Planers, Accessories	7, 111, 124, 127, 130	Trowels	31
Cranes	38	Planes	28	Tubing Tools	33
Cutter Heads, Molding	113, 124, 125	Plasterers' Tools	31	Twine	31
Dado Blades, Accessories	110, 113	Pliers, Accessories	46-49	Vacuum Cleaners, Accessories	116, 117
Decorators' Supplies	31	Plumbers' Tools, Accessories	32, 33	V-Blocks	73
Dial Indicators, Accessories	75	Pneumatic Tools	40-43	Vises	23, 79, 111, 118, 119, 127
Dies, Accessories	33	Polishers, Accessories	12, 17	Wedges	24
Dividers	74	Pouches, Tools	31	Welders, Arc, Accessories	98, 99
Dollies	36	Power Outlet Strips	77	Welders Oxy-Acetylene, Solid-Ox, Mapp	
Dovetailing Attachments	5, 127	Power Plants	81	Accessories	96, 97
Drain Cleaning Tools	33	Power Sprayers	83-89	Welders' Personal Protectors	35
Drill Accessories	12, 15-18	Precision Tools	73-75	Whetstone	25
Drill Presses, Accessories	18, 126, 127, 130	Propane Torches, Accessories	32	Winches	39
Drills:		Protractors	30, 75	Wiring Supplies	76-79
Electric	12, 14, 15, 17	Pruning Saw, Blades	25	Wire Brushes	17
Hand	28	Pullers	48, 49	Wire Strippers	79
Dry-wall Tools	31	Pulleys	109	Wood Turning Lathe, Access	128, 130
Dust Collectors	116, 117	Pumps, Air	87	Work Bench	23, 119-123, 130
Electrical Outlets	76	Punches	28	Work Centers	119-123
Electric Testers	76	Radial Saws	111, 131-133	Work Lights	78
Electricians' Tools	46, 79	Ratchet Wrenches, Accessories	43, 50, 51, 54, 56	Wrecking Bars	25
Engraving Tools	19	Reamers	48	Wrenches, Accessories:	
Extension Cords	78	Reciprocating Saws	7	Adjustable	55
Face Shields	35	Rechargeable Batteries	39	Air	40-41, 43
Files, Accessories	45, 49, 55	Reels, Cord	78	Combination	55-57
Fire Alarms	91	Respirators	35	Cross Rim	48
Fire Extinguishers	121	Rethreading Tools	33, 44, 45	Box-End	55-57
Flaring Tools	33	Rivet Tools, Accessories	29	Distributor	48
Fluorescent Lighting	78	Rotary Grinders	19, 27	Hex Keys	50
Gauges	30, 31, 48, 73-75, 85	Routers, Accessories	3-6	Ignition	55
Gear Pullers	48	Rules	75	Metric	22, 51, 56
Generator Engines	81	Sabre Saws	10, 11	Open End	55-57
Glass Cutters	28	Safety Equipment	see Personal Safety Equipment	Pipe	32
Glue Guns, Glues	23	Sandblasters	89	Ratchet	43, 50, 56
Goggles	35			Setscrew	50
Grinders, Accessories	19, 21, 42, 100, 101			Socket	16, 24, 55, 57
Ground-Fault Interrupters	77			Spark Plug	53
				Tap	33, 44, 45
				Torque	51

Site a fence, level a floor, align structural steel, do building job after

Here are just ten reasons why the levels of these two pages give you sharp, clear, right-side-up images for fast accurate readings on job site after job site



① Achromatic lenses, precision ground, polished to exact curves for clarity



② Rack-and-pinion focusing for accurate line of sight through-out the range



③ Telescopes precision bored to rifle-barrel accuracy, dust proof fittings



④ Fitted carrying case, polyethylene foam insert helps protect level from damage



⑤ Fine motion parts, precision machined to avoid backlash, side play

(A) Our most popular Tilting Transit Level

Level alone **\$174.95**



Features plate level with vial sensitivity of 12 to 14 minutes per 2 millimeter division for more accurate reading

RANGE: 18 power telescope for work under 100-ft., 26 mm fixed lens focuses 4½ ft. to infinity. **PLATE, SCOPE VIALS:** Positive vial mountings. Constant control is maintained even when telescope is in transit position. Plate vial has sensitivity of 12-14 minutes per 2 millimeter division. Horizontal circle divided to single degrees in quadrants. Double disc-type vernier reads to 15 minutes (¼°). Radius vertical arc reads to single degrees with index. Dust protected micrometer-clamp, tangent screws. Scope vial has sensitivity of 7-8 minutes per 2 millimeter division.

TELESCOPE CONSTRUCTION: Brass, aluminum, plastic and glass. Achromatic lenses. Precision-machined fine motion parts. Rack-and-pinion focusing. Dust-protected eye-piece has cross hairs in fixed focus. Built-in sunshade, 4 dust-protected leveling screws with easy-to-handle knobs, shifting center over a point. Strong, push-pull leveling lock converts instrument from a transit to a level.

ACCESSORIES INCLUDED: Fitted carrying case, plumb bob and instruction manual.

ORDERING INFORMATION: See warranty and service information on page 95.

Level alone.
9 GT 46202C—Shipping weight 7 pounds \$174.95

Level above with stiff legged tripod (9 GT 46081C) described below.
9 GT 46214C2—Shipping weight 19 pounds 199.95

Level above with extension-leg tripod (9 GT 46082C) described below.
9 GT 46241C2—Shipping weight 21 pounds 214.95



(B) Tilting Transit Level

Level alone **\$149.95**

RANGE: 16-power, for work under 100 feet. Focuses from 4½ feet to infinity.

SCOPE VIALS: Horizontal circle, disc type vernier read to 15 minutes (¼°). Scope vial sensitivity 7-8 minutes per 2 millimeter division. Index pointer reads to 1°.

TELESCOPE CONSTRUCTION: Brass, aluminum, plastic, glass. Achromatic lenses. Precision machined fine motion parts. Rack and pinion focusing. Cross hairs in fixed focus. 4 dust protected leveling screws. Shifting center over a point. Converts from a transit to a level.

ACCESSORIES INCLUDED: Fitted carrying case, plumb bob and instruction manual.

ORDERING INFORMATION: See warranty and service information on page 95.

Level alone.

Shipping weight 7 lbs.

9 GT 46161C \$149.95

Level with stiff legged tripod (9 GT 46081C) below.

Shipping weight 19 lbs.

9 GT 46242C2 \$179.95

Level with extension leg tripod (9 GT 46082C) below.

Shipping weight 21 lbs.

9 GT 46243C2 \$194.95

(C) Non-Tilting Level

Level alone **\$88.95**

RANGE: 18 power, for work under 100 feet. Focuses 4½ feet to infinity.

SCOPE VIALS: Horizontal circle and disc type vernier read to 15 minutes (¼°). Level vial sensitivity 7-8 min. per 2 mm division; mounted, no springs. Micrometer tangent screw, clamp.

TELESCOPE CONSTR.: Brass, aluminum, plastic, glass. Achromatic lenses. Precision machined fine motion parts. Rack and pinion focusing. Cross hairs in fixed focus, 4 dust protected leveling screws. Shifting center. Built-in sunshade.

ACCESSORIES INCLUDED: Fitted carrying case, plumb bob and instruction manual.

ORDERING INFORMATION: See warranty and service information on page 95.

Level alone. Shpg. wt. 7 lbs.

9 GT 46105C \$88.95

Level with stiff legged tripod (9 GT 46081C) below.

Shipping weight 19 lbs.


9 GT 46215C2 \$119.95

Level with extension leg tripod (9 GT 46082C) below.

Shipping weight 21 lbs.

9 GT 46221C2 \$134.95

(D thru K) CRAFTSMAN® Surveying Accessories

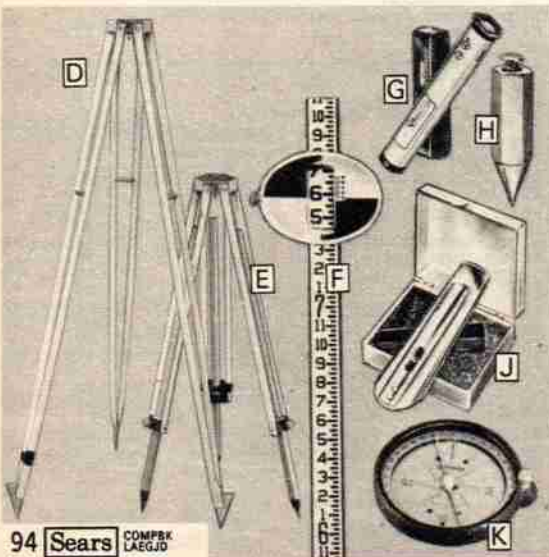

(D) Tripods with stiff-legs. For working on relatively flat terrain. Steel legs and hardware. Yellow and white markings for safety on the job. Includes leg-binding strap portability.

ORDERING INFORMATION:

60-inch long, for levels above.

9 GT 46081C—Shpg. wt. 12 lbs. \$34.95

58-inch long, for levels on page 95.

9 GT 46084C—Shpg. wt. 14 lbs. \$65.99

(E) Tripods with extension legs. For hilly, uneven terrain. Legs adjust independently of each other. Steel legs, hardware. Wood center stick. Yellow and white markings for safety on the job. Includes handy leg-binding strap.

ORDERING INFORMATION:

Extends 35 to 58 inches; for levels above.

9 GT 46082C—Shpg. wt. 14 lbs. \$49.95

Extends 37 to 59 inches; for levels on pg. 95.

9 GT 46085C—Shpg. wt. 14 lbs. \$88.95

(F) Sliding section Leveling Builders' Rod. Maple. Clip-on target. Marked in feet, inches. Vernier readings ¼ to ⅛ inch.

ORDERING INFORMATION:

9 GT 46121C—10 foot rod. Wt. 7 lbs. \$37.95

9 GT 46122C—15 foot rod. Wt. 9 lbs. 47.95

Engineers' Rod. Not shown . . . similar to (F). Marked in feet, ¼ ft., ⅛ ft. Vernier readings to 1/1000 ft.

ORDERING INFORMATION:

9 GT 46112C—10 foot rod. Wt. 7 lbs. \$37.95

9 GT 46113C—15 foot rod. Wt. 9 lbs. 47.95

(G) Locke-type Hand Level. For rough survey. Steel. Adjustable focus, 4x power. Vinyl pouch, belt loop. 6½-inches long.

ORDERING INFORMATION:

9 GT 4600—Shipping weight 11 oz. \$24.99

(H) Nickel-Plated Plumb Bob. Steel. Removable cap. Hexagonal shape.

ORDERING INFORMATION:

9 GT 38401—5 oz. size. Wt. 7 oz. 97c

9 GT 38402—8 oz. size. Wt. 10 oz. \$1.27

(J) Pocket Sight and Surface Level. For preliminary survey. Aluminum. 5-in. long. Case.

ORDERING INFORMATION:

9 GT 4624—Shipping weight 13 oz. \$9.99

(K) Jeweled Compass. Steel. 4-in. diam. Needle adjusts for dip. Variation ring in quadrants to one degree. Adj. to plus or minus 40°.

ORDERING INFO: For (A) above only.

9 GT 4613—Shipping weight 1 lb. \$27.99

building job fast and accurately with these CRAFTSMAN® Surveying Levels

- ⑥ Vernier and circle graduations are clear . . . permanent and accurately registered on metal, so it takes just seconds to line up for precise readings
- ⑦ Finishes are tough, hard-baked and extra durable for stronger impact, and they're also abrasion resistant
- ⑧ Dust protected leveling screws have large knobs for easy grasping, so working with gloves on presents little problem
- ⑨ An added plus is that circles and verniers are sized for fast, yet accurate readings to help prevent errors
- ⑩ Level vial mountings are designed to help your instrument hold its adjustment in the field.

(A and B) Contractors' Transit Levels

Both with zoom lenses that bring distant images into sharp, clear focus

RANGE: Zoom lens with 18 to 34 power . . . just turn eye-piece to change power. Ideal for shots over 125 feet or for greater accuracy at short distances. Focuses 3 feet to infinity.

PLATE, SCOPE VIALS: Horizontal circle and double vernier . . . read directly to 5 minutes (1/12°). Precision-ground. Telescope vial sensitivity of 110 seconds per 2 millimeter division and plate vial sensitivity of 130 seconds per 2 millimeter division. Four dust-protected leveling screws.

TELESCOPE CONSTRUCTION: Die-cast aluminum telescope precision bored to rifle barrel accuracy. Hard-baked finish is abrasion resistant. Achromatic lenses. Rack and pinion focusing. Focusing type eye-piece. Micrometer clamp, tangent screws are dust-protected.

ACCESSORIES INCLUDED: Fitted carrying case, sun shade and instruction manual.

(A) Levels without built-in optical plummet. Use traditional plumb bob and string to center level. Plumb bob and string included.

ORDERING INFORMATION: See warranty and service information at bottom right.

Level with zoom lens.
9 GT 46194C—Shipping weight 14 lbs. . . \$299.95

Level with zoom lens and stiff legged tripod (9 GT 46084C) on page 94.

9 GT 46245C2—Shipping weight 28 lbs. . . \$359.95

Level without zoom lens or tripod, 22 power.
9 GT 4619C—Shipping weight 14 lbs. . . \$269.95

(B) Levels with built-in plummet, lateral adjuster. Simply sight through telescope to center level. Provides faster, more accurate centering than levels above and on facing page.

ORDERING INFORMATION: See warranty and service information at bottom right.

Level with zoom lens.
9 GT 46024C—Shipping weight 17 lbs. . . \$459.95

Level with zoom lens and stiff legged tripod (9 GT 46084C) on page 94.

9 GT 46244C2—Shipping weight 31 lbs. . . \$519.95

Level without zoom lens or tripod, 22 power.
9 GT 4602C—Shipping weight 17 lbs. . . \$424.95

(C) Engineers' Transit Level

With built-in compass and tripod . . . designed for professional use on commercial job sites

RANGE: 22 power . . . ideal for shots over 125 feet. Focuses 3 feet to infinity.

COMPASS: Built into plate. Jeweled bearing and hardened steel pivot. 3 1/8-in. needle adjusts for declination. Scale in single degrees.

PLATE, SCOPE VIALS: 5 1/2-in. horizontal and 5-in. vertical circles with double verniers read directly to 1 min. Two plate vials, sensitivity of 120 secs. per 2 mm division. One telescope level vial, sensitivity of 60 secs. per 2 mm division. 4 dust-protected leveling screws.

TELESCOPE CONST: Aircraft-type aluminum alloy precision bored telescope, 10 1/2-in. long. Bronze axis journals. Hard-baked black fine-wrinkle enamel finish. Achromatic lens with crosshairs, stadia lines in fixed focus at 1:100 ratio. Rack and pinion focusing. Focusing type eye-piece. Dust-protected micrometer type tangent screws, helical counter-motion.


TRIPOD: Extends from 37 to 59-in. Hardwood painted yellow and white. Cast aluminum shoes, steel points. Clamps, strap and protective cap.

ACCESSORIES INCL: Fitted carrying case. Sunshade. 12-oz. plumb bob and string, magnifier and instruction manual.

ORDER INFO: Pay shipping, handling charges from factory in Boston, Mass. Allow extra time. No C.O.D. orders. See warranty, service info at right.
F9 GT 46106—Shipping weight 31 lbs. . . \$629.00

\$269⁹⁵


Without zoom lens

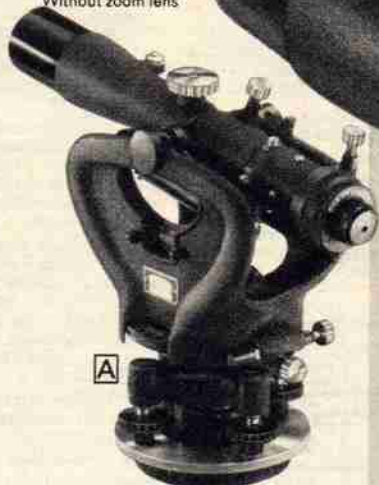

A

Without zoom lens

\$424⁹⁵

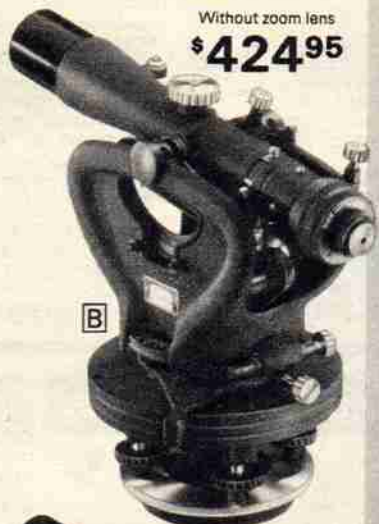

B

\$629⁰⁰



C

Extension leg tripod included

Builders' Dumpy Level

Zoom lens brings even distant images into sharp, clear focus

\$239⁹⁵



Level also available with tripod

RANGE: Zoom lens with 20 to 36 power . . . just turn eyepiece to change power. Ideal for shots over 125 feet or for greater accuracy at short distances. Focuses from 4 1/2 feet to infinity.

PLATE AND SCOPE VIALS: Horizontal circle with double vernier . . . read directly to 5 minutes (1/12°). Precision ground with sensitivity of 110 seconds per 2 millimeter division. Four dust-protected leveling screws.

TELESCOPE CONSTRUCTION: Die-cast aluminum telescope precision bored for accuracy. Hard-baked finish is abrasion resistant. Achromatic lenses. Rack and pinion focusing. Focusing type eye-piece. Dust protected micrometer clamp and tangent screws.

ACCESSORIES INCLUDED: Fitted carrying case, sun shade, plumb bob and string, instruction manual.

ORDERING INFORMATION: See warranty and service information below.

Builders' Dumpy Level with zoom lens.
9 GT 46034C—Shipping weight 14 pounds . . . \$239.95

Builders' Dumpy Level with zoom lens and stiff-legged tripod (9 GT 46084C) on page 94.
9 GT 46216C2—Shipping weight 28 pounds . . . \$299.95

FULL 1-YEAR WARRANTY ON CRAFTSMAN SURVEYING LEVELS: If within 1 year from date of purchase these Craftsman Levels fail because of a defect in material or workmanship, we will repair them free of charge. This warranty service is available by returning instruments to any Sears store in the United States

SERVICE INFORMATION: If your Craftsman Surveying Instrument should need adjustment or repairs after the warranty has expired, simply contact your nearest Sears store or Catalog Sales store for fast service at the factory at reasonable charges.

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Heat, braze, weld or cut metal..



Solid-Oxygen Welder Outfit \$2900 Complete outfit

Oxygen-propane flame reaches 5000° F hot enough for brazing, light welding or cutting light gauge sheet metal

For home and shop repairs, metal sculpture. Easy to carry to the job. Tank assembly weighs only 7 pounds. Single-valve control (no regulators).

TORCH: Plastic hand-grip surrounds brass torch stem. Includes two tips (.060 and .080-in. orifice).

ACCESSORIES INCLUDED: Standard 14.1-ounce propane cylinder; assorted oxygen pellets; rods; goggles; spark lighter; extra filter; tip cleaner; instrs.

ORDERING INFORMATION: Order extra cylinders (9 GT 5491N) from page 32, extra pellets below. See "N" suffix note on page 92, Shipping Note at left.

9 GT 5450N—Shipping weight 12 lbs. Outfit \$29.00

Extra Oxygen Pellets

TYPE, USE, ORDER INFO: Shipping weight 3 lbs. See "N" suffix note, page 92.

Catalog Number	Pellet type and uses	Approx. burn time	Price
9 GT 5451N	Assorted, varied uses	90 min.	\$3.45
9 GT 5452N	General purpose for soldering, brazing and cutting	65 min.	2.95
9 GT 5453N	Light-duty, detail work	90 min.	3.25
9 GT 5454N	Long burning for light metals up to 3/16 inches thick	100 min.	3.45
9 GT 5455N	Oxygen rich, cutting	65 min.	3.25

Welding Rods for Solid-Oxygen Welder.

SIZES AND ORDERING INFORMATION: Order from table below Package \$1.45

Catalog Number	Rod Size, in.	Description	Rods per pkg	Wt. oz.
9 GT 54501	3/32 x 18	Blue Nickel Silver Flux	3	6
9 GT 54502	3/32 x 18	White Bronze Flux	5	6
9 GT 54503	3/32 x 18	Aluminum Bare Rod	5	5
9 GT 54504	1/16 x 18	Bronze Bare Rod	5	4
9 GT 54506	1/16 x 18	Copper Coated Steel	10	6

Filters. Use Oxygen cyl.

ORDER INFO: Wt. 8 oz.

9 GT 5456 99c

Flux.

ORDER INFO: Wt. 3 oz.

9 GT 5457 Set 65c

Porta-Torch™ \$14900 Outfit

Ideal for the hobbyist who wants to weld or cut with the same torch. . . attach welding tip for steel up to 1/8 in. thick, or change to cutting tip for steel up to 1 in. thick

Totally portable cutting and welding outfit complete with carrying case that gives you a compact, easy to carry unit. Use for automobile work, home projects, hobby work. Cut, weld, braze, heat and temper metal all with the same torch.

TORCH: Brass forged stem with wrap around plastic handle. Use same torch for welding or cutting. . . simply change tips. Color coded control valves (green for oxygen, red for MAPP gas). Stainless steel valve stems give you precise flame settings. Includes 2 tips. . . cutting tip for cutting steel to 1 in. thick, welding tip for welding steel to 1/8 in. thick.

REGULATORS: Pre-set. . . no need to worry about tricky adjustments.

ACCESSORIES INCLUDED: 8-foot flexible, twin rubber hose with brass fittings; safety goggles, spark lighter, molded polyethylene carrying case with molded-in compartments for cylinders, torch, rods and accessories. Instruction manual.

CYLINDERS: Filled MAPP gas cylinder holds 16.0 ounces by weight. Order extra cylinders on page 32. Empty, refillable oxygen cylinder holds 20 cu. ft. when filled.

ORDERING INFORMATION:

See Shipping note at left.

Shipping weight 19 pounds.

9 GT 5448C \$149.00

Cut n' Weld™ Torch Kit. Same as above but

without carrying case, MAPP and oxygen cylinders.

ORDERING INFORMATION:

9 GT 5447—Shpg. wt. 5 lbs. 7 oz. \$64.95

Tips included and MAPP® gas get the job done

Outfit even includes a filled 16.0 oz. MAPP cylinder plus an empty oxygen cylinder that holds up to 20 cu. ft.



Compact too, whole outfit, including cylinders, fits into this 18x10 1/2 in. wide carry case

SHIPPING NOTE:

Alaska and Hawaii customers; propane and MAPP® cylinders must, by law, be shipped via surface transportation. Check parcel post information on page 92. Allow extra time.

Gas Welding Accessories



(1) Gas Rod Assortment. 52 copper-coated welding rods; 20 each 1/16, 3/32 in.; twelve 1/8 in. Also 15 flux-coated brazing rods; nine 3/32 in., six 1/8 in.

ORDERING INFORMATION: Pkg. of 67 rods. 9 GT 20061—Shpg. wt. 2 lb. 8 oz. Pkg. \$9.95

Copper-coated Gas Rods (not shown). 18-in.

ORDERING INFORMATION: Approx. 80 per pkg.

Shipping weight 5 lbs. 2 oz.

9 GT 20404—3/32-inch diameter. \$5.95

9 GT 20406—1/8-inch diameter. 4.95

Tip Cleaners (not shown). Cleans welding tips.

ORDER INFO: Set of 9 with case.

9 GT 5425—Shpg. wt. 4 oz. Set \$2.95

(2) Flux-coated Gas Brazing Rods. 18-in.

ORDERING INFORMATION: Shpg. wt. 1 lb. 4 oz.

9 GT 20484—3/32-in. diam. pkg. of 25 \$5.95

9 GT 20486—1/8-in. diam. pkg. of 14 5.45

(3) Oxy-acetylene Welder's Handbook. Instructions and hints. 306 pages, illustrated.

ORDERING INFORMATION:

9 GT 5411—Shipping weight 10 oz. \$5.99

(4) Twin-type Welding Hose. Neoprene covered, oil resistant. 20 feet long. Brass fittings.

ORDERING INFORMATION:

9 GT 54271—Shpg. wt. 5 lbs. 2 oz. \$14.99

(5) Adapters for Acetylene Tanks.

TYPE, ORDERING INFORMATION:

For "B" Tanks. Adapts CGA510 to CGA520.

9 GT 5408—Shipping weight 11 ounces \$5.49

For "MC" Tanks. Adapts CGA510 to CGA520.

9 GT 5409—Shipping weight 10 ounces \$5.49

(6) Anti-flash Back Protector. Reverse flow valve designed to stop accidental mixing of oxygen and fuel gas in hose and regulator. Factory tested. UL listed. Two check valves.

ORDERING INFORMATION:

9 GT 54423—Shipping weight 5 ounces \$8.95

(7) Spark Lighter. For lighting torch. 1 flint.

ORDERING INFORMATION:

9 GT 5440—Shipping weight 4 ounces 59c

(8) Extra Flints for (7). Package of 6 flints.

ORDERING INFORMATION:

9 GT 54405—Shipping weight 2 ounces Pkg. 59c

Tank Outfits and Trucks

(9) Portable Oxygen-Acetylene Cylinder Outfit. Steel cylinder, machined brass valves. Storage, carrying rack. Acetylene "MC" tank holds 10 cu. ft.; oxygen "R" tank holds 20 cu. ft. Measures 14x8x26 in. high.

ORDERING INFORMATION:

Requires "MC" adapter.

9 GT 5406C—Wt. 28 lbs. \$139.00

(10) Truck for Gas Cylinders.

Holds 2 cylinders (not included)—1 oxygen (145-cu. ft.); 1 acetylene (122-cu. ft.). Use as utility cart. Platform

base 20x10 1/4 in. deep. Overall, 38 1/2 in. high. Tubular steel frame. Tool

tray. 10-in., semi-pneumatic tires. Shipped assembled.

ORDERING INFORMATION: See "N" suffix, page 92.

9 GT 5429N—Wt. 27 lbs. \$34.95

(11) Heavy-duty Truck for Gas

Cylinders. Handles up to two 300 cu. ft. tanks or combined tank diam. of

18 3/4 in. 1-in. nylon straps for each tank helps keep them securely in

place. Platform base 24x10 1/4 in. deep. Stands 28x46 in. high. Tubular frame

of 14 ga. steel. Wheels have solid 1/4-inch steel spokes electrically welded

in place. Pneumatic tires measure 20x2.125 for easy rolling on rough

surfaces.

ORDERING INFORMATION:

Shipping weight 46 pounds.

9 GT 54291L \$75.00



Gas Welding Outfits can do them all



Proper (optional) tips let you use acetylene or propane gas to get the job done

One-stage Oxy-Acetylene Outfit

\$129⁰⁰ without cylinders

General purpose unit for home, shop, farm, garage or hobby. . . weld steel up to 1/4-inch thick. . . cutting attachment lets you cut steel up to 2 in. thick with proper tip

TORCH: Brass-forged body. Stainless steel valve stems for delicate flame settings. Needle shut-off valve seals tight. Anti-flash back mixer. Includes three welding tips (Nos. 3, 5 and 7) to fusion-weld steel up to 1/4 inch thick.

CUTTING ATTACHMENT: Brass-forged. No. 0 tip cuts steel up to 1/2 inch thick. (Cuts steel up to 2 inches thick with tip 9 GT 54437 sold separately below.)

REGULATORS: Single-stage regulation. Two pressure-tested, brass-forged regulators. Large 2-inch diameter gauges with white-on-black faces, Lexan® plastic covers.

ACCESSORIES INCLUDED: 12-feet of Siameez hose with brass fittings, safety goggles, spark lighter, wrench, instr.

ORDERING INFORMATION:

9 GT 5443—Outfit. Shpg. wt. 14 lbs. \$129.00
9 GT 54401—Welding Torch alone. Wt. 14 oz. 34.50
9 GT 54402—Cutting Attachment alone. Wt. 14 oz. 34.50
9 GT 54403—Oxygen Regulator alone. Wt. 4 lbs. 4 oz. 34.50
9 GT 54404—Acetylene Regulator alone. Wt. 4 lbs. 4 oz. 34.50

Welding Tips. For welding torch in outfit (9 GT 5443) and welding torch (9 GT 54401) only.

SIZES. ORDERING INFO:

Catalog Number	Tip size	Welding capacity
9 GT 54431	No. 1	up to 1/32 in.
9 GT 54432	No. 3	1/32 to 1/16 in.
9 GT 54433	No. 5	1/16 to 1/8 in.
9 GT 54434	No. 7	1/8 to 1/4 in.

Shpg. wt. 4 oz. Each \$4.95

Cutting Tips. For cutting attachment in outfit (9 GT 5443) and cutting attachment (9 GT 54402) only.


SIZES. ORDER INFO:

Catalog Number	Tip size	Cutting capacity, inches
9 GT 54435	No. 0	1/4 to 1/2
9 GT 54436	No. 1	1/2 to 1
9 GT 54437	No. 2	1 to 2

Shpg. wt. 3 oz. Each \$5.95

Propane Cutting Tip. For outfit (9 GT 5443) and cutting torch (9 GT 54402) sold above only. No. 1 tip. Cutting cap.: 1/2 to 1 in.

ORDERING INFORMATION:
9 GT 54438—Shipping weight 3 ounces \$5.45

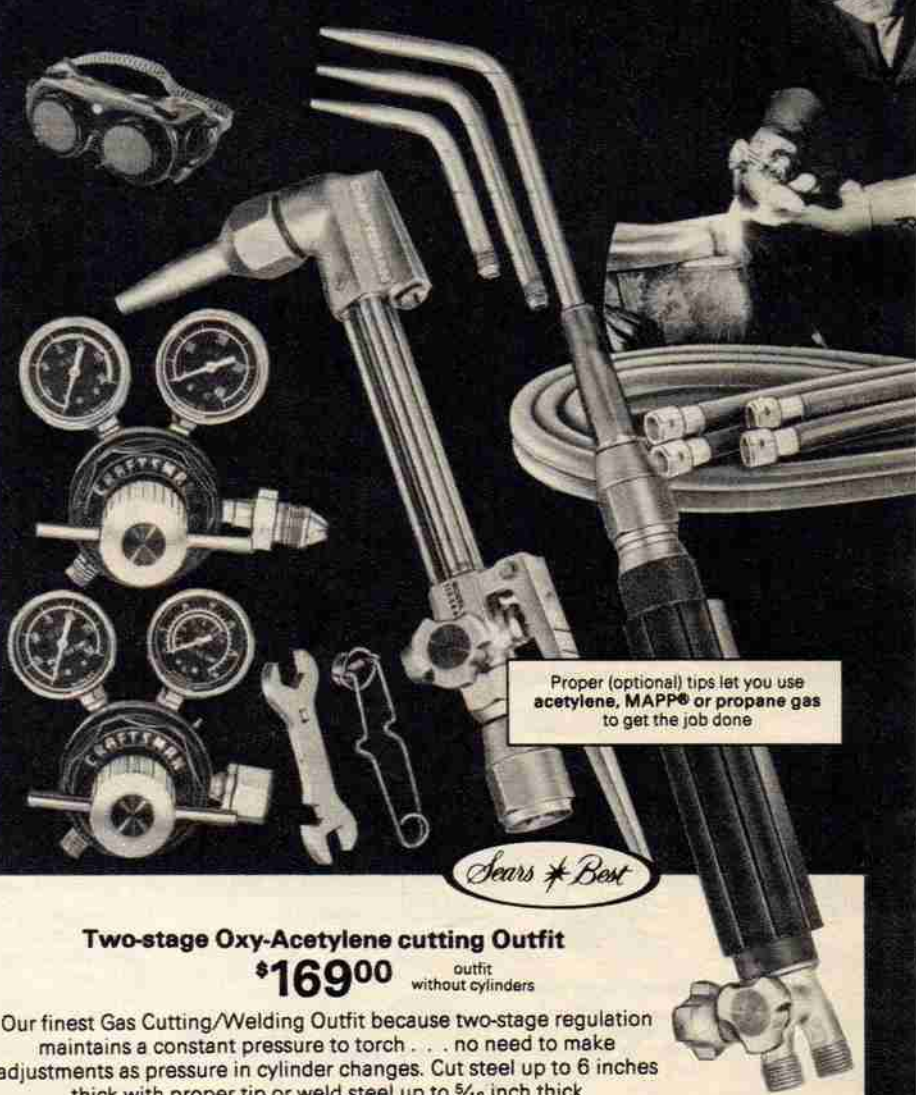

Proper (optional) tips let you use acetylene, MAPP® or propane gas to get the job done

Two-stage Oxy-Acetylene cutting Outfit

\$169⁰⁰ outfit without cylinders

Our finest Gas Cutting/Welding Outfit because two-stage regulation maintains a constant pressure to torch. . . no need to make adjustments as pressure in cylinder changes. Cut steel up to 6 inches thick with proper tip or weld steel up to 5/16 inch thick

TORCH: Brass-forged body. Stainless steel valve stems for delicate flame settings. Anti-flashback mixer with double "O" rings for leak-free, hand-tight connections. Comfort balanced handle lets you cut for long periods of time without arm fatigue. Includes three welding tips (Nos. 3, 5 and 7) to fusion-weld steel up to 1/4 inch thick.

CUTTING ATTACHMENT: Brass-forged cutting head. No. 1 tip cuts steel up to 1-inch thick. (Cuts steel up to 6 inches thick with tip 9 GT 54455 sold separately below.)

REGULATORS: Dual regulation maintains constant pressure to the torch, no need to make adjustments as cylinder pressure drops. Two pressure-tested, brass-forged regulators, large knobs, 2-inch diameter gauges with Lexan® plastic covers.

ACCESSORIES INCLUDED: 20 feet of Siameez hose with brass fittings, vinyl coverall safety goggles, spark lighter, wrench, instructions.

ORDERING INFORMATION:

Outfit.
Shipping weight 20 lbs.
9 GT 5441C \$169.00

Welding Torch alone.
Shipping weight 1 lb. 11 oz.
9 GT 54406 \$39.50

Cutting Attachment alone.
Shpg. wt. 1 lb. 11 oz.
9 GT 54407 \$42.50

Oxygen Regulator alone.
9 GT 54302—Shpg. wt. 4 lbs. \$49.00

Acetylene Regulator alone.
9 GT 54303—Shpg. wt. 4 lbs. \$49.00

Welding Tips. For use only with welding torch (9 GT 54406) sold above.

SIZES. ORDERING INFO:

Catalog Number	Size	Capacity inches
9 GT 54441	No. 1	Up to 1/32
9 GT 54442	No. 2	1/32 to 1/16
9 GT 54443	No. 3	1/16 to 1/8
9 GT 54444	No. 4	1/8 to 1/4
9 GT 54445	No. 5	1/4 to 3/8
9 GT 54446	No. 6	3/8 to 1/2
9 GT 54447	No. 7	1/2 to 3/4
9 GT 54448	No. 8	3/4 to 1

Shpg. wt. ea. 5 oz. Ea. \$5.95

Cutting tips. For use with (9 GT 54407) cutting attachment only.

SIZES. ORDERING INFO:

Catalog Number	Size	Cuts steel inches thick
9 GT 54451	No. 0	3/8 to 1/2
9 GT 54452	No. 1	1/2 to 1
9 GT 54453	No. 2	1 to 2
9 GT 54454	No. 3	2 to 3
9 GT 54455	No. 4	3 to 6

Wt. ea. 5 oz. Ea. \$6.49

Propane, MAPP® Gas Cutting Tips. Use with cutting attachment (9 GT 54406) only. Lets you use alternate fuels in areas where acetylene is unavailable or inconvenient to use.

ORDERING INFORMATION:
Shpg. wt. ea. 4 oz.

Catalog Number	Size	Capacity in. thick	Price
9 GT 54456	No. 1	1/2 to 1	\$5.45
9 GT 54457	No. 3	2 to 3	5.45

MAPP® Gas Cutting Tips
9 GT 54458 No. 1 1/2 to 1 6.45
9 GT 54459 No. 3 2 to 3 6.45

Sears Has a Credit Plan to Suit Most Every Need See Big Book or ask for details



Constant 50-ampere AC light duty Arc Welder

Includes carbon arc torch . . . operates on 115-volt current

\$54.50

Gives you a handy arc welder plus a carbon arc torch for repair jobs in home and shop. Weld metals up to 1/4 inch thick, cut lighter metals.

TRANSFORMER: Aluminum wound.

HEAT SELECTION: Constant 50 ampere, not adjustable.

CABINET: Steel. Measures 10 1/2 x 10 1/2 x 7 1/4 inches high.

ACCESSORIES: Includes electrode holder, 9000' carbon arc torch, carbons, electrodes, brazing rod assortment, cables, full face welding helmet, instruction manual.

ELECTRICAL INFO: 1725-watts, 115-volt, AC. UL listed.

ORDERING INFORMATION: Order additional electrodes below.

9 GT 20175C—Shipping weight 31 pounds Outfit \$54.50

Electrodes and Rods for use with welder above. Approx. no. in pkgs.†

9 GT 20284—1/16-in. Welding Electrodes. Pkg. of 54. Wt. 12 oz. Pkg. \$2.39

9 GT 20285—3/32-in. Contact Electrodes. Pkg. of 21. Wt. 12 oz. Pkg. 2.89

9 GT 20286—3/32-in. Brazing Rods. Pkg. of 34. Wt. 1 lb. 4 oz. Pkg. 6.89

†Quantities determined by weight; may vary due to density of rods.



Sears new AC/DC Arc Welding Outfit

Ranges of 30-230 amps AC **\$269.00**
or 30 to 180 amps DC

Choose from three kinds of welding current; AC for regular welding; DC reverse polarity for vertical and overhead welding jobs; DC straight polarity for all position welding. Use any AC or DC electrode, even low hydrogen, stainless steel hard surfacing, arc aluminum and arc bronze.

TRANSFORMER: Aluminum wound with permanently lubricated cooling fan, for steady power plus increased duty cycle (ratio of welding time to cooling time per 10-min. cycle at all heat settings).

HEAT SELECTIONS: Set controls on top of cabinet for desired heat . . . infinite heat selection on AC from 30 to 230 amps, DC from 30 to 180 amp.

CABINET: Heavy steel cabinet, baked enamel finish. Cabinet measures 11 1/2 x 13 1/2 x 21 inches high.

ACCESSORIES: Includes full face welding helmet power cable with plug, ground cable with grounding clamp, electrode cable with electrode holder and complete instruction manual.

ELECTRICAL INFO: 230-v., 60 Hz., AC.

ORDERING INFORMATION: See important specifications on next page. Order receptacle (6) below.

9 GT 20177N—Shpg. wt. 150 lbs. \$269.00

250 Amp AC/DC Welder. As above, with extended ranges . . . AC, 30-250 amps, DC, 30-250 amps.

No cord, must be wired direct.

9 GT 20178N—Shpg. wt. 155 lbs. \$299.00

All-purpose Mild Steel Welding Electrodes

Contact-type Electrodes

General-purpose electrodes (type E-7014) start on contact—hold a steady arc as long as they touch metal—restrike on contact. Metal core melts fast, so there's a flux coat to keep rod from sticking to workpiece. For use with AC or DC welders.

USES: For sheet metal fabricating, production welding, tacking, auto and farm equipment repairs.

SIZES, ORDERING INFORMATION:

Save with 25-pound bulk package.

Size inches	Catalog Number	Tube pkg. of	Wt. lbs. oz.	Tube pkg.	25-lb. pkg. Catalog No.	Pkg. of	Wt. lbs. oz.	25-lb. pkg.
3/32x12	9GT20288	44*	1 10	13	9GT20288C	325*	26	\$19.95
1/8x14	9GT20287	23*	1 15	3.49	9GT20287C	162*	26	19.95
3/32x14	9GT20288	17*	1 14	3.49	9GT20288C	162*	26	19.95

Conventional Electrodes

These general-purpose electrodes (type E-6011) weld in any position—horizontal, vertical or overhead. Arc penetrates rust, dirt to deposit a strong, dependable weld. Leaves little slag on all types of ferrous metals. For use with AC or DC welders.

USES: For repair of autos, farm equipment, structural steel pipes or tanks.

SIZES, ORDERING INFORMATION:

Save with 25-pound bulk package.

Size inches	Catalog Number	Tube pkg. of	Wt. lbs. oz.	Tube pkg.	25-lb. pkg. Catalog No.	Pkg. of	Wt. lbs. oz.	25-lb. pkg.
3/32x14	9GT20276	60*	1 13	\$3.49	9GT20276C	925*	26	\$29.95
1/8x14	9GT20277	32*	1 15	3.49	9GT20277C	455*	26	19.95
3/32x14	9GT20278	24*	1 14	3.49	9GT20278C	267*	26	19.95

*Quantities figured by weight (may vary by 3 or 4 rods).

Machineable Cast-iron Electrode. Nickel core wire. No pre-heating needed. 1/8x13 1/2 inches long.

USES: Weld cast-iron to steel, nickel alloys, copper.

ORDERING INFORMATION: Package of 6.

9 GT 20271—Shpg. wt. 8 oz. Package \$4.99

Cutting Electrodes. Measures 3/32x13 1/2 inches long.

USES: For piercing, gouging, cutting, scarfing or any alloy. Removes old welds. Bevels cracks.

ORDERING INFO: Approx. 27 in pkg.*

9 GT 20281—Wt. 1 lb. 2 oz. Pkg. \$3.49

Hard-surfacing Electrodes. Tough alloy resists abrasion. Measures 1/8x14 inches.

USES: For strong welds on equipment subject to wear.

ORDERING INFO: Approx. 23 in pkg.*

9 GT 20045—Wt. 1 lb. 15 oz. Pkg. \$3.99

Sheet-metal Electrodes. Tipped for quick starts. Measures 1/8x9 inches.

USES: For home repair, metal sculpturing.

ORDERING INFO: Approx. 64 in pkg.*



9 GT 20293—Wt. 1 lb. 2 oz. Pkg. \$3.99

Electrode Assortment. Includes 6 types, 3 sizes: contact, deep-penetrating, cast-iron, hard-surfacing, cutting, sheet-metal. 3/32, 1/8, 5/32-in.

USES: Give you a full range of arc welding operations described separately above.

ORDERING INFO: Approx. 180 in pkg.*

9 GT 20471—Wt. 10 lbs. 12 oz. Pkg. \$29.95

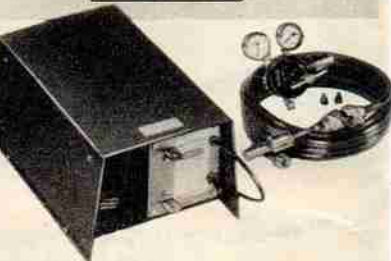

Convert your AC Arc Welder to the versatile T.I.G. (Tungsten Inert Gas) process with this outfit

Outfit \$199.00

This outfit will enable you to weld metals such as aluminum, bronze, nickel, stainless steel . . . also metals of very light gauge and up to 1/4-in. thick. Use both Arc Stabilizer and T.I.G. Torch to connect AC or AC-DC arc welders.

HOW IT WORKS: Arc stabilizer operates continuously to maintain arc. Provides long arc for AC units—tip need not touch metal during welding. Process floods molten steel with non-combining inert gas (usually argon, not included)—prevents oxidation, embrittlement of weld. No preheating. T.I.G. Torch (not sold separately) uses 1/8-in. tungsten electrode—won't pass impurities on to weld. With shutoff valve, regulator, hose, 3 collets (1/16, 3/32, 1/8-inch).

CABINET: Air cooled. Rated for 30% duty cycle. 13 1/2 x 8 1/2 x 9 1/2 in. wide.

ELECTRICAL INFO: Stabilizer uses 230-volt outlet, or wire into welder.

ORDERING INFORMATION:

Shipping weight 22 pounds.

9 GT 20118C2 Outfit \$199.00

Arc Stabilizer alone. Without torch. For easier starts with AC or AC-DC welders in stick electrode process. Measures 13 1/2 x 8 1/2 x 9 1/2 inches wide. Use 230-volt outlet or wire into welder circuit.

ORDERING INFORMATION:

9 GT 20993C—Shpg. wt. 17 lbs. \$114.00

Electrode Cup.

SIZES, ORDERING INFORMATION:

Shipping weight 3 ounces.

9 GT 20183—For 1/16, 3/32-in. \$3.19

9 GT 20188—For 1/8-in. 3.99


Tungsten-tip Electrodes.

SIZES, ORDERING INFO: Wt. 3 oz.

9 GT 20161—1/16-inch \$1.59

9 GT 20184—3/32-inch 3.74

9 GT 20188—1/8-inch 5.29

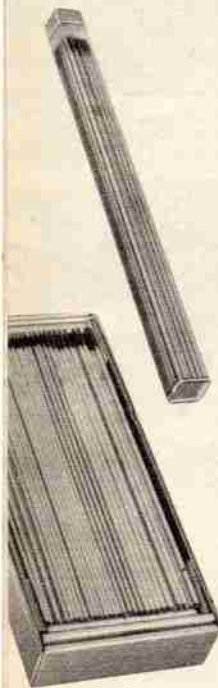

CRAFTSMAN® Arc Welding Accessories

(1) **Twin Carbon Torch.** Use with any arc welder. Two cored carbons, 5 ft. cables included. Large insulated fiber-grip handle . . . 15 1/4 in. long.

USES: Braze, solder, heat metals for bending, hardening and tempering.

ORDERING INFORMATION:

9 GT 20073—Wt. 4 lbs. 2 oz. \$29.50

Cored Carbons for (1) above. Also for welder (9 GT 20175) above.

SIZE, ORDERING INFORMATION:

Package of 10, 1/4x6 inches.

9 GT 2020—Wt. 7 oz. Pkg. \$3.49

Package of 10, 3/8x6 inches.

9 GT 20221—Wt. 11 oz. Pkg. \$3.69

(2) **Weld Chipper with Wire Brush.** Forged steel head.

ORDERING INFORMATION:

9 GT 2074—Wt. 1 lb. 4 oz. \$7.95

Extra brush for (2).

9 GT 2081—Shpg. wt. 6 oz. \$1.19

(3) **Ground Clamp.** Copper alloy. Capacity 500 amps.

ORDERING INFORMATION:

9 GT 2075—Wt. 1 lb. 6 oz. \$4.95

(4) **Electrode Holder.** Copper alloy construction. Capacity: 200 amps. Asbestos jaw covers. Holds electrodes up to 1/4-inch diameter.

ORDERING INFORMATION:

9 GT 2071—Shpg. wt. 1 lb. \$9.95

25-ft. Extension Power Cord. (Not shown). For 225-295 amp. welders. Handles 230-240 volts. 3-wire, insulated. Incl. plug, terminal.

ORDERING INFORMATION:

9 GT 20699—Wt. 8 lbs. 15 oz. \$39.99

(5) **Receptacle.** Rated 50 amps at 250 volts, 2-pole, 3-wire ground. Surface mounted. Includes hardware.

ORDERING INFORMATION:

9 GT 20698—Shpg. wt. 1 lb. \$3.99

(6) **"Arc Weld It Yourself" Manual.** Illustrated book explains arc welding process, AC electric arc welding techniques. 36 pages.

ORDERING INFORMATION:

9 GT 20256—Shpg. wt. 2 oz. 95c

(7) **Dolly Kit.** Includes two rubber wheels, axle kit.

ORDERING INFORMATION:

For 9 GT 20177N, 9 GT 20178N, former 9-20176.

9 GT 20483—Wt. 4 lbs. Kit \$8.95

For former 9-20153, 20133.

9 GT 20481—Wt. 1 lb. 4 oz. Kit \$6.49

Sears takes the guesswork out of Arc Welding . . . here's how:

Easy to follow 3-step method lets you weld at the right heat with the right size rod without the need for technical calculations

- (A) Verify thickness of metal to be welded on the *Material Thickness Gauge*. This automatically gives you the recommended rod size
- (B) Make sure you have the proper electrode size by placing rod in the *Electrode Sizes Index*
- (C) Move selector to proper heat setting on the range scale recommended for size and type of rod

Sears Exclusive top mounted controls give you one-hand heat selection . . . no need to stop work for adjustments



(1) 230-Ampere AC Dual-Range Arc Welder

45-230 amp range best for minimum current draw . . .
30-145 amp range for arc stability

\$165.00

Weld, pierce or cut metal . . . use to repair auto body or farm and construction equipment. Use carbon arc torch (9 GT 20073 sold separately, opposite page) with welder to braze, repair light gauge metal, sweat copper tubing . . . even construct metal sculptures.

TRANSFORMER: Advanced transformer design lets you weld with all electrodes up to 3/16 in. in diameter . . . even low hydrogen and stainless steel rods. Dual range transformer gives improved arc stability at the 30 to 145 ampere range or use 45 to 230 ampere range when minimum current draw is desired. Permanently lubricated cooling fan helps increase duty cycle (ratio of welding time to cooling time per 10 minute cycle) at all heat settings. Extended duty cycle means fewer pauses for cooling so you can weld more quickly.

HEAT SELECTIONS: Exclusive top mounted heat selector control lets you change

heat settings with one hand . . . no need to stop work. Locks in place. Infinite selections from 30-230 amps between 2 ranges.

CABINET: Steel with baked enamel finish measures 15x12x21 inches high. Flow thru side vents allow unit to be positioned against wall without worry of overheating because of poor air circulation.

ACCESSORIES: Electrode and ground cables, electrode holder, ground clamp, full face welder helmet, input cord with 230 volt plug and complete operating instructions.

ELECTRICAL INFORMATION: 230 volts, 60 Hz, AC, UL listed, CSA listed, NEMA rated. Requires 50 ampere circuit and wiring. See electrical specifications below. Order receptacle (9 GT 20698) sold separately on opposite page.

ORDER INFO: See Warranty below. Shipping weight 95 pounds.

9 GT 20137N \$165.00

BEFORE ORDERING, READ THESE ELECTRICAL SPECIFICATIONS CAREFULLY

Before ordering, first check voltage, cycle phase and capacity of your power line with your electric utility company or local REA office.

Catalog Number	Ampere maximum input	Input amps rated	Primary maximum short circuit	Fuses amps.	Rod sizes (inches)	Max. KVA	Max. KW	Maximum open circuit secondary	Duty cycle	Max. Power factor
9 GT 20139	73	60	60 amps	60	1/16-1/4	16.8	11.7	80-volts	†	.700
9 GT 20137	55	50	50 amps	50	1/16-1/8	12.6	7.6	80-volts	†	.660
9 GT 20177	81	65.7	92 amps	60	1/16-1/8	18.6	8.0	78-volts	†	47.6
9 GT 20178	*98	80	155 amps	60	1/16-1/4	22.7	11.2	78-volts	†	49.3
	**92	76	130 amps	60	1/16-1/4	20.7	11.2	78-volts	†	54.1
9 GT 20175	18	15	28 amps	15	1/16-3/32	2.1	1.5	45-volts	20%	70.0

*Wired for 208-volts

**Wired for 230-volts

†From 20% to 100% depending on heat



(2) 295-Ampere AC Expanded Range Arc Welder

70-295 amp., 60-200 amp and 30-60 amp ranges . . . weld any gauge metal from heavy steel plate to sensitive light gauge stock

\$199.00

Expanded third range has greater amperage to 295 to give you improved arc stability over all Sears arc welders. Weld, pierce or cut for repairing or constructing with metal. Use carbon arc torch (9 GT 20073, pg. 98) to increase versatility.

TRANSFORMER: Advanced transformer design lets you weld with all electrodes up to 3/4 in. in diameter . . . even low hydrogen and stainless steel rods. Three ranges of transformer: 70-295 amps, 60-200 amps, 30-60 amps for minimum line draw, increased arc stability. Permanently lubricated cooling fan helps increase duty cycle (ratio of welding time to cooling time per 10 minute cycle) at all heat settings. Extended duty cycle means fewer pauses for cooling so you weld faster.

HEAT SELECTIONS: Exclusive top mounted heat selector control lets you make heat settings with one hand. Locks in place. Infinite selections from 30 to 295 amperes between 3 ranges.

CABINET: Steel with baked enamel finish measures 15x12x21 in.

high. Flow thru side vents allow unit to be positioned against wall without worry of overheating from poor air circulation.

ACCESSORIES: Includes electrode and ground cables, heavy duty electrode holder and professional type ground clamp. Full face welder helmet and complete operating instructions.

ELECTRICAL INFO: 230 volts, 60 Hz., AC, UL listed, CSA listed, NEMA rated. Requires 70 ampere circuit and direct wiring. See electrical specifications at left.

ORDERING INFO: See Warranty below.

Shipping weight 110 lbs.

9 GT 20139N \$199.00

(3) Wheel Kit for Arc Welders (1) and (2) above

Give portability to your welder. Includes two 6-inch rubber tired wheels, top mount handle for maneuvering and bottom front brace for stability. Assembly and installation instructions included.

ORDERING INFORMATION:

Shipping weight 6 lbs. 2 oz.

9 GT 20482 \$8.95

Full 1-year Warranty on CRAFTSMAN Arc Welders: If these CRAFTSMAN Arc Welders fail to perform properly due to defects in material or workmanship within 1 year from date of purchase, we will repair them free of charge. This warranty service is available by returning welder to any Sears store or Service Center throughout the U.S.


BENCH GRINDERS

Like all our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these Grinders so outstanding:

- ① 100% ball bearing, permanently lubricated motor in sealed aluminum housing
- ② 16-inch gooseneck lamp with bulb protector . . . adjustable so you can put light where you need it
- ③ Adjustable shatter-resistant Lexan® plastic eye shields . . . the same tough polymer used in making astronauts' helmets
- ④ Removable wheel covers let you change wheels with ease
- ⑤ Adjustable tool rests that give you the right angle when sharpening tools or grinding metal . . . help provide a steady workpiece
- ⑥ Quench tray up front for cooling hot metals and holding temper of metal when sharpening tools
- ⑦ Rubber supports add stability and help reduce vibration for more accurate grinding, finishing and sharpening

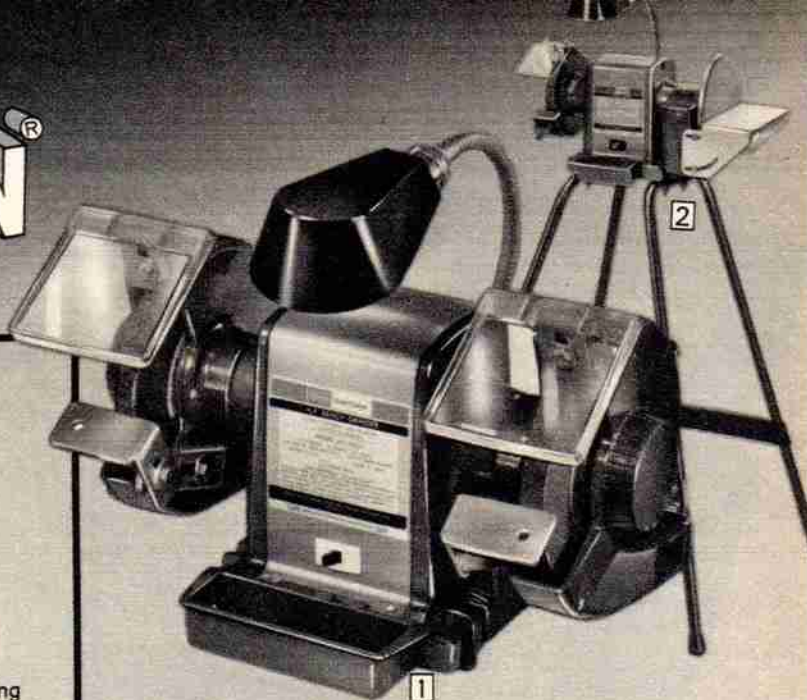

(1) CRAFTSMAN® Grinders

With two 6x3/4-inch grinding wheels

3/4-HP* **\$84⁰⁰** | 1/2-HP* **\$99⁰⁰**

MOTOR: Split-phase motor develops maximum 3/4-HP (NEMA rated under load at 1/2 HP), no-load speed of 3580 rpm. Direct drive . . . no internal brushes to replace or no belts to break or wear out. Permanently lubricated ball bearings for smooth operation and extended motor life.

GRINDING WHEELS: Two 6x3/4-in. aluminum oxide grinding wheels (medium-coarse and medium-fine). 11 1/2-in. clearance between wheels. Removable wheel guards.

HOUSING: Aluminum housing with rubber mounts help smooth vibration. Measures 15 1/2x8 1/2x10 1/4 inches high. Front-mounted on/off switch. 1/2-inch x 20-thread shaft. Adjustable Lexan® plastic eye shields to help protect eyes. Flexible 16-inch gooseneck lamp directs light where you need it. Adjustable tool rests for angle grinding. Adjustable spark arrestors and built-in quench tray for cooling hot metal.

ELECTRICAL INFORMATION: 6-foot, 3-wire cord. 115-volt, 60 Hz., AC. UL listed. Maximum idle watts: 265.

ORDERING INFORMATION: See warranty below.

Shipping weight 28 pounds.
9 GT 1939C \$84.00

1/2-HP Grinder.

Same grinder as above but has motor that develops maximum 1/2-HP (NEMA rated under load at 1/2-HP). Maximum idle watts: 285.

ORDERING INFORMATION: See warranty below.

Shipping weight 29 pounds.
9 GT 1943C \$99.00
*Maximum developed HP.

PROTECT YOUR EYES

Wear safety goggles; see complete selection of eye protectors plus other safety equipment on page 35

(2) Grinder-Sander Outfit

Includes Grinder with 3/4-HP* Motor, one 6x3/4-in. grinding wheel, light, sanding attachment (7) and stand (1) on page 101

Outfit **\$110⁰⁰**

MOTOR: Split-phase motor develops maximum 3/4-HP (NEMA rated under load at 1/2 HP), no-load speed of 3580 rpm. Direct drive. Permanently lubricated ball bearings.

GRINDING WHEEL, SANDER: One 6x3/4-in. medium-coarse aluminum oxide grinding wheel. Removable wheel guard. 8-in. sanding disc with 4x8 1/4-in. table that adjusts from 45° to 90°. With fine, medium, coarse sanding discs.

HOUSING: Aluminum housing with rubber mounts. 17 1/2x8 1/2x10 1/4 in. high. Front-mounted on/off switch. 1/2-in. x 20-thread shaft. Adjustable Lexan® plastic eye shield on grinder side. Flexible 16-inch gooseneck lamp. Grinder side has adjustable tool rest and spark arrestor. Front-mounted quench tray for cooling hot metal.

STAND: See description keyed (1) on next page.


ELECTRICAL INFORMATION: 110-120-volt, 60 Hz., AC. UL listed. 6-ft., 3-wire cord. Maximum idle watts: 265.

ORDERING INFORMATION: See warranty below.

Shipping weight 42 lbs.
9 GT 19398C2 . . . \$110.00

Grinder/Sander alone.

Shipping weight 31 lbs.
9 GT 19395C . . . \$99.00

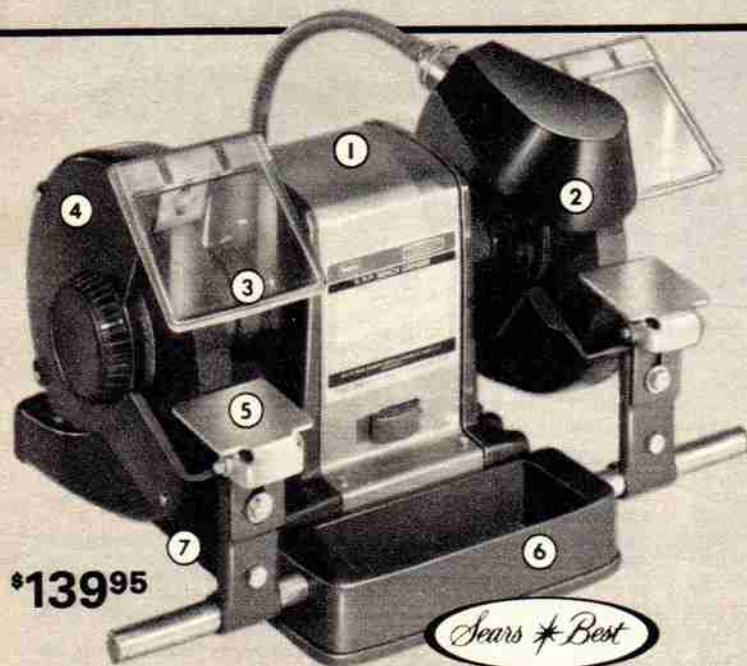

\$139⁹⁵

*Sears * Best*

Our best Bench Grinder

With two 8x1-inch wheels and our most powerful motor with 1.1 maximum developed HP

MOTOR: Split-phase, induction motor develops 1.1 HP (NEMA rated under load at 3/4 HP), 3580 rpm. Direct drive . . . no internal brushes to replace and no belts to break or wear out. Permanently lubricated ball bearings for smooth operation and extended motor life.

GRINDING WHEELS: Two 8x1-inch aluminum oxide grinding wheels (medium-coarse and medium-fine). 12-inch clearance between wheels. Removable wheel guards.

HOUSING: Aluminum housing, die-cast aluminum base with rubber mounts help smooth vibration. 20x9 1/4x12 1/2 inches high. Front-mounted on/off switch. 3/4-

in. x 18-thread shaft. Dust chutes direct grindings away from operator. Adjustable Lexan® plastic shatter-resistant eye shields help protect eyes from flying debris. Flexible 16-inch gooseneck lamp directs light where you need it. Adjustable tool rests for angle grinding. Adjustable spark arrestors and built-in quench tray for cooling hot metal.

ELECTRICAL INFORMATION: 6-foot, 3-wire cord. 110-120-volt, 60 Hz., AC. UL listed. Maximum idle watts: 330.

ORDERING INFORMATION: See Warranty at right.

Shipping weight 50 pounds.
9 GT 1945L \$139.95

FULL ONE-YEAR WARRANTY ON CRAFTSMAN BENCH GRINDERS

If any Craftsman Bench Grinder fails to give complete satisfaction within one year from the date of purchase, return it to any Sears store throughout the United States and it will be replaced free of charge.

CRAFTSMAN® 18-inch Band Saw

Four blade speeds let you cut metal up to 2 inches thick, wood stock up to 12 inches thick, yet maintain the versatility for cutting curves, bevels, miters, straight cuts . . . even resawing

Saw alone
\$1050⁰⁰

Saw with built-in motor and magnetic switch
\$1250⁰⁰

Saw includes miter gauge for precise miters and straight cuts in wood or metal

Magnetic switch not included with saw alone

USES: Heavy-duty sawing of metals, wood stock; cuts plywood without splintering; cuts curves, bevels, miters. Make compound cuts, rip or resaw boards. Saw big sections of aluminum, brass or iron castings, galvanized steel pipe . . . even saw mild steel girders.

DRIVE MECHANISM: 18-inch drive and idler wheels revolve on pre-lubricated ball bearings. Ball-bearing gear reduction allows four blade speeds; 118, 167, 221 and 3550 ft. per minute. Includes 7-in., 4-step machine pulley and 3-in., 4-step motor pulley. Foot operated brake pedal stops blade when pedal is pushed down, after power is off.

WORK TABLE: Cast-iron, measures 20x17 inches. Tilts and locks at any angle up to 45° for bevel cuts. Table has two slots for miter gauge (included).

CUT CAPACITY, OVERALL SIZE: Cuts to center of a 36-in. circle in wood up to 12 in. thick. Depth of throat with shroud, 17 in., without shroud, 18 in. Cuts metals up to 2 inches thick. Overall: 75 in. high, 22½ in. wide, 31 inches deep.

ACCESSORIES: Includes two 11-ft. blades; ¼ in. wide for cutting metals; ⅝ in. wide for cutting wood . . . order extra blades below. 2 pulleys, V-belt and miter gauge.

CAPACITOR-START 1-HP MOTOR: 1725 rpm. Permanently lubricated ball bearings. Induction run, fan cooled. Pre-wired to magnetic switch . . . if power fails or voltage drops, switch automatically shuts motor off—won't start until you reset switch.

HOUSING, CONSTRUCTION: All operating parts enclosed (except cutting portion of blade) in steel cabinet. Blade guard assembly moves up and down, can be locked in any position. Adjustable belt-blade tension control. Two rubber tires, ball bearing wheels.

ELECTRICAL INFORMATION: 115-230-v., 60-Hz., AC. 1190 full-load input watts.

ORDERING INFORMATION:

T9 GT 2381N—Shipping weight 515 pounds \$1250.00

Saw alone. Same as above but without motor and magnetic switch.

T9 GT 2380N—Shipping weight 415 pounds \$1050.00

Motor alone. Capacitor start, 1-HP, 1725-rpm. Induction run, ball bearings.

ORDERING INFORMATION:

9 GT 1240C—Shpg. wt. 32 lbs. \$84.99

Rip Fence (not shown). For CRAFTSMAN Band Saw sold above.

ORDERING INFO: See Shpg. Note below.

T9 GT 2358E—Shpg. wt. 13 lbs. \$32.99

SHIPPING NOTE

"T" items (as T9 GT 2358E) shipped from Chicago, Philadelphia, Atlanta, Dallas or Los Angeles. Customers served by other Distribution Centers should allow time. Pay shipping and handling charges from your Distribution Center. "T" items with "N" suffix (as T9 GT 2381N) C.O.D.'s accepted only for shipment to a Sears Store.

Extra 11-foot Blades for Band Saw above.

SIZES, USES, ORDERING INFORMATION:

Catalog Number	Width	Teeth	Cutting depth	Shpg. wt. ea.	Each	5 for
For metal						
9 GT 27525	¼-inch	18 per inch	0 to ½ in.	6 oz.	\$6.99	\$29.95
9 GT 27526	⅜-inch	14 per inch	¼ to ½ in.	8 oz.	6.99	29.95
9 GT 27527	½-inch	10 per inch	½ to 2 in.	10 oz.	6.99	29.95
For wood						
9 GT 27151	¼-inch	6 per inch	Use on woods	3 oz.	5.99	\$25.95
9 GT 27152	⅜-inch	6 per inch	to size limit	4 oz.	5.99	25.95
9 GT 27153	½-inch	6 per inch	of band saw	6 oz.	5.99	25.95

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

Sears New CRAFTSMAN® 10-inch Abrasive Cut-off Machine

Cuts pipe or tubing up to 2 inches in diameter, hardened tool steel bars up to 1½ inches, shaped bars up to 2½ inches

\$299⁹⁵

MOTOR, DRIVE: Capacitor-start 3-HP, 4300-rpm ball-bearing motor. Permanently lubricated, fan cooled motor is totally enclosed. Single ½ in. x 35-in. V-belt drive.

HOUSING, CONSTRUCTION: Cast aluminum. Spark arrestors on wheel guard covers entire cutting wheel except cutting portion. Permanently lubricated ball bearings in arbor for long life. Quick acting vise clamps work securely up to 2½ inches in diameter.

WHEEL, CUTTING CAPACITIES: Uses 10-inch diameter abrasive wheel (not included). Cuts solid round stock up to 1½ inches, pipe or tubing up to 2 inches and shaped metal up to 2½ inches. Saw can also be used with tungsten carbide tipped blade (sold at right) for cutting plastics. ⅝-inch arbor.

ACCESSORIES INCLUDED: Pulleys, V-belt.

ELECTRICAL INFORMATION: 230-volt, 60-Hz., AC. 3200 watts, with 4-foot, 3-wire cord.

ORDERING INFORMATION: Order abrasive wheels or tungsten carbide tipped blade at right.

Shipping weight 75 pounds.
T9 GT 2297N \$299.95



(1) Tungsten carbide tipped Kromedex® Blade. 10-in. diam. For cutting plastics on cut-off machine. Not for ferrous metals or masonry. Wt. 2 lbs. 11 oz.
9 GT 32486 Each \$17.99

(2 and 3) Abrasive Wheels. 10-inch diameter aluminum oxide, resin bond and internally reinforced. ⅝-inch thick. Only for use with abrasive cut-off machine at left. Fit ⅝-inch arbor. Not for bench saws or wood cuts.

USES, ORDERING INFO:

(2) For Fine cutting.

Wt. each 1 lb. 2 oz.

9 GT 22971 Each \$6.95

5 for 29.95

(3) For general purpose cutting of metal. Shpg. wt. ea. 6 oz.

9 GT 22972 Each \$6.95

5 for 29.95

Both saws (1) and (2) give precision 45° and 90° cuts in horizontal position... swing to vertical for contour cuts, notching, slitting



Three axes ball bearing blade guide adjustment provides added blade rigidity

Both saws have permanently lubricated sealed gear boxes for positive drive, long life... no open gears to clog with dirt and metal chips



CRAFTSMAN® Convertible Metal-cutting Band Saws

(2) Wet-cut 7-inch Saw

\$895⁰⁰

with stand and motor



Four blade speeds and hydraulic feed provide fast controlled cuts of the hardest metals. Cuts up to 7-inch round stock or 7x12-inch rectangular stock



(1) Dry-cut 4 1/2-inch Saw

\$399⁹⁵

with stand and motor

Three blade speeds, adjustable feed rate for cutting various metal stock... cuts up to 4 1/2-inch round or 4x6-inch rectangular stock

MOTOR: Split phase, 1/2-HP (NEMA rated), 1725-rpm motor. Manual reset overload protector.

HOUSING, TABLE, STAND: Cast-iron construction throughout. Precision ground bed. Saw swings to vertical position for contour cuts, notching, slitting... 3x4-inch table. Steel stand with two 6-inch wheels let you move saw where it's needed. Vise adjusts for miter cuts from 45° to 90°. Overall 36x16x55 inches high in vertical, 39-inches in horizontal.

DRIVE, BLADE, CUTTING CAPACITY: V-belt drive system. Transmission has steel worm and bronze gear with permanently lubricated ball bearings, gear box, 3-speeds; 65, 120, 220 feet per minute. Uses 1/2-in. blade. Ball bearing blade guides provide adjustment on 3 axes to keep blade from flexing even on angle cuts. Cut 4 1/2 in. round stock or 4x6 in. rectangular stock. Spring tension feed rate adjustment. Blade stops automatically when cut is completed in horizontal position only.

ACCESSORIES: V-belt, blade (14 teeth per inch).

ELECTRICAL INFO: 115 volts, 60 Hz. AC, 480 full load watts. 4-ft. 3-wire cord.

ORDER INFO: See Warranty below; motor Warranty, p. 108. Stand unassembled.

9 GT 22961N—Shipping weight 162 pounds \$399.95

FULL ONE YEAR WARRANTY ON CRAFTSMAN® STATIONARY POWER TOOLS: If, within one year from date of purchase, your CRAFTSMAN Band Saw fails due to a defect in material or workmanship, we will repair them free of charge. Warranty service is available by contacting any Sears Store or Service Center throughout the United States.

MOTOR: Split phase, 1/2-HP (NEMA rated), 1725 rpm motor. Manual reset overload protector.

HOUSING, TABLE, STAND: Heavy-duty steel construction. Saw swings to vertical position for contour cuts, notching, slitting... 3x4 inch table. Steel stand. Wet cut system for horizontal cuts... coolant is pumped from reservoir over blade and recirculated and filtered automatically for extended blade life. Quick action vise adjusts for miter cuts of 45° and 90°. Overall, 53x24x67-inch high in vertical position. 44 1/2-inch high in horizontal position.

DRIVE, BLADE, CUTTING CAPACITY: V-belt drive system. Completely sealed spur gear transmission. 4 cutting speeds; 65, 105, 180, 280 feet per minute. Uses 3/4 or 1/2-inch blade. 3 ball bearing blade guides provide adjustment on 3 axes to keep blade from flexing even on angle cuts. Cuts up to 7-inch round stock or 7x12 inch rectangular stock. Adjustable hydraulic feed and quick change tension adjustment allows operator infinite range of cutting pressures and feed rates. Stops automatically when cut is completed in horizontal position only.

ACCESSORIES: V-belt, blade (14 teeth per inch).

ELECTRICAL INFO: 115-230 v., 60 Hz. AC. 660 full load w. 4-ft. 3-wire cord.

ORDERING INFORMATION: See Band Saw Warranty at left, Motor Warranty pg. 108, Shpg. Note below. Stand unassembled.

F9 GT 22963N—Shipping weight 441 pounds \$895.00

Dry Cut 7-inch Saw. Same as (9 GT 22963) above but without wetting system.

F9 GT 22962N—Shipping weight 404 pounds \$795.00

CRAFTSMAN® Dry-cut 4-inch Metal cutting Band Saw... 3 blade speeds, gravity feed cuts 4-inch round stock or 4x6-inch rectangular stock

MOTOR: Split phase, 1/2-HP (NEMA rated), 1725-rpm sleeve-bearing. Manual overload protector.

HOUSING, TABLE, STAND: Die-cast aluminum housing. Swings to vertical position. 8x12 1/2-in. table locks. Steel stand, two 6-in. rubber wheels. Quick action vise adjusts to 45° or 90° angle... stock stop.

DRIVE, BLADE, CUTTING CAPACITY: Worm-gear, belt drive system. Solid-type blade guides. Gravity feed with spring tension. Cuts stock up to 4-in. round stock or 4x6 in. rectangular stock. 3 speeds; 90, 155, 250 fpm. 1/2-in. blade. Stops automatically when cut completed in horizontal position only.

ACCESSORIES: Cutting table, blade (14 teeth/in.).

ELECTRICAL INFORMATION: 115-230-v., 60 Hz. AC. 480 full load watts, 4-ft., 3-wire cord.

ORDERING INFORMATION: Stand unassembled. See Warranty above. See motor Warranty pg. 108.

9 GT 22964N2—Shpg. wt. 91 lbs. Outfit \$269.95

Saw, Stand. Use 1725-rpm (min. 1/2-HP) motor.

9 GT 2296N—Shpg. wt. 75 lbs. \$239.95

Motor alone. Same as above with 9 GT 22964N2.

9 GT 1233C—Shpg. wt. 16 lbs. \$39.99

SHIPPING NOTE: "F" items (as F9 GT 22963N) sent from factory in Paris, Tenn. Pay motor carrier charges from factory. Allow extra delivery time. No C.O.D.'s.

Saw, Stand and Motor **\$269⁹⁵**

Saw and Stand alone **\$239⁹⁵**



Extra Blades for CRAFTSMAN® Metal-cutting Band Saws

Extra blades for (2) (F9 GT 22963N), (F9 GT 22962N) above, right, 14 teeth per in., 107x5/8 in.

ORDERING INFORMATION:

9GT32333—Wt. ea. 14 oz. Ea. \$5.99, 5 for \$27.45

Extra blades for (1) (9 GT 22961N) sold above, left, 14 teeth per inch, 64 1/2x1 1/2-inches.

ORDERING INFORMATION:

9 GT 32332—Wt. ea. 6 oz. Ea. \$3.99, 5 for \$17.95

(3 thru 5). For 9 GT 2296N and 9 GT 22964N2 sold at right and former 9-2295, 9-22954, 9-2290, 9-22901.

TEETH, USE, ORDERING INFORMATION:

Teeth per in.	Use for cuts (in. deep)	Catalog Number	Shpg. wt. ea.	Reg. Price each	Price each when you buy 5 or more
(3) 10	Over 1-in.	9 GT 22926	6 oz.	\$4.99	\$4.49
(4) 14	1/4 to 1 in.	9 GT 22927	6 oz.	4.99	4.49
(5) 24	up to 1/4 in.	9 GT 22929	6 oz.	4.99	4.49

Sears New Compact Lathe



Lets you turn stock up to 8-inches long . . . set up and go to work in an area as small as 2 feet wide and 1 foot deep

\$199⁹⁵ Lathe, motor

(1) **Compact portable 3 in. Lathe.** Use for lightweight precision metal working. Ideal for the hobbyist, for use in workshops and model making. With proper attachments and accessories (2 thru 12) sold below you can cut threads, do mill work, end boring. You can get much of the same versatility as our bigger lathes . . . even power feed (3).

SPEEDS: Variable speed control. Adjust belt drive system speeds from 100 to 2000 rpm. Powered by 1/4-HP motor.

CAPACITY, CONTROLS: 8-inches between centers. 3 1/2 inch swing over bed. 1 3/4 inch swing over cross-slide. Manual cross feed carriage and longitudinal feeds. Calibrated headstock swivels for taper turning . . . removes for use with milling attachment (12).

CONSTRUCTION: Solid nickel/brass alloy bed with fully dovetailed slides with adjustable gibs for accurate saddle movement along bed. Adjustable permanently lubricated head stock bearings. Overall measures 18x7 1/2x6 inches high.

ACCESSORIES: Includes V-belt, faceplate and carrier, two dead centers, two hexagon keys, tool post and 1 tool bit, complete set-up and operating instructions.

ELECTRICAL INFORMATION: 110-115 volt, 60 Hz., AC. 8-foot, 3-wire cord. 300 watts.

ORDERING INFORMATION: See safety note, next page.
9 GT 2142C—Shipping weight 20 pounds \$199.95



Accessories for Compact 3-in. Lathe (1) above that give you versatility and precision turning, milling and boring

(2) **Live Center.** Use for holding work for fast spinning.

ORDERING INFORMATION:
9 GT 21428—Shpg. wt. 8 oz. \$12.95

(3) **Power Feed.** Separate gear motor drives lead screw. Feed is from right to left only, feeds at approximately 1-inch per minute.

ORDERING INFORMATION:
9 GT 21429—Shpg. wt. 4 lbs. 7 oz. \$39.95

(4) **Cut-off Tool and Holder.**

ORDERING INFORMATION:
9 GT 21425—Shpg. wt. 10 oz. \$19.95

(5) **Steady Rest.** Helps prevent whipping or wobble.

ORDERING INFORMATION:
9 GT 21426—Wt. 15 oz. \$12.95

(6) **Two Position Tool Post.** Holds cutting bits for turning.

ORDERING INFORMATION:
9 GT 21427—Wt. 7 oz. \$6.95

(7) **Collets.** Set of 5. Standard w.w. collets used by watchmakers. 1/16, 1/8, 3/16, 1/4, 5/16-in. sizes. Includes drawbar and collet adaptor.

ORDERING INFORMATION:
9 GT 21432—Wt. 1 lb. 7 oz. Set \$49.95

(8) **3-Jaw Self-centering Chuck.** Reversible jaws hold work to 2 1/4 in. diam.

ORDERING INFORMATION:
9 GT 21422—Wt. 1 lb. 2 oz. \$49.95

(9) **4-Jaw Chuck.** Reversible jaws move independently. Hold work to 2 3/4 inches in diameter.

ORDERING INFORMATION:
9 GT 21423—Wt. 1 lb. 3 oz. \$49.95

(10) **Tailstock Chuck.** 0 to 1/4 in. jacob's chuck, nos. 0 and 1 morse arbor to adapt to lathe spindle. Key.

ORDERING INFORMATION:
9 GT 21421—Wt. 10 oz. \$12.95

(11) **Screw Cutting Attachment.** Cut American and Metric thread, left and right-hand leads, internal and external threads. Instr.

ORDERING INFO: Unassembled.
9 GT 21431—Wt. 2 lbs. 7 oz. \$89.95

(12) **Vertical Milling Column.** Solid aluminum base and dovetailed vertical column. Fits on lathe where headstock was attached, attach headstock to column. Cut grooves, keyways, flycutting.

ORDERING INFORMATION:
9 GT 21424—Wt. 7 lbs. 2 oz. \$59.95



CRAFTSMAN® 6-inch Lathe with 8 speeds and 4 feeds

Turn stock up to 19 1/4-in. long and steel to a tolerance of 1/1000-in. within 2-in. of chuck jaws

Complete manual of lathe operations

Lathe without motor, bit or attachments

\$495⁰⁰



Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

(13) 8-speed, 6-inch Lathe

SPEEDS: 55, 120, 190, 300-rpm back gear drive; 430, 900, 1450, 2300 rpm in direct drive.

CAPACITY, CONTROLS: 19 1/4 in. between centers. 6-in. swing over bed and saddle wings. 3 3/4 in. swing over cross slide. Cut 8 to 96 Standard threads per inch, right or left hand. 9 threading gears. 4 feeds: .0024-in., .0039-in., .0048-in., .0078-in. Manual cross feed carriage plus power assist for reversible, longitudinal feeds.

CONSTRUCTION: One-piece, cast-iron bed. Permanently lubricated ball bearings, 4-step machine and motor pulley. 34x17 1/2x11 in. high.

ACCESSORIES: Includes two 60° centers, V-belt, 4 wrenches, set-up and operation instructions.

ORDERING INFO: See safety note on next page.
Order motor at right.
9 GT 2120N—Shipping weight 90 pounds \$495.00

(14) Metal Lathe Manual

CONTENTS: Hints on lathe care, operations and attachments. 258 pages. With machinists' tables, photos, diagrams and index tabs. Paperbound.

ORDERING INFORMATION:
9 GT 2925—Shipping weight 1 pound 4 ounces \$6.95

1/4-HP Motor for (13) (not shown). 1/4-HP capacitor start. Manual reset overload protector. 1725-rpm motor with permanently lubricated ball bearings.

ELECTRICAL INFORMATION: 115-230 volt, 60 Hz., 650 full load watts, AC. 4-foot, 3-wire cord.


ORDERING INFORMATION: See Warranty on page 103.
Shipping weight 21 pounds.
9 GT 1254C \$61.99

Precision 12 $\frac{1}{4}$ -inch Metal Turning Lathe gives you 16 speeds, 54 feeds CUTTING ACCURACY TESTED TO 1/1000 OF AN INCH*



Lathe includes this manual with valuable hints on care, operations, attachments. Machinists' tables, drawings and diagrams also included.

PLAY IT SAFE—PROTECT YOUR EYESIGHT
See page 35 for protective glasses and eye shields.

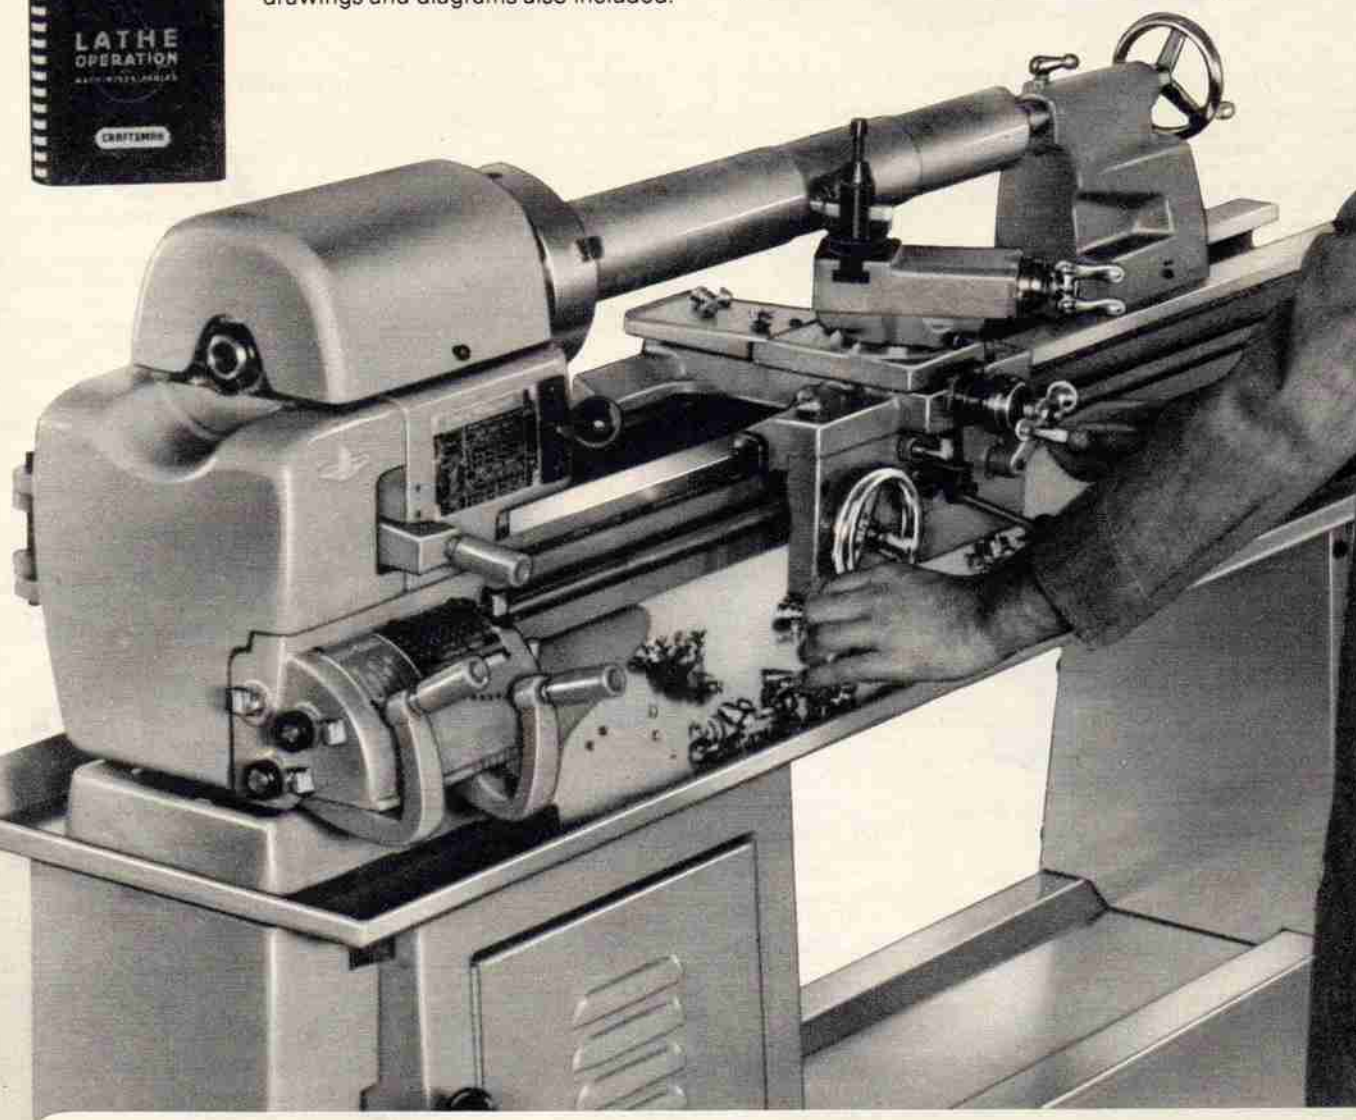

Lathe with floor
model cabinet **\$1695⁰⁰**

Lathe without floor
model cabinet **\$1495⁰⁰**

This back-geared, screw-cutting lathe could be the "heart" of your machine shop. Turn metals, plastics, wood. Cut threads, repair machine parts or fabricate new ones. With proper attachments you could turn out a whole range of lathe operations . . . milling, tapering, grinding, boring and more.

SPEEDS: 28, 45, 70, 83, 112, 134, 211, 345 rpm in back gear drive; 164, 266, 418, 500, 685, 805, 1270, 2072 rpm in direct drive.

CAPACITY, CONTROLS: 12 $\frac{1}{4}$ -in. swing over bed; 12-inch swing over saddle wings; 7 $\frac{3}{4}$ -inch swing over cross slide; 36-inch between centers. Carriage has reversible power cross, longitudinal feeds; 6 $\frac{1}{2}$ -inch cross, slide travel; $\frac{1}{2}$ -inch diam. feed screw with 8 Acme threads per inch; 2 $\frac{1}{4}$ -inch compound rest travel; $\frac{3}{8}$ x $\frac{7}{8}$ -inch slot in tool post takes $\frac{3}{8}$ -inch bits or holder for $\frac{1}{4}$ -inch bits. Headstock has 2 $\frac{3}{32}$ -inch spindle bore; $\frac{1}{2}$ -inch collet capacity; 1 $\frac{1}{2}$ -inch spindle nose with 8 threads; No. 3 Morse taper with No. 2 reducing sleeve. Tailstock with 1 $\frac{1}{8}$ -inch diam. spindle bored for Number 2 Morse taper; 2 $\frac{3}{4}$ -inch spindle travel; spindle graduated in $\frac{1}{16}$ ths of an inch from 0 to 3 inches; $\frac{3}{4}$ -inch tailstock setover for taper turning. Gear box quickly selects 54 feeds from .0042 to .250 inch. By varying gear train with optional change gears (not included), you get hundreds of additional feeds, including all standard metric threads from .25 to 7 mm. Cuts 4 to 240 Standard threads per inch, right or left hand. Threading dial shows time to engage half-nuts for successive cuts. Micrometer graduated feed-screw collars with locks for quick dialing. Base of compound rest swivels 180° . . . locks in any position. Sixty-hole indexing

mechanism for dividing operations like fluting. 12 pitch back gears at 6 to 1 ratio, oil-impregnated bearings. Horizontal countershaft drive. Lever release for quick speed changes.

CONSTRUCTION: Semi-steel bed cast in 1 piece; bed ways align to $\frac{1}{1000}$ of an inch. Timken tapered roller bearings absorb both radial and thrust loads . . . help keep friction at a minimum for long, accurate service. 4-step machine pulley, 2-step motor pulley. Overall measures 63x27x20 in. high.

ACCESSORIES: Includes "V" belt, two 60° centers, tool post, reducing sleeve for headstock centers, wrenches, set-up and operating instruction manual.

ORDERING INFORMATION: Chuck, bit and motor not included. Use at least $\frac{1}{2}$ -HP $\frac{3}{8}$ in. shaft, 1725-rpm motor. See motors on page 108. See full, 1-year tool warranty on page 103.

9 GT 2891N—Shipping weight 348 pounds . . . **\$1495.00**





Lathe with Floor-model Cabinet. Includes lathe above plus heavy gauge steel cabinet stand. 62 $\frac{3}{8}$ in. long, has rigid pedestal of $\frac{3}{16}$ -in. plate steel. Built-in chip pan with drain outlet. Underneath drive. Column encloses motor and countershaft (motor not incl.). Both countershaft and belt handles extend outside of cabinet. Overall dimensions: 63x19x48 inches high.

ORDERING INFORMATION:

9 GT 2899N—Shipping weight 505 lbs. . . **\$1695.00**

*Within 2 inches of chuck jaws.

Accessories for your metal lathes, electric drills and motors

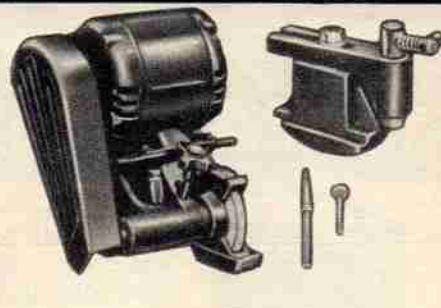

Reversing Switches, Taper Attachment, Tool Rests for metal Lathes

(1) **Reversing Switch for use on motors up to 1-HP***. Operates on any 12 1/4-in. metal-turning lathe with proper wiring. *Gives you the control to stop, reverse split-phase and capacitor motors up to 1-HP. Gives added control for precision operations like threading. For up to 550 volt, AC. Incl. installation diagram.

ORDERING INFORMATION:

Shipping weight 1 pound 9 ounces.

9 GT 2982 \$32.95

(2) **Reversing Switch for use on motors up to 1 1/2-HP***. Specifically designed to fit CRAFTSMAN® 6 and 12 1/4-in. lathes. *Use with AC single and 3-phase motors developing a maximum 1 1/2-HP. Lets you quickly stop, start and reverse lathe for added control over threading and other jobs. For up to 550 volt. Includes installation diagram, 2-wire, 8-foot cord.

ORDERING INFORMATION:

Shipping weight 4 pounds 1 ounce.

9 GT 2018 \$69.95

(3) **CRAFTSMAN Taper Attachment**. Cuts duplicate tapers on pieces of different lengths. For internal boring, external work. Index plate graduated 7°, 3 inches both sides of center line. Travels 6 inches.

ORDERING INFORMATION:

For 12 1/4-in. CRAFTSMAN lathe only.

9 GT 29845—Shipping weight 10 lbs. 9 oz. . . \$119.95

(4) **Two-piece Toolrest Set**. Mounts quickly in compound rest of metal lathes. Allows precision operations in wood, copper, brass, aluminum and plastic using handheld tools. Rugged cast-iron construction.

SIZES, ORDERING INFORMATION:

For 12 1/4 inch metal lathes. 4 and 12 in. wide sizes.

Shipping weight 2 pounds 8 ounces.

9 GT 2045 Set \$24.95

For 6-inch metal lathes. 4 and 8-in. wide sizes.

Shipping weight 1 pound 6 ounces.

9 GT 2044 Set \$19.95

Universal Tool Post Grinder

Enables 12 1/4-inch metal lathes to grind tools, dies, bearings, shafts and valves

\$379.95

Mounts easily on tool slide of lathe compound rest for precision work.


MOTOR: Two-speed 3450 rpm motor develops maximum 1/4-HP. Belt-drive gives 4900 and 9100 rpm for grinding in soft or hard metals.

COMPONENTS: Includes belt, 4-inch external and 1/2-inch internal grinding wheels (grind up to 4 1/4 inches external diameter; from 1/4 to 9 1/4 inches internal diameter). With diamond wheel dresser and quill for internal work.

ELECTRICAL INFORMATION: 110-120 volt, 60 Hz., AC. 150 maximum idle watts.

ORDERING INFORMATION:

9 GT 2998C—Shpg. wt. 37 lbs. \$379.95

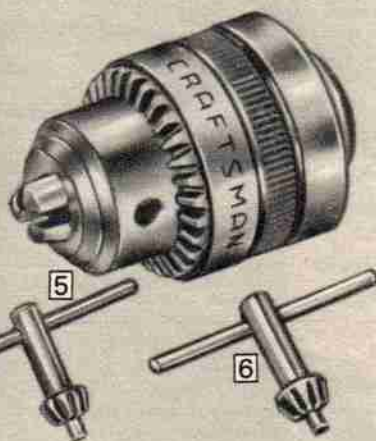

(5) Replacement Electric Drill Chucks

Low as **\$5.99**

Three-jaw keyed chuck for Sears and other electric drills. Key included. Heavy-duty steel.

THREAD SIZES, CAPACITY, ORDERING INFO:

Catalog Number	Fit Threads	Capacity	Shipping weight	Price
9 GT 2975	1/4 or 3/8-in. x 24	1/16 to 3/8 in.	15 oz.	\$5.99
9 GT 2980	1/2-in. x 20	5/16 to 1/2 in.	1 lb.	7.99


(6) Chuck Keys for electric drills

Low as **79c**

Fits geared chucks on Jacobs, Supreme or Sears electric drills listed below. Heavy-duty steel.

TYPE, ORDERING INFORMATION:

Catalog Number	Fits Jacobs Chuck	Supreme Chuck	Sears Chuck	Shpg. wt.	Each
9GT2051	1, 1A, 1BS	1A, 1T1	9-2972	4 oz.	99c
9GT2073	7, 7B, 7-1A	H17A, 4A, 4B, 4C, 4T1, 4T2	9-2979 9-2976	7 oz.	\$1.59
9GT2058	MC1, MC2, U4G	B1A, B80A, BM1A, S80A	9-2975 9-29721	4 oz.	79c
9GT2059	MC4K61	B13A, B14T33, B14B, B16B, B16A, B16T33	9-2973 9-2980	4 oz.	99c

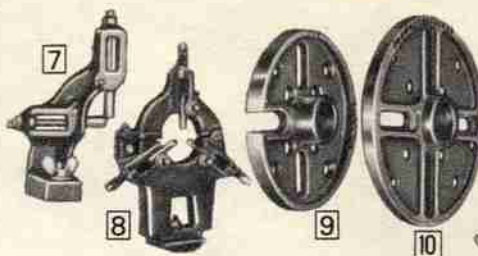

Accessories for Metal Lathes

(7) **Follower Rest**. Mounts to rear of carriage dovetail slide. For work on long slender rods.

ORDERING INFORMATION:

For 6-inch metal lathes.

9 GT 2042—Shpg. wt. 3 lbs. 2 oz. \$24.95

For CRAFTSMAN 12 1/4-in. metal lathe.

9 GT 2988—Shpg. wt. 3 lbs. 4 oz. \$24.95

(8) **Steady Rest**. Clamps to bed ways. Bronze jaws.

TYPE, ORDERING INFORMATION:

For 6-inch metal lathes. For diam. to 2 3/8 in.

9 GT 2041—Shpg. wt. 3 lbs. 2 oz. \$27.95

For CRAFTSMAN 12 1/4-in. metal lathes. Hinged type. For diameters to 2 3/8 inches.

9 GT 20508—Shpg. wt. 9 lbs. 2 oz. \$64.95

(9 and 10) **Face Plates**. Use for work which cannot be machined on the center or in the chuck. Fit on headstock spindle. Machined gray-iron casting; slots clamp work or drive lathe dog.

(9) For 6-inch metal lathes. For 1-in., 10 thread spindle. 5 1/4-inch diameter with 4 slots.

ORDERING INFORMATION:

9 GT 21405—Shipping weight 1 lb. 14 oz. \$15.95

(10) For 12 1/4 inch metal lathes. For 1 1/2 inch, 8 thread spindle. 8 1/2 in. diameter with 8 slots.

ORDERING INFORMATION:

9 GT 24755—Shipping weight 7 lbs. \$29.95

(11) **Lathe Dogs**.

Forged steel. Use with (9) or (10).

SIZE, ORDERING INFORMATION:

9 GT 21831—1/2-in. Shpg. wt. 8 oz. \$4.29

9 GT 21832—3/4-in. Shpg. wt. 10 oz. 4.99


9 GT 21833—1-in. Shpg. wt. 12 oz. 6.49

9 GT 21834—1 1/2-in. Shpg. wt. 14 oz. 7.49

(12) **Carriage Stop**. Clamps to bed way of 6-inch or 12 1/4-inch metal lathes.

ORDERING INFORMATION:

9 GT 2185—Shipping weight 1 lb. 4 oz. . . \$24.95

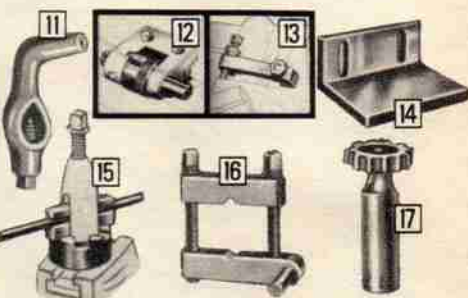

(13) **Cross Slide Stop**. Fits 12 1/4-in. metal lathes. Shows depth at which to stop cross feed. Not intended to stop cross feed automatically. To install, clamp cross slide stop to dovetail.

ORDERING INFORMATION:

9 GT 1510—Shipping weight 8 oz. \$17.95

(14) **Angle Plate**. For 12 1/4 and 10-in. metal lathes. Simplifies off-center work and machining of odd-shaped pieces. Bolt to face plate. Horizontal face, 6x4 3/4x3/8 in. Vertical face, 6x2 3/8x3/8 in.

ORDERING INFORMATION:

9 GT 1509—Shipping weight 10 lbs. \$39.99

(15) **Boring Tool Holder**.

Includes clamp ring, V-block, plain block and 1/4-inch high-speed boring tool. Slots hold boring tools of 3/16, 1/4, 5/16, 3/8 inches diameter.

ORDERING INFORMATION:

For 6-inch metal lathes.

9 GT 1515—Shipping weight 1 lb. \$16.95

For 12 1/4-in. metal lathes. Clamp ring has 1 3/4 in. outside diam., 1 1/8 in. inside diam.

9 GT 1511—Shipping weight 1 lb. \$17.95

(16) **Clamp-type Dog**.

For 12 1/4 and 6-inch metal lathes. Handles square, round, rectangular and hexagonal work. Clamp bars machined and hardened—screws heat treated for long wear. Jaws open to 2-inches.

ORDERING INFORMATION:

9 GT 1512—Shipping weight 1 lb. \$24.95

(17) **Woodruff Keyway Cutters**. 1/2-in. shank. For 12 1/4 and 6-in. metal lathes.

ORDERING INFORMATION: Wt. 8 oz.

Catalog No.	Diameter	Thickness	Each
9 GT 29961	1/2 inch	1/8 inch	\$12.95
9 GT 29962	3/4 inch	3/16 inch	13.49
9 GT 29963	1 inch	1/4 inch	16.95
9 GT 29964	1 1/8 inch	5/16 inch	18.95
9 GT 29965	1 1/4 inch	3/4 inch	21.95

Milling Accessories for Lathes

(1) **Milling Attachment.** Graduated swivel vise, flat block. For face-milling, cutting keyways, etc. Use with 6 or 12 1/4-in. lathes.

For CRAFTSMAN 6-in. Lathes. Vise capacity 2-in. Vertical feed 1 1/4-in. Cross feed 3 3/4-in.

ORDERING INFORMATION:
9 GT 2057—Shipping weight 8 lbs. 6 oz.\$94.95

For CRAFTSMAN 12 1/4-in. Lathes. Vise capacity 2 1/2 inches. Vertical feed 3 3/4-inches. Cross feed 5-inches.

ORDERING INFORMATION:
9 GT 2987C—Shipping weight 17 lbs.\$119.95

(2) **Milling Cutter Holder.** With 1/2-in. arbor. ORDERING INFORMATION:

For 6-in. lathes 9-2120, 9-2140 only.
9 GT 21408—Shipping weight 1 lb. 5 oz.\$26.95

For 12 1/4-in. lathes.
9 GT 29945—Shipping weight 2 lbs. 2 oz.\$34.95

Set of Bushings (not shown). Adapts either holder above to these end mill sizes: 1/4, 5/16, 3/8, 7/16 inch.

ORDERING INFORMATION:
9 GT 2985—Wt. 8 oz.Set \$10.95

(3) **Arbors.** Enable cutter holders (2) to take angular cutters (4).

ORDERING INFORMATION:

For 3/8-in.x24-thread cutter.
9 GT 1566—Wt. 3 oz.\$8.99

For 1/2-in.x20-thread cutter.
9 GT 1567—Wt. 3 oz.\$8.99

(4) **Angular Cutters.** Face mill, dovetail, cut angles less than 90°. Included angle of 60°.

SIZES. ORDERING INFORMATION:

1/16-inch thick, 1 1/4-inch diameter with 3/8 inch x 24 thread hole. Use with arbor 9 GT 1566 to fit holders (2).

9 GT 29951—Shipping weight 8 oz.\$34.95

3/16 inch thick, 1 5/8 inch diameter with 1/2 inch by 20 thread hole. Use with arbor 9 GT 1567 to fit holders (2).

9 GT 29952—Shipping weight 8 oz.\$34.95

(5) **Right hand Spiral End Mills**

For slots. Held in milling holder 9 GT 29945 or 9 GT 21408, with bushing 9 GT 2985.

SIZES. ORDERING INFORMATION: Wt. 8 oz.

Catalog Number	Diameter	Length flute	Each
9 GT 29971	1/4 in.	3 1/2 in.	\$9.95
9 GT 29972	5/16 in.	1 1/2 in.	9.95
9 GT 29973	3/8 in.	3 1/2 in.	10.95
9 GT 29974	7/16 in.	3 1/2 in.	10.95
9 GT 29975	1/2 in.	1 1/2 in.	11.95

**Sears Has a Credit Plan
to Suit Most Every Need**
See Big Book or ask for details

CRAFTSMAN® Lathe Chucks

(6) **Independent 4-jaw Chucks.**

Chuck body semi-steel cast with deep jaw slots for strength and bearing surface. All four reversible jaws work independently, so they're ideal for holding irregularly shaped pieces. Large jaw screw, T-handle wrench. Made in England.

SIZES AND ORDERING INFORMATION:

Cat. No.	Will fit spindle	Diam.	Shpg. wt.	Each
9GT2155	3/4-in. by 16-thread	4 in.	4 lbs.	\$64.95
9GT2159	1-in. by 10-thread	4 in.	3 lbs. 14 oz.	64.95
9GT2150	1 1/2-in. by 8-thread	6 in.	10 lbs.	109.95
9GT21581	1 1/2-in. by 8-thread	8 in.	14 lbs.	119.95

(7) **Universal 3-jaw Lathe Chucks.**

Heavy-duty self-centering type. Jaws controlled by single screw and pinion gear. . . perfect for centering work every time. Body casting of semi-steel. Alloy metal scroll, alloy steel pinion. Alloy steel jaws with raised steps heat-treated and hardened. With inside and outside gripping jaws. T-handle chuck wrench. Made in England.

SIZES AND ORDERING INFORMATION:

Cat. No.	Will fit spindle	Diam.	Shpg. wt.	Each
9GT21407	1-in. by 10-thread	4 in.	5 lbs. 8 oz.	\$119.95
9GT2165	1 1/2-in. by 8-thread	5 in.	9 lbs.	139.95
9GT2168	1 1/2-in. by 8-thread	6 in.	12 lbs. 2 oz.	164.95

(8 thru 13) **Lathe Tool Holders.** Forged steel, without bit. SIZES AND ORDERING INFORMATION:

Type	Catalog No.	Bit size	Fits Metal Lathe	Wt.	Each
(8) Straight	9 GT 2033	3/16-in.	Craftsman 6-in. lathe	8 oz.	\$9.95
(8) Straight	9 GT 2198	1/4-in.	Craftsman 12 1/4-in. lathe	10 oz.	11.49
(9) Left hand	9 GT 2035	3/16-in.	Craftsman 6-in. lathe	8 oz.	8.95
(9) Left hand	9 GT 2194	1/4-in.	Craftsman 12 1/4-in. lathe	10 oz.	7.95
(10) Right hand	9 GT 2034	3/16-in.	Craftsman 6-in. lathe	8 oz.	8.45
(10) Right hand	9 GT 2192	1/4-in.	Craftsman 12 1/4-in. lathe	10 oz.	7.95
(11) Knurling	9 GT 2036	3/16-in.	Craftsman 6-in. lathe	10 oz.	24.95
(11) Knurling	9 GT 2202	1/4-in.	Craftsman 12 1/4-in. lathe	13 oz.	19.95
(12) Threading	9 GT 2031	3/16-in.	Craftsman 6-in. lathe	10 oz.	15.95
(12) Threading	9 GT 2198	1/4-in.	Craftsman 12 1/4-in. lathe	12 oz.	15.95
(13) Cutoff	9 GT 2037	3/16-in.	Craftsman 6-in. lathe	10 oz.	15.95
(13) Cutoff	9 GT 2200	1/4-in.	Craftsman 12 1/4-in. lathe	12 oz.	14.45

Replacement Blades (not shown). For (12) above.

ORDERING INFORMATION:
9 GT 2009—For (9 GT 2037). Shipping weight 2 ounces\$4.95
9 GT 2238—For (9 GT 2200). Shipping weight 4 ounces4.95

(14) **Tool Post Sets.** 4 boring bars; internal, external threading; external turning tool; spacer, V-block.

ORDERING INFORMATION:

For 6-inch metal lathe
9 GT 2038—Shipping weight 1 poundSet \$34.95

For 12 1/4-inch metal lathe
9 GT 2189—Shipping weight 2 pounds 2 ouncesSet 39.95

(15) **Boring Tool Set.** For 6-inch metal lathes. Includes 1/4, 3/8-inch boring, and 1/4-inch threading tools, also includes V-block.


ORDERING INFORMATION:
9 GT 2008—Shipping weight 4 ouncesSet \$16.95

(16) **6-piece Formed Tool Bit Sets.** Threading bit; left-hand and right-hand facing bits; left-hand, right-hand round-nose turning bits. Made of high-speed steel.

SIZES. ORDERING INFORMATION:

1/4-inch size for 12 1/4-inch lathes
9 GT 2016—Shipping weight 6 oz.Set \$8.99

3/8-inch size for 6 inch lathes
9 GT 2017—Shipping weight 5 oz.Set 7.99

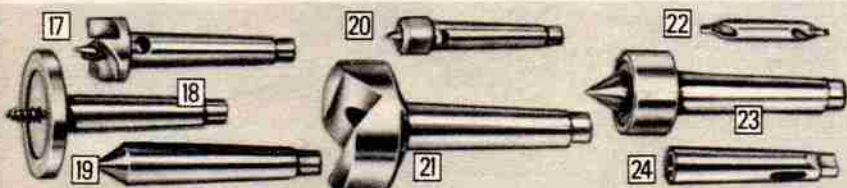

Work Centers, Adapter Sleeves for Lathes

(17) **Spur Centers.** Use for wood turning. TAPER SIZE. ORDERING INFORMATION:
9 GT 21062—No. 1 Morse taper. Wt. 6 oz.\$2.89
9 GT 21072—No. 2 Morse taper. Wt. 9 oz.3.69

(18) **Screw Centers.** Use for woodworking. TAPER SIZE. ORDERING INFORMATION:
9 GT 21164—No. 1 Morse taper. Wt. 8 oz.\$3.79
9 GT 21152—No. 2 Morse taper. Wt. 12 oz.3.89

(19) **60-degree Centers.** For metal turning. TAPER SIZE. ORDERING INFORMATION:
9 GT 21102—No. 1 Morse taper. Wt. 5 oz.\$2.39
9 GT 21112—No. 2 Morse taper. Wt. 6 oz.2.89


(20) **Tailstock Cup Centers.** For wood. TAPER SIZE. ORDERING INFORMATION:
9 GT 21002—No. 1 Morse taper. Wt. 5 oz.\$2.79
9 GT 21012—No. 2 Morse taper. Wt. 6 oz.2.89

(21) **Crotch Center.** For cross drilling round work. V-slot. Steel. No. 2 Morse taper. ORDERING INFORMATION:
9 GT 21142—Shpg. wt. 1 lb. 2 oz.\$4.19

(22) **High-speed Center Drill.** SIZES. ORDERING INFORMATION: Wt. 2 oz.
9 GT 20801—3/64 in. size; 1/4 in. body\$1.98
9 GT 20802—1/8 in. size; 3/16 in. body2.09

(23) **Ball-bearing 60° Center.** For hard wood, metal at high speeds. TAPER SIZE. ORDERING INFORMATION:
9 GT 21122—No. 1 Morse taper. Wt. 11 oz.\$6.29
9 GT 21132—No. 2 Morse taper. Wt. 13 oz.6.59

(24) **Adapter.** No. 2 to No. 1 Morse taper. ORDERING INFORMATION:
9 GT 21612—Shpg. wt. 7 oz.\$4.00

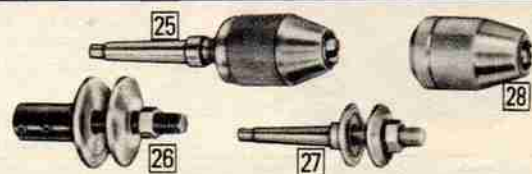

Work Arbors and Chucks for lathes, electric motors

(25) **Work Arbors with Chuck.** 3-jaw screw-on type. 1/2-inch capacity; 1/2-inchx20-thread.

TAPER SIZE. ORDER INFO:
No. 1 Morse taper.
9GT22344—Wt. 1 lb. 8 oz.\$5.79
No. 2 Morse taper.
9GT22472—Wt. 1 lb. 10 oz. 5.79

(26) **Work Arbor.** Convert motor to grinder, etc. 3 3/4 inches long, 2 3/8 inch spindle, 1/2-in.x20 thread. Carbon steel arbor, steel flanges.

BORE SIZE. ORDER INFO:
Shipping wt. 14 oz.
9 GT 21643—1/2 in. bore\$2.49
9 GT 21644—3/4 in. bore2.49

(27) **Work Arbors.** 2 steel flanges, clamping nut, 1/2-in.x20 thread.

TAPER. ORDER INFO:
No. 1 Morse taper.
9 GT 21534—Wt. 11 oz.\$3.19
No. 2 Morse taper.
9 GT 21522—Wt. 13 oz.3.19

(28) **CRAFTSMAN Key-less Chuck.** 3-jaw, screw-on, knurled. For 1/2-in.x20 thread spindle.

CAPACITY. ORDER INFO:
1/4-in. capacity.
9 GT 22482—Wt. 7 oz.\$1.99
1/2-in. capacity.
9 GT 22562—Wt. 13 oz.2.79


CRAFTSMAN® Motors for workshop tools, sump pumps, oil burners, fan and furnace blowers

FULL ONE-YEAR WARRANTY ON CRAFTSMAN MOTORS
If, within one year from date of purchase, any CRAFTSMAN Motor fails due to a defect in material or workmanship, we will replace it free of charge. This warranty service is available by returning Motor to any Sears store or Service Center throughout the United States.



(1 and 2) Capacitor-start Motors

For hard-starting tools such as: band saws, metal lathes, table saws, drill presses, wood shapers and jointer-planers



1725-rpm Motors for lower speed tools **\$61.99** 1/2-HP, ball bearings

3450-rpm Motors for higher speed tools **\$56.99** 1/2-HP, ball bearings

Capacitors in these motors reduce starting current required and increase starting torque needed for hard-to-start loads.

CONSTRUCTION: Rigid base with 3x4 7/8-in. mounting (NEMA 56-frame). Mount in any position, drip-proof in horizontal position.

ELECTRICAL INFORMATION: Runs on 60-Hz., AC (see volts in chart); 4-foot, 3-wire cord. No switch. Electrically reversible. Customer should provide in-line protection for motors without manual reset overload protectors.

ORDERING INFORMATION: See warranty above.

(1) 1725-rpm. For lower speed tools like drill presses and metal lathes. Ball-bearing types are also good for pumps or compressors.

Cat. No.	HP*	Bearings	Shaft Diameter	Volts	Watts††	Overload Protector	Shpg. wt.	Price
9 GT 1250C	1/2	Sleeve	Single 1/2-in.**	115 or 230	490	Manual reset	20 lbs.	\$49.99
9 GT 1255C	1/2	Sleeve	Double 1/2-in.** 3/4-in.†	115	660	None	21 lbs.	49.99
9 GT 1254C	1/2	Ball	Double 1/2-in.** 3/4-in.†	115 or 230	650	Manual reset	21 lbs.	61.99
9 GT 1256C	3/4	Sleeve	Single 3/4-in.†	115 or 230	960	None	24 lbs.	66.99
9 GT 1215C	1	Ball	Single 3/4-in.†	115 or 230	1200	Manual reset	38 lbs.	89.99

*HP rated according to NEMA Industry Standards

**With 3/8-in. adapter sleeve and 3/4-in. flat on shaft

†With 1/2-in. square keyway ††Full-load input watts

(2) 3450-rpm. For higher speed tools like table saws, jointer-planers, wood shapers, band saws. Double-end shaft; 3/8-inch diameter with 1/16-inch square keyway; and 1/2-inch diameter with 3/64-inch deep flat.

Cat. No.	HP*	Bearings	Volts	Watts††	Overload protector	Shpg. wt.	Price
9 GT 1216C	1/2	Sleeve	115	720	None	17 lbs.	\$49.99
9 GT 1218C	1/2	Ball	115 or 230	720	Manual reset	17 lbs.	56.99
9 GT 1226C	3/4	Sleeve	115	1000	None	19 lbs.	49.99
9 GT 1219C	3/4	Ball	115 or 230	1000	Manual reset	19 lbs.	61.99
9 GT 1217C	1	Sleeve	115	1250	None	21 lbs.	61.99
9 GT 1220C	1	Ball	115 or 230	1250	Manual reset	23 lbs.	71.99
9 GT 1221C	1 1/2	Ball	115 or 230	1800	Manual reset	21 lbs.	90.99

*HP rated according to NEMA Industry Standards

††Full-load input watts

Split-phase Motors

For easy-starting tools such as grinders, sanders and small band saws

CONSTRUCTION: 1725 rpm. Rigid base with 3x4 7/8-in. mounting (NEMA 56 frame), except (9 GT 1233) which is designed specifically for metal cutting band saw (9 GT 2296N) on page 103, has welded foot-mount base with 2 7/16 x 4 1/4-in. (NEMA 48 frame). Sleeve bearings. Mount in any position, drip-proof in horizontal position.

ELECTRICAL INFORMATION: Runs on 115-volt, 60-Hz., AC. 4-foot, 3-wire cord. No switch and no overload protector, (except 9 GT 1233 has manual overload protector). Electrically reversible.

ORDERING INFORMATION: See warranty above.

Catalog No.	HP*	Bearings	Shaft End Diameter	Volts	Watts††	Overload Protector	Shpg. wt.	Price
9 GT 1251C	1/4	Sleeve	Single 1/2-in.**	115	420	None	16 lbs.	\$29.99
9 GT 1252C	1/4	Sleeve	Single 1/2-in.**	115	480	None	16 lbs.	34.99
9 GT 1233C	1/4	Sleeve	Single 1/2-in.**	115	480	Manual Reset	16 lbs.	39.99
9 GT 1253C	1/2	Sleeve	Double 1/2-in.** 3/4-in.†	115	670	None	18 lbs.	39.99

*HP rated according to NEMA Industry Standards

**With 3/8-in. adapter sleeve and 3/4-in. flat on shaft

†With 1/2-in. square keyway

††Full-load input watts



Motor Mount
\$350

Fastens to motor base to help maintain proper V-belt tension. Mounts on top rail of bench or on cross slide, beneath top rail.

CONSTRUCTION: Swivel type . . . fits all size motors. Steel. Punched for bolts.

ORDERING INFO: Bolts not included.

9 GT 2730—Shpg. wt. 1 lb. 12 oz. \$3.50



Floating Motor Rail Set
\$249
set

For motors up to 1 HP. Helps provide proper belt tension.

CONSTRUCTION: Steel. 2 3/8 to 5 inches between centers. Complete with fasteners and 2 clips.

ORDERING INFORMATION:

9 GT 2265—Shipping weight 15 ounces Set \$2.49

Package of 2 extra clips for set above.

9 GT 2268—Shipping weight 6 ounces Pkg. 99c

(3) Split-phase Fan and Furnace Blower Motors \$39.99

1/2-HP, NEMA 48 frame

1/2-HP (rated according to NEMA Industry Standards). Replaces 1/2 thru 1/2-HP furnace blower and fan-type motors.

CONSTRUCTION: Sleeve bearings. Single-end 1/2-in. shaft with 3/8-in. adapter sleeve and 3/4-in. flat on shaft. Rigid base. Thru-bolts for direct-drive fans. Mount in any position . . . drip-proof in horizontal position.

ELEC. INFO: 115-v., 60-Hz., AC. No cord or switch. Automatic reset overload protector. Electrically reversible.

ORDERING INFORMATION: See warranty above.

Catalog Number	Speeds (rpm)	Mounting (inches)	NEMA Frame	Watts††	Wt. lbs.	Price
9 GT 1980C	1725	2 7/16 x 4 1/4	48	450	17	\$39.99
9 GT 1983C	1725	3 x 4 3/8	56	450	20	39.99
9 GT 1971C	1140	3 x 4 3/8	56	400	22	49.99
	1725			540		

††Full-load input watts

(4) Capacitor-start Fan and Furnace Blower Motor \$66.99

1/2-HP motor

1/2-HP (rated according to NEMA Industry Standards) motor . . . for hard-starting belt-driven blowers such as fans and furnaces with central air conditioning.

CONSTRUCTION: Sleeve bearings. 1725 rpm. Single-end 3/8-in. shaft, 3/16-in. sq. keyway. Mount base—3x4 3/8 in. (NEMA 56 frame). Mount any position . . . drip-proof in horizontal.

ELEC. INFO: 115 or 208-230-v., 60-Hz., AC. No cord or switch. Overload protector. Electrically reversible.

ORDERING INFORMATION: See warranty above.

9 GT 1972C—1/2-HP. 650 full-load input w. Wt. 22 lbs. \$66.99



Adjustable Pulley. Cast-iron. Outside diameter 3.15 inches. Bore 1/2 inch. Use 3L or 4L belts. Pitch 1.7 to 2.5 or 1.9 to 2.9 in. Keyway 3/16 or 3/32 inch.

ORDERING INFORMATION:

9 GT 28072—Shpg. wt. 1 lb. 4 oz. \$3.49

Split-phase Sump Pump Motors

\$36.99
1/2-HP motor



1/2-HP Split-phase Oil Burner Motor
\$36.99



CONSTRUCTION: Hub-mount 1 1/4-in. outside diameter, 1 1/2-in. inside diameter for direct mount to support tube. (NEMA 48, 48K frame). Sleeve bearings. 1725 rpm. Single-end 1/2-inch diameter flatted shaft. Mount in any position . . . drip-proof in vertical position.

ELECTRICAL INFORMATION: Runs on 115-volt, 60-Hz., AC. Electrically reversible. No switch or cord provided. Automatic reset overload protector.

ORDERING INFORMATION: See warranty above.

1/2-HP (rated according to NEMA Industry Standards) Motor. 670 full-load input watts.

9 GT 1236C—Wt. 18 lbs. \$39.99

1/2-HP (rated according to NEMA Industry Standards) Motor. 480 full-load input watts.

9 GT 1237C—Wt. 16 lbs. \$36.99

CONSTRUCTION: 1/2-HP (rated according to NEMA Industry Standards). Face mounting (NEMA 56N frame). Sleeve bearings. 1725 rpm. Single-end, 1/2-in. diam. flatted shaft. Mount in any position . . . drip-proof in horizontal. Can replace most NEMA 48, 48N, 56 and 56N frame 1725-rpm oil burner motors up through 1/2-HP.

ELECTRICAL INFO: Runs on 115-volt, 60-Hz., AC. 200 full-load input watts. Electrically reversible. 12-inch cord is stripped and skinned (no plug). No switch provided.

ORDER INFO: See warranty above. Wt. 11 lbs. 8 oz.

9 GT 1235 \$36.99

CRAFTSMAN® Heavy-duty Motors for farm and industrial equipment like augers, compressors, grain elevators

Variable-speed Motor

with constant torque at any speed between 300 and 1600 rpm... for conveyors, feed mixers, piston or gear pumps



1/2-HP (NEMA-rated). Variable speed, constant torque up to 24 oz.-ft. Not for use where motor is expected to provide downhill braking.


CONSTRUCTION: Ball bearings. Solid-state circuitry for infinite speed adjustments from 300 to 1600 rpm. Separate blower motor keeps drive motor cool through total rpm range. Mounts at any angle... drip-proof in horizontal position. NEMA 56, 143T, 145T mounting holes. 5/8-inch diameter by 1 1/2-inch long shaft, 1 1/4 x 1/8-inch key. Mounting dimensions: 9 1/2 x 7 1/2 x 1 1/2 inch. Rigid-mount base with 5/8 x 3, 4 and 5-inch mounting capabilities.

ELECTRICAL INFO: Induction run, 115-volt, 60-Hz., AC. 670 watts at high speed, 1200 watts at low speed. 8-foot, 3-wire cord. Draw from AC power without converting to DC. On-off, reversing switch, speed control, thermal overload protector reset switch located on control panel.

ORDERING INFORMATION: See warranty on opposite page.

Shipping weight 37 pounds.

9 GT 1260C... \$229.95



Make sure Heavy-duty Motors fit

"A"-Length of housing (excluding shaft). "B"-from bottom of base plate to housing top. "C"-bottom of base plate to center of shaft. "D"-maximum width of housing. Measurements in inches.

Cat. No.	A	B	C	D	Cat. No.	A	B	C	D
9 GT 1260C	13 1/2	9 1/2	3 1/2	7 1/2	9 GT 1209N	16 1/2	10 1/2	5 1/2	15 1/2
9 GT 1240C	9 1/2	8 1/2	3 1/2	6 1/2	9 GT 12011N	16 1/2	10 1/2	5 1/2	15 1/2
9 GT 1241C	10 1/2	8 1/2	3 1/2	6 1/2	9 GT 1200C	9 1/2	7 1/2	3 1/2	9 1/2
9 GT 1242L	11 1/2	8 1/2	3 1/2	6 1/2	9 GT 12011L	10 1/2	7 1/2	3 1/2	9 1/2
9 GT 1243C	10 1/2	8 1/2	3 1/2	6 1/2	9 GT 1202L	10 1/2	7 1/2	3 1/2	9 1/2
9 GT 1244N	14 1/2	8 1/2	4 1/2	13 1/2	9 GT 1203L	10 1/2	7 1/2	3 1/2	9 1/2
9 GT 1228C	9 1/2	9 1/2	3 1/2	9 1/2	9 GT 1204L	12 1/2	9 1/2	4 1/2	13 1/2
9 GT 1229C	10 1/2	9 1/2	3 1/2	9 1/2	9 GT 1205L	12 1/2	9 1/2	4 1/2	13 1/2
9 GT 1230L	11 1/2	9 1/2	3 1/2	9 1/2	9 GT 1206C	8 1/2	6 1/2	3 1/2	6 1/2
9 GT 1231C	9 1/2	9 1/2	3 1/2	9 1/2	9 GT 1207C	8 1/2	6 1/2	3 1/2	6 1/2
9 GT 1232N	15 1/2	9 1/2	4 1/2	13 1/2	9 GT 1208C	9	6 1/2	3 1/2	6 1/2
9 GT 1223C	8 1/2	8 1/2	3 1/2	8 1/2	9 GT 12012N	14 1/2	11	5 1/2	12 1/2
9 GT 1224C	9 1/2	8 1/2	3 1/2	8 1/2	9 GT 12013N	16 1/2	11	5 1/2	12 1/2

NOTE FOR ALL MOTORS ON THESE 2 PAGES

NEMA frame sizes are given for all motors. The National Electrical Manufacturers Association (NEMA) is an organization that sets strict standards for motors, one of which governs motor dimensions. The advantage to you is that any motor of a certain NEMA frame size is interchangeable with another of the same frame size. Important dimensions like the base mount and the shaft height will be the same.

(1 and 2) Capacitor-start Motors

For hard-starting farm and industrial-type equipment

Open-frame \$84.99 1-HP

For tools requiring high-starting torque. All induction run except 5-HP motors which are capacitor run.

CONSTRUCTION: Permanently lubricated ball bearings. Fan-cooled. Rigid base mount. Mount in any position... open-frame is drip-proof in horizontal position; enclosed motors are drip-proof in any position.

ELECTRICAL INFO: 60-Hertz, AC (see volts in chart). No switch or cord. Electrically reversible. Not sparkproof.

ORDER INFO: See warranty, facing p. "F" items (as F9 GT 1209N) from Wausau, Wisconsin factory. Pay motor carrier charges from factory. Allow extra time. No C.O.D.'s.

Catalog Number	HP*	RPM	Frame	Base Mount (in.)	Shaft Diam. (in.)	Volts	Watts††	Overload protector	Shpg. wt. lbs.	Price
(1) With open-frame steel housing.										
9GT1240C	1	1725	143T	4x5 1/2	3/8	115 or 230	1190	Manual reset	32	\$84.99
9GT1241C	1 1/2	1725	143T	5x5 1/2	3/8	115 or 230	1600	Manual reset	37	99.99
9GT1242L	2	1725	143T	5x5 1/2	3/8	115 or 230	2200	None	43	114.95
9GT1243C	2	3450	143T	5x5 1/2	3/8	115 or 230	2400	None	37	104.95
9GT1244N	5	1700	184T	5 1/2 x 7 1/2	1 1/8	230	5500	Manual reset	91	249.95

(2) With totally enclosed aluminum housing.										
9GT1228C	1	1725	56	3x4 1/4	5/8	115 or 230	1190	Manual reset	35	92.99
9GT1229C	1 1/2	1725	143T	4x5 1/2	3/8	115 or 230	1600	Manual reset	40	119.95
9GT1230L	2	1725	143T	5x5 1/2	3/8	115 or 230	2200	None	46	139.95
9GT1231C	2	3450	143T	5x5 1/2	3/8	115 or 230	2200	None	37	134.95
9GT1232N	5	1705	184T	5 1/2 x 7 1/2	1 1/8	230	5500	Manual Reset	91	269.95
F9GT1209N	1 1/2	1725	215T	7x8 1/2	1 1/8	208-230/460	7590	None	179	549.00
F9GT12011N	10	1725	215T	7x8 1/2	1 1/8	208-230/460	10580	None	203	699.00

(2) With totally enclosed steel housing.										
9GT1223C	1 1/2	1725	56	3x4 1/4	5/8	115 or 230	650	Manual reset	26	69.99
9GT1224C	2 1/4	1725	56	3x4 1/4	5/8	115 or 230	850	Manual reset	32	74.99

*HP rated according to NEMA Industry Standards

††Full-load input watts

Three-phase Motors enclosed \$99.95 1-HP, 1725-rpm

For outdoor use on farm equipment

CONSTRUCTION: Re-greaseable ball bearings. Mount in any position... drip-proof in horizontal position. Rigid base mount. Single-end shaft. Cast-iron end brackets. Fan-cooled. ELECTRICAL INFORMATION: Run on 208-230/460-volt, 60-Hz., AC. No switch or cord. Electrically reversible. Use where 3-phase AC power is available.

ORDER INFO: See warranty, facing p. "F" items (as F9 GT 12012N) from Wausau, Wisconsin factory. Pay motor carrier charges from factory. Allow extra time. No C.O.D.'s.

Catalog No.	HP*	RPM	Frame	Base mount	Watts††	Shaft	Shpg. wt.	Price
With steel housing.								
9 GT 1208C	1/2	1725	56	3 x 4 1/4 in.	620	3/8 in.	20 lbs.	\$54.95
9 GT 1207C	1/2	3450	56	3 x 4 1/4 in.	520	3/8 in.	19 lbs.	49.95
9 GT 1200C	1	1725	143T	4 x 5 1/2 in.	972	3/8 in.	39 lbs.	99.95
9 GT 1208C	1	3450	56	3 x 4 1/4 in.	1120	3/8 in.	24 lbs.	64.95
9 GT 1201L	1 1/2	1725	145T	5 x 5 1/2 in.	1404	3/8 in.	43 lbs.	119.95
9 GT 1202L	2	1725	145T	5 x 5 1/2 in.	1816	3/8 in.	47 lbs.	131.95
9 GT 1203L	2	3450	145T	6 x 5 1/2 in.	1864	3/8 in.	45 lbs.	126.95

With aluminum housing.								
9 GT 1204L	3	1725	182T	4 1/2 x 7 1/2 in.	2750	1 1/8 in.	44 lbs.	142.95
9 GT 1205L	5	1725	184T	5 1/2 x 7 1/2 in.	4320	1 1/8 in.	66 lbs.	189.95
F9 GT 12012N	7 1/2	1725	213T	5 1/2 x 8 1/2 in.	4508	1 1/8 in.	119 lbs.	249.00
F9 GT 12013N	10	1725	215T	7 x 8 1/2 in.	5980	1 1/8 in.	139 lbs.	299.00

*HP rated according to NEMA Industry Standards

††Full-load input watts

Low Voltage and Protective Switches.

ELECTRICAL ORDER INFO: 230-v. coils.

Low Voltage. For single-phase motors up to 2-HP.

9 GT 1201—Shipping weight 2 pounds... \$37.99

Low Voltage. For single and 3-phase motors up to 2-HP.

9 GT 1202—Shipping weight 2 pounds... \$41.99

Low Voltage Protective. For single, 3-phase motors up to 5-HP.

9 GT 1203—Shipping weight 4 pounds 15 ounces... \$74.99



(3 thru 8) Line Shaft, Accessories

Mount line shaft, couplings and collar on bench or as overhead drive. Use with 1/2-HP or larger motor. Line Shaft—use 1/2-inch for light tools; 3/4 or 1-inch for heavier machines and larger motors. Rigid Coupling—use to connect shaft to couplings. Flexible Coupling—use to connect motor to line shaft. Line Shaft Collar—helps prevent endwise drift. Has 3/4-inch bore with bushings for 1/2 and 3/4-inch shafts. Pillow Block—supports shaft... permanently-lubricated bronze bearings.

ORDERING INFORMATION:

Key	Catalog No.	Size	Accessory	Shpg. wt.	Each
(3)	9 GT 2839A	1/2, 3/4 in.	Rigid Coupling	8 oz.	\$3.49
(4)	9 GT 2833	1/2 x 24 in.	Steel Line Shaft	1 lb.	1.89
	9 GT 2834C	1/2 x 48 in.	Steel Line Shaft	3 lbs.	2.99
	9 GT 2830C	3/4 x 48 in.	Steel Line Shaft	5 lbs.	3.99
	9 GT 2835C	1 x 48 in.	Steel Line Shaft	7 lbs.	4.99
(5)	9 GT 27501	1/2 in.	Pillow Block	11 oz.	3.99
	9 GT 27502	3/4 in.	Pillow Block	11 oz.	3.99
	9 GT 27503	1 in.	Pillow Block	11 oz.	3.99
(6)	9 GT 28255	1/2, 3/4, 1 in.	Line Shaft Collar	6 oz.	1.29
(7)	9 GT 28404	1/2, 3/4 in.	Flexible Coupling	13 oz.	4.49
(8)	9 GT 2820	1/4 in.	Cup Oiler	2 oz.	29c

(9 thru 11) CRAFTSMAN® V-pulleys for motors or machines

CONSTRUCTION: Zinc alloy, aluminum finish. Grooves machined to maximum accuracy... helps eliminate belt slipping and power loss. Bore reamed to exact size.

Determine motor pulley diameter by multiplying machine pulley diam. by machine rpm wanted. Divide this figure by motor rpm.

Determine machine pulley diameter by multiplying motor pulley diam. by motor's rpm rate. Divide this figure by machine rpm you want.

(9) Single-groove V-pulleys with hubs.

Socket-head setscrew. Fit 3/8 (3L) or 1/2-inch (4L) V-belts, except 9 GT 2800 which is for 3/8-inch (3L) belt only. 3/8, 1/2-inch bores have standard keyway.

ORDERING INFORMATION:

Catalog Number	Outside diameter	Bore size	Wt. lbs. oz.	Each
9 GT 2800	1 1/2 in.	1/2 in.	4	99c
9 GT 28011	2 in.	1/2 in.	6	\$1.09
9 GT 28012	2 in.	3/4 in.	6	1.09
9 GT 28021	2 1/2 in.	1/2 in.	7	1.39
9 GT 28022	2 1/2 in.	3/4 in.	7	1.39
9 GT 28031	3 in.	1/2 in.	9	1.69
9 GT 28032	3 in.	3/4 in.	9	1.69
9 GT 28041	4 in.	1/2 in.	11	1.99
9 GT 28042	4 in.	3/4 in.	12	1.99
9 GT 28051	4 1/2 in.	1/2 in.	13	2.49
9 GT 28052	4 1/2 in.	3/4 in.	14	2.49
9 GT 28061	4 1/2 in.	1 in.	1	3.29
9 GT 28062	4 1/2 in.	3/4 in.	1	3.29

*These pulleys are spoke type.

(10) Cone V-pulleys.

Three or four-step design. Socket-head setscrew. Pulleys are made to fit 3/8 inch and 1/2-inch V-belts. Pulleys with 3/8-inch bores have standard keyway.

ORDERING INFORMATION:

Catalog Number	Bore (in.)	Step diam. (inches)	Wt. lbs. oz.	Each
9GT27881	1/2	3/8, 2 1/2	1	\$3.49
9GT27882	1/2	3/8, 2 1/2	1	3.49
9GT27921	1/2	4, 3 1/2, 2 1/2	1	7.49
9GT27922	1/2	4, 3 1/2, 2 1/2	1	8.49
9GT27931	1/2	5, 4, 3, 2	1	10.49
9GT27932	1/2	5, 4, 3, 2	1	12.49

(11) Hubless Single-groove V-pulleys.

Socket-head setscrew. Fit 3/8-inch (3L) or 1/2-inch (4L) V-belts. 2 1/2, 3-inch diameter pulleys in 3/8-inch bores have standard keyways.

ORDERING INFORMATION:

Catalog Number	Outside diameter	Bore in.	Shpg. wt.	Each
9 GT 29011	2 in.	1/2	5 oz.	\$1.09
9 GT 29012	2 in.	3/4	5 oz.	1.09
9 GT 29021	2 1/2 in.	1/2	6 oz.	1.39
9 GT 29022	2 1/2 in.	3/4	6 oz.	1.39
9 GT 29031	3 in.	1/2	7 oz.	1.69
9 GT 29032	3 in.	3/4	8 oz.	1.69



Table Saw Accessories



CRAFTSMAN® Accessory Kit for Table Saws \$69.99

Save \$16.85. Separate prices total \$86.84.

KIT INCLUDES: **Triple-cutter Molding Head with 12 Bits.** 7-in. diameter. Fits 9, 10 or 12-in. table saws. Includes cutter head, bushing, 12 bits (four 3-bit sets) . . . cabinet door lip, 3 bead (1/4-in. each), 5/16-in. cove and bead, 1-in. planer and jointer. Head fits 5/8 or 3/4-in. round arbors. For complete description see (9 GT 3218) p. 113. **Dado with Kromedge® Blades.** Two 1/8-in. outside cutters, four 1/8-in. chippers, one 1/16-in. chipper. Dadoes to 1/4-in. deep. Maximum width of cut 1 1/16-in. Fit 5/8-in. round arbors. For complete description see (9 GT 3257) p. 113. **Taper Jig.** For complete description see (9 GT 3233), item (7) below. **Hold-down Attachment.** For complete description see (9 GT 3230) below. **8-inch Sanding Wheel.** Two medium-grit sanding surfaces: one flat, one with 2° taper. Fits 5/8, 1/2-in. arbors. For complete description see (9 GT 2274) p. 111. **Flexible Mask Goggles.** For complete description see (9 GT 1859) p. 35.

ORDERING INFORMATION:

9 GT 32774—Complete Kit. Shipping weight 13 lbs. 8 oz. . . . Kit \$69.99

Hold-down Attachment (shown in kit above). For radial, table saws. Comes with four holding fingers, two clamps, hardware, set-up instructions.

ORDERING INFORMATION:

9 GT 3230—Shipping weight 2 pounds 11 ounces . . . \$8.99




CRAFTSMAN® Power Tool Handbook

Features instructions on the use of the table saw. Includes chapters on special as well as standard saw operations, dado, molding and sanding operations. Also sections on the band saw, drill press, wood lathe, wood shaper, stationary sander, stationary planer and how to sharpen your tools. Illustrated section on how to make 32 different wood joints. In all, over 600 professional operations described and illustrated. 207 pages. See p. 191 for more "how-to" books.

ORDERING INFORMATION:

9 GT 2918—Wt. 14 oz. . . . \$4.99

For our complete selection of rugged stands for table saws, see page 112.



(1) **CRAFTSMAN Universal Jig.** Holds work firmly to make cuts with blades and dadoes. Cuts joints such as tenons and open mortises. Fits any table saw with 3/4-in. wide x 3/8-in. deep miter slot. Kromedge® 8-in. tenoning blade cuts grooves 1/8-in. wide. For materials up to 2 in. thick. Also includes two plates and two clamps.

ORDERING INFORMATION: Not for saws (former 9-2415C and 9-2413C).

9 GT 3231—Shipping weight 6 lbs. 2 oz. . . . \$22.99

(2) **Hold-down Clamp for miter gauge** (3). Also for most CRAFTSMAN miter gauges except those included with saws (9 GT 24151 and former 9-2415C). Use for all types of bevel and miter cuts. Clamps stock firmly to miter gauge. Steel construction.

ORDERING INFORMATION: Shipping weight 1 pound 12 ounces.

9 GT 29928 . . . \$12.50

(3) **CRAFTSMAN Miter Gauge.** Fits most table saws with 3/4-inch wide x 3/8-inch deep grooves and most table tops with 3/4-inch wide groove. Gives you accurate settings with positive stops at 90° and 45°, right and left.

CONSTRUCTION: Die-cast, accurately machined aluminum head. Steel degree indicator.

ORDERING INFORMATION: Order hold-down clamp (2) above and stop rods (4) below separately. Not for former saw (9-2413C).

9 GT 29929—Shpg. wt. 3 lbs. 2 oz. . . . \$15.15

(4) **Stop Rods for miter gauge** (3). Made of steel. ORDERING INFO: Not for saw (9 GT 24151). Shipping weight 15 ounces.

9 GT 29924 . . . \$3.50

(5) **Solid-type Table Extension.** Mounts either side of saw table. Formed steel; installation bolts.

SIZES AND ORDERING INFORMATION:

10x20 inches. Fits saws (9-2914, 9-2411, 9-24114, 9-2419, 9-24192, 9-2404, 9-24042, 9-2958, 9-29582). Order adapter kit separately below to fit saws (9-2428, 9-24281, 9-24282).

9 GT 29954—Shpg. wt. 10 lbs. 8 oz. . . . \$19.99

10x27 inches. Fits saws (9-29912, 9-29914, 9-29904, 9-2418). Order adapter kit separately below to fit saws (9-29911, 9-2994, 9-2996, 9-2993, 9-2995, 9-2997, 9-29913).

9 GT 29957C—Shpg. wt. 15 lbs. . . . \$19.99

Saw Adapter Kit for Extensions above.

ORDERING INFORMATION:

9 GT 29999—Shipping weight 1 lb. . . . Kit \$4.49

(6) **20-in. Adjustable Extension.** Increases work space by up to 400 sq. in. for big cutting tasks.

ORDERING INFORMATION: Fits all Craftsman table saws except (9 GT 24151, former 9-2415, 9-2413).

9 GT 2178—Shpg. wt. 12 lbs. . . . \$19.99

(7) **CRAFTSMAN Taper Jig.** Lets you cut tapers up to 3 inches per foot or 15°. Extruded aluminum with locking brackets, handle and scale in degrees of taper and inches per foot for accurate work.

ORDERING INFORMATION:

9 GT 3233—Shpg. wt. 2 lbs. 4 oz. . . . \$8.99

(8) **Saw Guard Assembly.** Clear plastic and aluminum construction.

ORDERING INFORMATION: Fits (former 9-2990, 9-2991N, 9-2992N, 9-2994N, 9-2999N).

9 GT 29906—Shpg. wt. 4 lbs. . . . \$19.99



(9 thru 11) Table Inserts

(9) **Dado Insert.**

SIZES, CONSTRUCTION, ORDERING INFO:

For 12-in. saws (9-2418, 9-29913, 9-2993). Steel . . . adjustable to table surface. For 8-in. dado head.

9 GT 29935—Shpg. wt. 1 lb. 10 oz. . . . \$6.49

For 8-in. saws (9-2428, 9-24282). Steel . . . adjustable to table surface. For 6-in. dado head.

9 GT 29937—Shpg. wt. 1 lb. . . . \$6.49

For 7 1/2-in. saws (9-2421C, 9-2413C). Aluminum . . . no adjustment necessary. For 6-in. dado head.

9 GT 24211—Shpg. wt. 5 oz. . . . \$2.99

(10) **Molding Insert.**

SIZES, CONSTRUCTION, ORDERING INFO:

For 8-in. saws (9-2428, 9-24282). Steel . . . adjustable to table surface. For 4 3/4 and 5 3/8-in. molding heads.

9 GT 29938—Shpg. wt. 15 oz. . . . \$6.49

For 7 1/2-in. saws (9-2421, 9-2413, 9-2415, 9-24151). Aluminum . . . no adjustment necessary. For 5/8-in. molding head.

9 GT 24212—Shpg. wt. 5 oz. . . . \$2.99

(11) **Combination Dado-Molding Insert.** Steel . . . adjustable to table surface. For 7-in. dado and 7-in. molding heads except (9 GT 29994) which also fits all molding heads.

SIZES AND ORDERING INFORMATION:

For 12-in. saws (9-2418, 9-29913, 9-2993).

9 GT 29995—Shpg. wt. 1 lb. 10 oz. . . . \$6.50

For 10-in. saws (9-2990, 9-2994, 9-2996, 9-29911, 9-29912, 9-29904, 9-29914).

9 GT 29994—Shpg. wt. 1 lb. 15 oz. . . . \$6.99

For 10 and 9-in. saws (9-2404, 9-24042, 9-2958, 9-29582, 9-2419, 9-24192).

9 GT 29933—Shpg. wt. 2 lbs. 2 oz. . . . \$6.99

For 9-in. saw (9-2414).

9 GT 29934—Shpg. wt. 1 lb. 2 oz. . . . \$3.99

For 9-inch saws (9-2411, 9-24114).

9 GT 24213—Shpg. wt. 2 lbs. 2 oz. . . . \$3.99

Accessories for both Table and Radial Saws

Blade Sharpener . . . attaches directly to saw

Handle most every blade reconditioning job including reshaping, re-toothing and jointing. For table, radial saws with 1/2, 3/8, 1/4, 1-in. round arbors. Mounts, removes quickly. Sharpens regular blades up to 12 in. diam. Grinding wheel 60 grit, measures 6 1/4 x 5/8 in. Not for carbide-tipped or disposable blades.

ORDERING INFORMATION:

9 GT 3532—Wt. 5 lbs. . . . \$29.99

Replacement Grinding Wheel.

ORDER INFO: For sharpener above.

9 GT 35321—Wt. 14 oz. . . . \$6.99

Blade Setting Tool





Lets you set and re-set 4 to 16-in. circular saw blades . . . helps keep teeth alternately beveled for smooth cutting, extended blade life. Simple to operate . . . place blade on stud, adjust beveled anvil for desired set, strike anvil. Turned steel and cast iron construction. Mounts to work table or bench. Set before sharpening. Not for carbide-tipped, disposable blades.

ORDERING INFO:

Shpg. wt. 6 lbs. 8 oz.

9 GT 23391 . . . \$59.99



Radial Saw Accessories



CRAFTSMAN® Power Tool Handbook

Features instructions for the use of your radial saw. Includes chapters on special as well as standard operations, use of accessories. With additional sections on the use of the band saw, drill press, wood lathe, wood shaper, stationary sander, stationary planer and how to sharpen your tools. Fully illustrated section on how to make 32 different wood joints. In all, over 600 professional operations described, illustrated. Vinyl cover. 224 pages. See p. 191 for more "how-to" books.

ORDERING INFORMATION:
Shpg. wt. 15 oz.

9 GT 2917 \$4.99

For our complete selection of stands for radial saws, see p. 112.

CRAFTSMAN® Accessory Kit \$59.99 for Radial Saws

Save \$18.32. Separate prices total \$78.31.

KIT INCLUDES: Triple-cutter Molding Head, 9 Bits. Three 3-bit sets: cabinet door lip, 1/8-in. cove and bead, 1-in. planer, jointer. For complete description see cutter head (9 GT 3214) and bits, p. 113. Adapter. For routing, drilling. For description, see (9 GT 3239) below. Molding Head/Dado Guard. For description, see (9 GT 3267), p. 113. Hold-down Attachment. For description see (9 GT 3230) below. Flexible Mask Goggles. See (9 GT 1859), p. 35.

ORDERING INFORMATION:

9 GT 3277-Complete Kit. Shipping weight 11 lbs. 8 oz. Kit \$59.99

Adapter. (Shown in kit above). Enables saw to accept routing or drilling bits with 1/4-inch shanks. Fits arbor with 1/2x20-thread accessory ends.

ORDERING INFORMATION:

9 GT 3239—Shipping weight 4 ounces \$2.49

Molding Head/Dado Guards. (Shown in kit above). Use with dado blades or molding cutters when radial saw spindle is positioned vertically.

SIZES AND ORDERING INFORMATION: Not for former saw 9-2922.



9 GT 29524—For up to 7-in. blades and heads. Wt. 1 lb. 1 oz. \$9.99

9 GT 29523—For up to 8-in. blades and heads. Wt. 1 lb. 8 oz. 9.99

Hold-down Attachment. (Shown in kit above). For radial saws, table saws. With four holding fingers, two clamps, hardware, set-up instructions.

ORDERING INFORMATION:

9 GT 3230—Shipping weight 2 pounds 11 ounces Set \$8.99

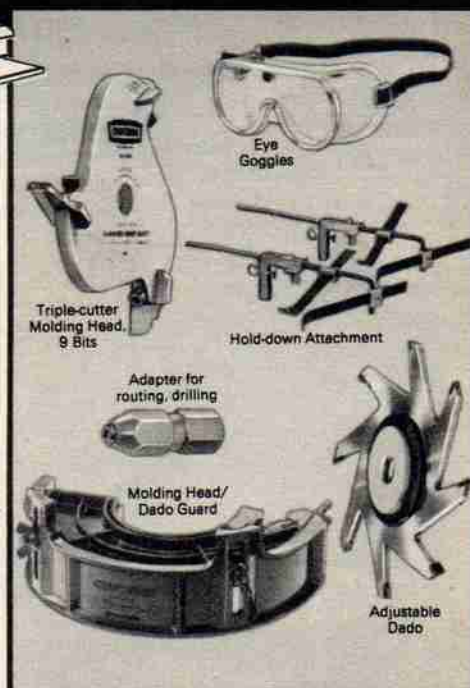

(1) CRAFTSMAN Buffing Wheel

CONSTRUCTION: With 8-inch diameter. Spiral-sewed muslin, raked edges. Thirty layers thick, 64x64 threads per inch. Fits 1/2 and 3/4-inch shafts.

ORDERING INFORMATION:

9 GT 64932—Shipping weight 8 ounces \$2.49

(2) Sanding Drum

CONSTRUCTION: With 3-inch face; 2 1/4-inch diameter. For 1/2-inch x 20-thread shaft. Medium-grit sanding sleeve over expandable rubber drum. Not for use on drill presses.

ORDERING INFORMATION:

9 GT 25246—Shpg. wt. 1 lb. 6 oz. \$4.99

(3) Automatic Carriage Return

CONSTRUCTION: Steel wire returns carriage to rear of arm after cutting. For 10 and 12-in. radial saws (except 9-2945, 9-23161).

ORDERING INFORMATION:

Shipping weight 1 pound 6 ounces.

9 GT 2956 \$15.49

(4) Miter Vise. Double-jaw vise holds molding or frame sections up to 3 inches wide. Ideal for making picture, door or window frames.

CONSTRUCTION: Cast aluminum base, jaws. Steel screws. Holds wood or metal. Fits most radial saws.

ORDERING INFORMATION:

9 GT 3279—Shipping weight 2 pounds \$11.99

(5) Floating Ring Guard.* Protects exposed edge of blade. For former radial saws 9-2933, 9-2934, 9-2941, 9-2943, 9-2944.

ORDERING INFORMATION:

9 GT 29007—Shpg. wt. 1 lb. 7 oz. \$11.49

Floating Ring Guard.* Protects exposed edge of blade. Fits former saws (9-2945, 9-2946).

ORDERING INFORMATION:

9 GT 29008—Shpg. wt. 1 lb. 7 oz. \$11.49

*Meets standards of Occupational Safety and Health Act

(6) Retractable Lower Blade Guard

CONST: Clear-view plastic. Aluminum frame. Fits 10-inch radial saws (9 GT 2311N, 9 GT 2316N, 9 GT 2310N) only.

ORDERING INFORMATION:

9 GT 29009—Shpg. wt. 1 lb. 5 oz. \$12.49

(7) Key Chuck. Converts radial saw into on-the-spot drill or router. . . screw on chuck, insert bits.

CONSTRUCTION: Hardened steel. Nickel-chrome alloy jaws. Keyholes do not extend into body cavity . . . keep dirt out. Takes bits with shanks from 3/4 to 1/2-in. diameter. Chuck fits 1/2x20-thread ends on radial saw. Also includes chuck key for locking and releasing drill and router bits.

ORDERING INFO: For our complete selection of drill and router bits, see pages 4 and 5.

9 GT 2980—Shipping weight 1 pound \$7.99

(8 and 9) CRAFTSMAN Sawdust Collectors. Fits all radial saws we sell, most other popular brand saws. Help keep work area and air clean.

(8) Stationary Collector. High-impact plastic shroud traps sawdust, wood chips, funnels them down chute at bottom of shroud. Just place bag or box beneath to gather debris or, for more complete pick-up, attach to shop vac with 2 1/2-in. diam. hose.

ORDERING INFORMATION:

9 GT 29517C—Shpg. wt. 7 lbs. Kit \$19.99

(9) Adjustable Collector. For more effective dust pick-up than other collectors because it adjusts to the blade angle for operations such as miter, bevel cuts, crosscuts. High-impact plastic, steel; adapters to attach to shop vac with 1 1/2 to 2 1/2-in. diam. hose.

ORDERING INFO: Also for bench-mounted lathe.

9 GT 16998—Shpg. wt. 2 lbs. 1 oz. \$14.99

(10) Rotary Surface Planer. Lets you smooth rough, uneven work surfaces and edges. Also removes paint and varnish, eliminates bows from warped stock.

CONSTRUCTION: Die-cast aluminum body with air-flow design. Three carbide-tipped alloy steel blades plane a smooth 4-inch path that needs little or no sanding. Fits radial saws with 3/8-inch arbors.

ORDER INFO: Not for radial saw (9-2922).

9 GT 29513—Shipping weight 1 pound . . . \$15.99

9 GT 29531—Extra 3-pc. Blade Set. Wt. 5 oz. 5.99

.. see still more accessories on the following 6 pages




CRAFTSMAN® Blade Stabilizers cut vibration, wobble

Use with carbide-tipped blades and most regular blades from 7 to 10 inches in diameter. Helps them cut smoother. Made of quality tempered steel. One side taper-ground, the other flat-ground. Stabilizer measures 4 in. in diameter. Center hole knockout bushed for 3/4 to 1/2-in. arbors. Sold in pkgs. of 2.

ORDER INFO: Wt. 1 lb. 6 oz.

9 GT 4952 Package \$4.49



Sanding Wheels and Discs

10-inch Sanding Wheel. Attaches to table or radial saw. Tempered steel casting. Coarse grit on one side, medium on the other. Fits on arbor like saw blade. Fits 3/4, 1/2-inch arbors.

ORDER INFO: Wt. 3 lbs. 14 oz.

9 GT 22723 \$6.99

8-inch Sanding Wheel. Attaches to table or radial saw. Aluminum casting. One flat side, other 2" taper. Med. grit, both sides. Fits 3/8, 1/2-in. arbors. Removes stock faster with less clogging.

ORDER INFO: Wt. 1 lb. 2 oz.

9 GT 2274 \$4.99

Replacement Sanding Discs for above. 3-in. center hole. Package of six . . . two each of fine, medium, coarse. Use disc cement.

ORDERING INFORMATION:

9 GT 22731—10 in. Wt. 13 oz. . . Ea. Pkg. \$2.19; 5 for \$10.50

9 GT 22732—8 in. Wt. 9 oz. . . Ea. Pkg. 1.39; 5 for 6.50

COMPX LAEGD 111



CRAFTSMAN® Steel Stand and Leg Sets

They provide a solid work platform and reduce power tool vibration, thanks to 18-gauge steel, double-braced construction and rigid motor mounts



For Table Saws, other tools



- (1) Completely assembled Stand for 10 and 12-inch Radial Saws . . incl. 3 drawers and locking front panel.

CABINET: Heavy gauge steel. Charcoal gray enamel finish. Provides proper working height for Craftsman 10 and 12-in. radial saws. Measures 27 $\frac{1}{2}$ x 25 $\frac{1}{2}$ x 32 inches high. Feet adjust for leveling on uneven floors. Convenient storage area beneath drawers provides adequate space for larger tools. Only assembly required is lock and panel after saw is mounted. Includes lock and two keys.

DRAWERS: 3 smooth-sliding drawers, with rust-resistant galvanized slides, keep accessories close at hand. Red enameled drawers 22 $\frac{1}{2}$ x 16 $\frac{3}{4}$ x 4 $\frac{1}{2}$ in. deep. Full-length aluminum drawer pulls.

PANEL: When unlocked, red locking front panel pops out for easy gripping. Slides inside cabinet, out of the way, when opened. Closed, panel covers front of cabinet.

ORDERING INFORMATION:
Shipping weight 115 pounds.
9 GT 22203N \$94.50

- (2) Stands for 8, 9, 10-inch Radial Saws

Fits most Craftsman 8, 9, and 10-inch radial saws.

CONSTRUCTION: Heavy-gauge steel, 24x25x32 $\frac{3}{4}$ inches high. Baked charcoal gray enamel finish. Takes up to 3 drawers. Drawer and locking front panel sold separately below. Leg levelers included. Sent unassembled.

ORDERING INFORMATION:
9 GT 22202L—Shpg. wt. 52 lbs. . . \$44.99

Drawer for (2) (not shown). Heavy-gauge steel. Smooth sliding, rust-resistant galvanized slides. 16 $\frac{1}{2}$ x 15 $\frac{1}{2}$ x 4 $\frac{3}{4}$ inches deep. Red enamel finish with aluminum drawer pulls out easily.

ORDERING INFORMATION:
9 GT 10329—Shpg. wt. 9 lbs. \$9.50

Locking Front Panel for (2) (not shown).
ORDERING INFORMATION:
9 GT 10335C—Shpg. wt. 10 lbs. . . \$11.49

- (3) Legs For CRAFTSMAN Radial Saws Exclusively for all Craftsman radial saws.

CONSTRUCTION: 18-gauge steel. Baked charcoal gray enamel finish. Provides sturdy support and correct working height. Rubber-padded adjustable leveling feet help prevent creeping and marring of floors. Sent unassembled.

ORDERING INFORMATION:
9 GT 22238C—Shpg. wt. 31 lbs. . . \$27.99

(4 and 5) **CONSTRUCTION:** Stamped steel construction. A-frame design . . provides you with an exceptionally sturdy and steady work surface. Stands are adjustable to provide the best overall working heights for their recommended tools. Rubber-padded feet resist creeping and marring of floors. Charcoal gray enamel finish. Includes motor mount.

(4) **For CRAFTSMAN 8, 9, or 10-inch table saws.** Top measures 19 $\frac{1}{2}$ x 15 $\frac{1}{4}$ inches overall. Height adjusts up to 3 $\frac{1}{4}$ inches . . from 23 $\frac{1}{2}$ to 26 $\frac{1}{4}$ in. Sent unassembled.

ORDERING INFORMATION:
Shipping weight 32 pounds.
9 GT 22214C \$32.99

(5) **For CRAFTSMAN 12-in. band saw-sander, wood shaper and belt-disc sander.** Top 19 $\frac{1}{2}$ x 15 $\frac{1}{4}$ in. Height adjusts from 27 $\frac{1}{2}$ to 30 $\frac{1}{2}$ in. Unit sent unassembled.

ORDERING INFORMATION:
Shipping weight 37 pounds.
9 GT 22213C \$34.99

(6) **CONSTRUCTION:** Heavy 18-gauge steel provides sturdy support and proper working heights. Rubber adjustable leveling feet for uneven floors . . resist creeping and marring of floors. Sent unassembled.

ORDERING INFORMATION: Each leg set fits only the Craftsman power tool it is listed under.

For all CRAFTSMAN 9, 10-inch Table Saws.
Shipping weight 21 pounds.
9 GT 22235C Set \$27.99

For CRAFTSMAN Band Saws, Shaper, Sander.
Shipping weight 27 pounds.
9 GT 22236C Set \$31.99


For CRAFTSMAN 7 $\frac{1}{2}$ -inch Table Saw.
Shipping weight 21 pounds.
9 GT 22237C Set \$27.99

- (7) Jointer-Planer Floor Stand

Like all of our famous brand tools for the past 50 years, it had to earn the right to wear the Craftsman name.

CONSTRUCTION: Heavy-duty 18-gauge steel. Double-braced for added stability. Provides steady support at proper working height. Top measures 37 $\frac{1}{2}$ x 15 $\frac{1}{4}$ -inches wide. Leveling feet with rubber pads resist creeping and marring of floors. Includes motor mount. Sent unassembled.

ORDERING INFORMATION: See "N" suffix note on page 92.
9 GT 22216N—Shpg. wt. 92 lbs. . . \$34.99



- (8) Casters for Power tool Stands, Cabinets

CONSTRUCTION: Heavy duty. Can support up to 400 lbs. Set incl. 2 adjustable 2 $\frac{1}{2}$ -in. front swivel wheels with T-handles for adjustments. Also incl. two 3-in. non-swivel wheels for the rear. Both made of extra strong phenolic plastic. For stands shown on this page, and most stands having 5° or 10° slanted or straight sides. Outside mounting.

ORDER INFO: Wt. 6 lbs. 8 oz.
9 GT 22201 Set \$19.50

(9) Casters for leg sets—inside mounting only.
ORDER INFO: Wt. 6 lbs. 5 oz.
9 GT 22209 Set \$19.50

Versatile Work Lights . . . mount on benches, tools, walls, and stands



- (10) 34-in. Work Light with Spring-tension control Angle holds where you put it.

CONSTRUCTION: Aluminum vented shade helps keep light from over-heating. Shade distributes light without creating shadows. 34-in. heavy gauge steel arm stays put due to spring tension control. **MOUNTINGS:** Clamp-on and wall-type included.

FINISH: Outside finished in electrostatically applied, oven-baked enamel . . scratch resistant. Inside of shade coated with dull gloss enamel reflector paint . . will not yellow. **ELEC. INFO:** Use maximum 60-w. bulb. 110-120 v. On/off switch on top of shade. 6-ft. cord. UL listed. **ORDER INFO:** Wt. 3 lbs. 10 oz.
9 GT 2488 \$19.99

- (11) Work Light with 18-inch Flexible Neck Mounting lamp right on the machine provides the best light for tool operation.

CONSTRUCTION: Vented shade . . inner shield keeps it cool outside. 18-inch neck is flexible . . direct light exactly where you need it with one hand. **ACCESSORIES:** Mounting brackets. Bulb not included. **ELEC. INFO:** Use max. 60 w. bulb. 110-120 v. On/off switch. 6-ft. cord. UL listed. **ORDER INFO:** Wt. 2 lbs. 12 oz.
9 GT 2480 \$12.99

As above, but 24-in. neck.
Shipping weight 2 lbs. 12 oz.
9 GT 2481 \$15.99

Dial the groove width you want from 1/4 to 3/16 inch with this

CRAFTSMAN® Adjustable Dado

with Carbide Tips for extra-smooth cuts

16 teeth \$39.99 8 teeth \$32.99

(1 and 2) Precision-cut, adjustable hub lets you dial width without removing dado.

USES: Use both to plough, dado, lap, joint, groove, and rabbet. Cross cut all hard and soft woods. For use on Formica® laminated plastic, other laminates and sensitive materials. For use on 9, 10, 12, and 14-in. radial or table saws only*.

CONSTRUCTION: 7-in. tempered tool-steel blade. Carbide-tipped teeth. 3/4-in. hole; 5/8-in. bushing.

(1) 16 teeth. For smoother cuts.

CUTTING CAPACITY: Widths from 1/4 to 3/16-in. Maximum depth 1 1/2 inches.

ORDERING INFORMATION:

Shipping weight 2 lbs. 10 oz. 9 GT 3263.....\$39.99

(2) With 8 teeth.

CUTTING CAPACITY: Cuts widths from 1/4 to 3/16-in. Maximum depth 2 in.

ORDERING INFORMATION:

9 GT 3267—Wt. 2 lbs. 12 oz. \$32.99

*Not for use on 7 1/2-in. table saw, former 8-in. radial saw 9-2922 or any radial with universal motor.

CRAFTSMAN® Dado Sets with Kromedge® Blades—precision ground for accuracy

(3 and 4) The Kromedge® blades on these sets are rust-resistant for long life; precision ground; heat-tempered and treated—stay sharp many times longer than ordinary steel blades. Teeth expertly precision-sharpened. Blade and chippers matched together... provides smooth, precise cuts. Dado inserts sold separately on pages 110, 134, 135.

(3) Our best professional-quality satin-cut Dado Sets

USES: Cut fine veneers, other sensitive materials with little or no splintering... give straight even sides. Also for plywood.

CONSTRUCTION: Kromedge® steel. Outside cutters taper-ground for proper clearance, accurate alignment.

SET COMPOSITION: Two 1/8-in. outside cutters, four 1/8-in. chippers, one 1/8-in. chipper.

CUTTING CAPACITY: Dadoes to 1 1/4 in. deep. Max. width of cut is 1 1/16 in. Fits 5/8-in. arbor.

SIZES AND ORDERING INFORMATION:

7-inch Set. Wt. 4 lbs. 12 oz.

9 GT 3257.....Set \$34.99

8-inch Set. Wt. 5 lbs. 8 oz.

9 GT 3253.....Set \$39.99

6-inch Set for radial and table saws (not shown). 4 inside chippers 1/8-in. thick, one 1/16-in. thick. Two 1/8-in. thick outside cutters, 4 paper washers. Max. width of cut is 1 1/16 in. Instruction booklet incl.

ORDERING INFORMATION:

9 GT 3248—Fits 1/2-in. round arbor. Wt. 3 lbs. 2 oz. Set \$19.99

9 GT 3249—Fits 5/8-in. round arbor. Wt. 3 lbs. 4 oz. Set \$19.99

CRAFTSMAN® Dado Set for Electric Hand Saws \$11.99

(5) 3 3/4-inch Set.



CONSTRUCTION: Kromedge® steel blades. SET COMPOSITION: Two 1/8-inch chippers, one 1/16-inch chipper. Two 1/8-inch outside cutters. Incl. mounting hardware.

CUTTING CAPACITY: Width of cut 3/16 inch. Maximum depth of cut 3/16 inch.

ORDERING INFO: Fits all CRAFTSMAN circular saws except 9-1187C, 9-1188C.

Shipping weight 1 lb. 8 oz.

9 GT 3268.....Set \$11.99

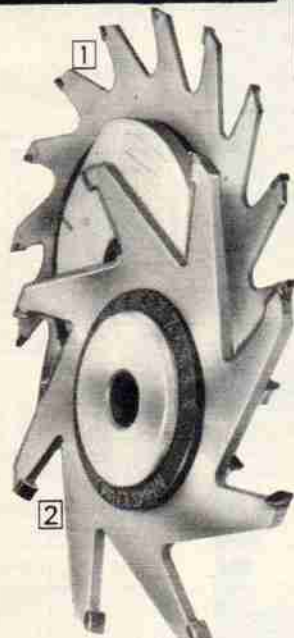

CRAFTSMAN® Molding Heads with Kromedge® Bits

for table and radial saws

15-pc. Set \$26.99 7-in. diam.
21-pc. Set \$24.99 4 3/4-in. diam.
27-pc. Set \$36.99 7-in. diam.

Enough bit sets available to make 20 decorative cuts on your radial or table saw... or use these same bits in any combination you like to create hundreds of other interesting designs.

For use with table and radial saws. Do many woodworking cuts and operations normally requiring a shaper.

7-inch diameter, 15-piece Set.

SET COMPOSITION: 12 bits (four 3-pc. sets: A, D, E, F at left), triple-cutter head, spacer-washer, bushings and instruction booklet.

CONSTRUCTION: Kromedge® steel. 7-in. diameter.

ORDERING INFO: For 9, 10, 12 in. direct drive radial or belt driven table saws. Fits 3/4 or 5/8-in. round arbors. 9 GT 3218—Shpg. wt. 3 lbs. 5 oz. Set \$26.99

4 3/4-inch diameter, 21-piece Set.

SET COMPOSITION: 18 bits (Six 3-pc. sets: A thru F at right). Triple-cutter head, spacer-washer, bushings.

CONSTRUCTION: Kromedge® steel. 4 3/4-in. diameter.

ORDERING INFORMATION: For 8, 9, 10-inch belt driven table saws. Fits 1/4, 3/8 or 1/2-inch round arbors. Not for 7 1/2-in. table saw or former 8-in. radial saw 9-2922. 9 GT 3221—Shpg. wt. 2 lbs. 4 oz. Set \$24.99

7-inch diameter, 27-piece Set.

SET COMPOSITION: 24 bits (Eight 3-pc. sets: A thru H at right). Triple-cutter head, spacer-washer, bushings and instructions.

CONSTRUCTION: Kromedge® steel. 7-in. diameter.

ORDERING INFORMATION: For 9, 10, 12-in. radial, or 12 in. table saws. Fits 3/4 or 5/8-in. round arbors.

9 GT 3217—Shpg. wt. 4 lbs. 3 oz. Set \$36.99

Triple cutter-head alone.


CONSTRUCTION: Steel. 7-inch diameter. No bits incl.

ORDERING INFORMATION: For use with Kromedge® bit sets sold below.

9 GT 3214—Shpg. wt. 2 lbs. 10 oz. Set \$9.99

Kromedge® Cutter-bit Sets. Tool steel. 3 bits in each set.

illus.	Catalog Number	Type of Cut (All bits 1 inch wide)	Wt. oz.	Set
(A)	9GT2353	Cabinet Door Lip	4	\$3.99
(B)	9GT2355	Base Molding	4	3.99
(C)	9GT3201	Glue Joint	5	3.99
(D)	9GT2352	3 bead (1/4 inch each)	5	3.99
(E)	9GT3212	3/16-inch Cove and Bead	5	3.99
(F)	9GT2302	1-inch Planer and Joiner	5	3.99
(G)	9GT3211	Window Sash	5	3.99
(H)	9GT3204	90° Vee Groove	4	3.99
(J)	9GT2351	1/4-inch and 1/2-inch Quarter Round	5	3.99
(K)	9GT3206	1-inch Flute (1/2-inch radius)	5	3.99
(L)	9GT3207	3/4-inch Quarter Round	5	3.99
(M)	9GT3208	3/4-inch Cove (Drop Leaf)	5	3.99
(N)	9GT3254	3/16-in. 3/8-in. Quarter Round; 1/4-in. Bead	4	3.99
(P)	9GT3202	Clover Leaf and Screen Mold	4	3.99
(R)	9GT3203	"Ogee" Window and Door Stop	4	3.99
(S)	9GT3209	1/4-inch Flute and 1/2-inch Cove	4	3.99
(T)	9GT3210	3/8-inch Cove	4	3.99
(V)	9GT3213	Panel Cupboard Door	5	3.99
(W)	9GT3203	Cupboard Door Rail End	5	3.99
		Tongue-Groove. Has 6 bits	7	7.99

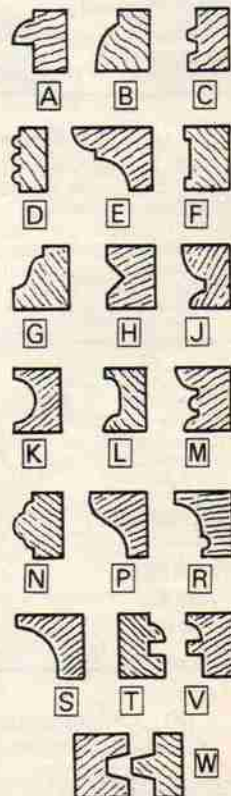

Single-cutter Molding Head... 21-pc. Bit Set cuts all patterns shown above except (G) and (V)... 17 in all. 6

(6) 21-piece Set. Bits can't turn in cutter head... you get precision alignment.

SET COMPOSITION: Includes 17 single Kromedge® bits, cutter head, wrench, spacer-washer, bushing, instruction booklet, plastic case. Set includes molding head.

CONSTRUCTION: Kromedge® steel. 5 3/8-in. cutting diameter.

ORDERING INFORMATION: For table or radial saws up to 10-in. Not for use on former 8-in. radial 9-2922.

9 GT 3215—Shpg. wt. 3 lbs. Set \$34.99



COMPK LAEGJO Sears 113

CRAFTSMAN® Kromedge® Blades

They stay sharp longer than our ordinary blades because blade bodies are fortified with chrome-nickel-molybdenum steel... an alloy specially selected for its ability to stay tough and to hold a keen cutting edge



KROMEDGE®

Hollow Ground 1

(1) Hollow-ground Planer Blade

USES: Cuts smooth for little sanding before gluing joints. For fine-finish rips, crosscuts, miters in hard and soft woods, plywood, furniture stock.

CONSTRUCTION: Made of chrome-nickel-molybdenum steel. Deep hollow-ground design helps blade run true.



KROMEDGE®

(2) Master Combination Blade

USES: Mitters, crosscuts in hard and soft woods; rips in all dry wood, furniture stock.

CONSTRUCTION: Chrome-nickel-molybdenum steel. Teeth set for fast, precise, smooth cutting. Deep expansion slots help blade run true.



KROMEDGE®

(3) Rip Blade

USES: For ripping (with the grain) in all woods. Also an excellent blade for re-sawing.

CONSTRUCTION: Made of chrome-nickel-molybdenum steel. With extra-deep gullets that sweep sawdust out. Deep expansion slots help blade run true.




KROMEDGE®

Thin Rim Spline Cut Veneer

(4) Plywood and Veneer Blade

USES: For cutting laminates, plastics, veneers, plywood, other sensitive materials. Maximum cut 1 1/4-inch.

CONSTRUCTION: Made of chrome-nickel-molybdenum steel. With taper-ground rim for precise, smooth cuts. Teeth need no setting.



KROMEDGE®

Chisel Tooth
CAT. NO. 932065

(5) Chisel-tooth Combination Blade

USES: All-purpose crosscuts, miters, rips in hard and soft wood.

CONSTRUCTION: Chrome-nickel-molybdenum steel. Flat top ground. With taper-ground rim for precise, smooth cuts.



KROMEDGE®

2 1/4" Thick

(6) Crosscut Plywood Blade

USES: For all-purpose crosscutting in Celotex® fiberboard woods and veneers. For use with electric hand, table and radial saws.

CONSTRUCTION: Made of chrome-nickel-molybdenum steel. Flat top ground.

(1) Hollow-ground Planer Blade

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Sec. Teeth	Total Teeth	Center Hole, in.	Max. RPM	Wt. each lbs. oz.	Price Each	Two for
9 GT 32427	12	19	76	3/4-5/8"	3500	2 12	\$14.99	\$26.98
9 GT 32428	10	16	64	3/4-5/8"	4200	1 11	11.99	21.58
9 GT 32425	9	14	56	3/4-5/8"	4600	1 7	8.99	16.18
9 GT 32424	8	12	48	3/4-5/8"	5200	1	6.99	12.58
9 GT 32423	7 1/4	12	48	3/4-5/8"	5700	13	6.49	11.88
9 GT 32422	7	11	44	3/4-5/8"	6000	12	6.49	11.88
9 GT 32429	6 1/2	10	40	3/4-5/8"	6400	11	5.99	10.70

(2) Master Combination Blade

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Sec. Teeth	Total Teeth	Center Hole, in.	Max. RPM	Wt. each lbs. oz.	Price Each	Two for
9 GT 32499	12	18	72	3/4-5/8"	3500	3 2	\$8.99	\$18.18
9 GT 32498	10	16	64	3/4-5/8"	4200	1 12	5.99	10.78
9 GT 32497	9	16	64	3/4-5/8"	4600	1 15	4.99	8.98
9 GT 32496	8	12	48	3/4-5/8"	5200	1	3.99	7.18
9 GT 32495	7 1/4	15	60	3/4-5/8"	5600	14	3.99	7.18
9 GT 32494	7 1/4	15	60	3/4-5/8"	5700	14	3.99	7.18
9 GT 32493	7	12	48	3/4-5/8"	6000	11	3.49	6.28
9 GT 32492	6 1/2	12	48	3/4-5/8"	6400	10	3.29	5.92

(3) Rip Blade

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Wt. each lbs. oz.	Price Each	Two for
9 GT 32567	10	36	3/4-5/8"	4200	1 12	\$5.99	\$10.78
9 GT 32566	9	36	3/4-5/8"	4600	1 7	4.99	8.98
9 GT 32564	7 1/4	30	3/4-5/8"	5700	14	3.69	6.64
9 GT 32563	7	30	3/4-5/8"	6000	11	3.49	6.28
9 GT 32562	6 1/2	30	3/4-5/8"	6400	10	3.29	5.92

(4) Plywood and Veneer Blade

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Wt. each lbs. oz.	Price Each	Two for
9 GT 32539	10	200	3/4-5/8"	4200	1 13	\$12.99	\$23.38
9 GT 32538	9	200	3/4-5/8"	4600	1 10	9.99	17.98
9 GT 32537	8	176	3/4-5/8"	5200	1 3	7.99	14.38
9 GT 32534	7	200	3/4-5/8"	6000	15	6.69	12.04
9 GT 32532	6 1/2	150	3/4-5/8"	6400	12	6.29	11.32

(5) Chisel-tooth Combination Blade

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Wt. each lbs. oz.	Price Each	Two for
9 GT 32702	12	24 1/2	3/4-5/8"	3500	2 15	\$7.99	\$14.38
9 GT 32668	10	28	3/4-5/8"	4200	1 13	4.99	8.98
9 GT 32667	9	28	3/4-5/8"	4600	1 8	4.49	8.08
9 GT 32666	8	28	3/4-5/8"	5200	1 2	3.99	7.18
9 GT 32665	7 1/4	26	3/4-5/8"	5600	15	3.79	6.82
9 GT 32664	7 1/4	26	3/4-5/8"	5700	14	3.29	5.92
9 GT 32669	7	26	3/4-5/8"	6000	15	3.19	5.74
9 GT 32663	6 1/2	24	3/4-5/8"	6400	11	2.99	5.38

*This blade best suited for heavy-duty ripping.

(6) Crosscut Plywood Blade

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Teeth	Center Hole, in.	Maximum RPM	Wt. each lbs. oz.	Price Each	Two for
9 GT 32451	12	200	3/4-5/8"	3500	3	\$8.99	\$16.18
9 GT 32446	10	200	3/4-5/8"	4200	1 12	5.99	10.78
9 GT 32448	9	200	3/4-5/8"	4600	1 8	4.99	8.98
9 GT 32447	8	176	3/4-5/8"	5200	1 2	3.99	7.18
9 GT 32449	7 1/4	200	3/4-5/8"	5600	14	3.99	7.18
9 GT 32444	7 1/4	200	3/4-5/8"	5700	14	3.69	6.84
9 GT 32445	7	200	3/4-5/8"	6000	13	3.49	6.28
9 GT 32442	6 1/2	150	3/4-5/8"	6400	10	3.29	5.92

*Center hole knockout bushed for arbor sizes listed

Save 15% when you buy 3-pc. Blade Pack

BLADE PACK INCLUDES:

One blade each: Master Combination (2), Chisel-tooth Combination (5), Crosscut Plywood (6).

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Shpg. wt. lbs. oz.	Separate prices total	Blade Pack price
9 GT 32351	12	9	\$25.97	\$22.07
9 GT 32352	10	5	16.97	14.42
9 GT 32353	9	4	14.47	12.29
9 GT 32354	8	3	11.97	10.17
9 GT 32355	7 1/4	1	10.67	9.06
9 GT 32356	7 1/4	2	10.17	8.64
9 GT 32357	7	2	9.57	8.13
9 GT 32358	6 1/2	1		

(8) Sears Fine-tooth Disposable Framing Blades. For smoother framing cuts on timber, 2x4's, etc.

CONSTRUCTION: Tempered 17-gauge steel bodies, 5/8-in. center hole. SIZES AND ORDERING INFORMATION: Not Craftsman.

With 6 1/2-inch diameter. 150 teeth. Wt. each 12 oz.

9 GT 32435 Each \$2.49; 5 for \$11.90; 40 for \$84.80

With 7-inch diameter. 200 teeth. Wt. each 13 oz.

9 GT 32436 Each \$2.49; 5 for \$11.90; 40 for \$84.80

With 7 1/4-inch diameter. 200 teeth. Wt. each 15 oz.

9 GT 32437 Each \$2.49; 5 for \$11.90; 40 for \$84.80

(7) Sears Coarse-tooth Disposable Framing Blades. For fast rip framing cuts on timber, 2x4's, etc.

CONSTRUCTION: Tempered 17-gauge steel bodies, 5/8-in. center hole. SIZES AND ORDERING INFORMATION: Not Craftsman.

With 6 1/2-inch diameter. 24 teeth. Wt. each 11 oz.

9 GT 32612 Each \$1.99; 5 for \$9.45; 40 for \$74.80

With 7-inch diameter. 26 teeth. Wt. each 15 oz.

9 GT 32612 Each \$1.99; 5 for \$9.45; 40 for \$74.80

With 7 1/4-inch diameter. 24 teeth. Wt. each 14 oz.

9 GT 32712 Each \$1.99; 5 for \$9.45; 40 for \$74.80

TUNGSTEN CARBIDE-TIPPED BLADES

Like all of our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN®

Here's what makes these Blades so outstanding . . .

- "Sears Best" means they're the finest blades we can offer
- Bodies are made of tough, tempered Kromedge® steel
- Blades are finely balanced to provide true run out
- Chrome-nickel, then chrome-plated to resist rust, gum, and pitch build-up
- Blade teeth are finely milled; carbide tips are cobalt-bonded
- Each tip is individually brazed onto the blade, then diamond-ground for a keen cutting edge
- The result: Carbide-tipped Blades stay sharp, last more than 5 times longer than any other blades you can buy



(1) Blade with flat, top-ground tips. A more controlled cut than with non-tipped blades . . . each tip projects only .020/.050-in. above the non-cutting edge, taking small, equal bites.

USES: General-purpose woodworking . . . rips, crosscuts, miters, bevels (both regular and finish cuts). Regular cuts in Masonite® brand hardboard, Formica® plastic laminate, other laminated plastics, asbestos wallboard, soft metals like aluminum and brass. *Not for ferrous metals or masonry.*

CONSTRUCTION: Kromedge® steel blade bodies, tungsten-carbide tips.

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 GT 32465	6½	8	6400	⅜-1½*	1 5	\$9.99
9 GT 32461	7	8	6000	⅜-1½*	1 7	10.49
9 GT 32481	7½	14	6000	⅜-1½*	1 14	14.99
9 GT 32483	7½	8	5700	⅜-1½*	1 4	10.99
9 GT 32484	8	12	5200	⅜-1½*	1 10	12.99
9 GT 32485	9	12	4600	⅜-1½*	2 4	12.99
9 GT 32486	10	12	4200	⅜-1½*	2 11	17.99
9 GT 32469	12	12	3500	⅜-1½*	3 4	22.99

*Round, center-hole knockout bushed for arbor sizes listed.

**Excellent for cutting through nails in floorboards.

(2) Blades with 24 alternately bevel-ground tips for fast cutting and ripping. Means smooth, almost splinter-free cuts, taking even smaller bites than (1) above. All-purpose, durable blade for contractors and home craftsmen.

USES: Rips, crosscuts, miters, bevels. Cuts all woods, plywood, chipboard, Masonite® brand hardboard, asbestos wallboard, plastic. *Not for use on ferrous metals or masonry.*

CONSTRUCTION: Kromedge® steel blade bodies, tungsten-carbide tips.

SIZES AND ORDERING INFORMATION:

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 GT 32487	6½	24	6700	⅜-1½*	1 15	\$12.99
9 GT 32488	7	24	6000	⅜-1½*	1 1	13.99
9 GT 32489	7½	24	5700	⅜-1½*	1 3	14.99
9 GT 32476	10	24	4200	⅜-1½*	2 10	23.99
9 GT 32477	12	24	3500	⅜-1½*	3 11	29.99

(3) Blades with alternately bevel-ground tips for smooth crosscutting and trimming. Teeth take small bites to produce fine-finish, almost splinter-free cuts.

USES: Rips, crosscuts, miters, bevels. Cuts all woods, laminates, plastics, Formica® plastic laminate, Masonite® brand hardboard, Transite® asbestos products, other materials. *Not for use on ferrous metals or masonry.*

CONSTRUCTION: Kromedge® steel blade bodies, tungsten-carbide tips. Expansion slots guard against warping, heat distortion.

SIZES AND ORDER INFO: Use 8-in. for 9-in. saws.

Catalog Number	Diam. in.	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 GT 32559	8	40	5200	⅜-1½*	1 12	\$24.99
9 GT 3255	10	40	4200	⅜-1½*	2 12	29.99
9 GT 32555	12	48	3500	⅜-1½*	3 10	39.99

10-inch Blade with 48 alternately bevel-ground tips. As above except triple-ground to produce even smoother, more satin-like cuts.

USES: Rips, crosscuts, miters, bevels. Cuts all woods plus metals like aluminum, brass, copper, zinc. *Not for ferrous metals or masonry.*

ORDER INFO: For 10-in. or larger saws.

9 GT 3250—Shpg. wt. 2 lbs. 12 oz. \$34.99

(4) 10-inch Blade with 60 alternately bevel-ground tips. Designed to cut thin but brittle materials that normally give even skilled craftsmen trouble. Thin-rimmed, alternately beveled and triple-ground tips provide you with the smoothest, most satin-like cuts of any blade we offer. Produces a fine, narrow kerf.

USES: Rips, crosscuts, miters, bevels. Ideal for plywood, veneers, plastics. Fits ⅜ or ⅝-in. arbors. Maximum cutting depth 1½-in. Maximum rpm 4200. *Not for ferrous metals or masonry.*

CONSTRUCTION: Kromedge® steel blade body, tungsten-carbide tips. Expansion slots guard against warping, heat distortion.

ORDERING INFORMATION:

9 GT 32428—Shpg. wt. 2 lbs. 10 oz. \$39.99

(4) Ten-inch Blade with 60 Carbide Tips

Produces the smoothest, most satin-like cuts of any blade we offer . . . excellent for thin but brittle materials such as laminates, plastics or hardboard



Close-up view of plywood cut with regular non-tipped Kromedge® blade

Close-up view of plywood cut with this carbide-tipped, 60-tooth Blade

Sears Flat Top-ground Carbide-tipped Blades

USES: Recommended for rough work where blade can be easily damaged and finest blades are not needed. Good for general-purpose woodworking . . . rips, crosscuts, miters, bevels (regular and finish cuts). Also for regular cuts in Masonite® brand hardboard, Formica® plastic laminate, other plastic laminates, asbestos wallboard, soft metals like aluminum, brass. *Not for use on power-fed industrial machines, ferrous metals or masonry.*

CONSTRUCTION: Steel blade bodies with tungsten-carbide tips.

SIZES AND ORDERING INFORMATION:

Catalog Number	Diameter inches	Teeth	Max. RPM	Center Hole in.	Shpg. wt. lbs. oz.	Price
9 GT 32462	6½	8	6400	⅜-1½*	1 1	\$5.99
9 GT 32463	7	8	6000	⅜-1½*	1 1	5.99
9 GT 32464	7½	8	5700	⅜-1½*	1 3	5.99
9 GT 32478	8	8	5200	⅜-1½*	1 6	6.99
9 GT 32479	10	8	4200	⅜-1½*	2 14	7.99

*Round, center-hole knockout bushed for arbor sizes listed.

OUR MOST POWERFUL HOME-N-SHOP WET/DRY VAC

Like all our finest quality hardware needs,
it had to earn the right to wear the name

CRAFTSMAN[®]

Here's what makes this
vac so outstanding . . . in actual tests*
under lab conditions, it produced these results

SAWDUST TEST: Picked up 1/2 bushel of fine, dry sawdust in an average of 6.8 seconds

GRAVEL TEST: Picked up an average of 44 lbs. of gravel (3/4-in. average diameter) in 30 seconds

NAILS TEST: Picked up an average of about 1600 (5.9 lbs.) 1/4-in. roofing nails in 15 seconds

WATER TEST: Picked up 1 gallon of standing water in less than 1 second (average of .82 sec.)

And, here are just 3 of the design features
that help give this vac its pick-up power

High-efficiency Blower Wheel coupled with ball bearing motor provides high speed air flow through vac . . . you get high air velocity for fast pick-up of both dry debris and liquids.

Neoprene foam-rubber Lid Gasket maintains its original shape after numerous sealings . . . tank lid maintains seal against power robbing leaks, gives high velocity air flow through air intake port.

Patented Bleed-off Air Vents in addition to large air discharge port, let extra air out of tank. Helps keep back pressure inside vac at a minimum to maintain high velocity air flow.

MOTOR: Sealed ball bearings for quiet operation and long life. Suction automatically shuts off when tank is full during wet pick-ups. Motor also provides blower action when hose is placed in the exhaust port. On-off power switch on motor.

FILTER: Permanent type paper filter cartridge removes for cleaning . . . stays in place in vac during both wet and dry pick-ups.

ACCESSORIES: Includes one 6-ft., 2 1/2-in. diameter hose and rectangular utility nozzle for general clean-ups. Additional 2 1/2 and 1 1/4-in. diameter accessories sold separately on page 117.

ELECTRICAL INFO: Double insulated . . . uses standard two prong outlet, never needs grounding. 110-120-v., 60-Hz., AC. 1300 w. 2-wire, 16-ft. cord. UL listed.

(1) 16 gallon size tank holds 1.8 bushels of dry debris or 13 gallons of liquids

(2) 45 gallon tank size holds 4.25 bushels of dry debris or 38 gallons of liquids

TANK: Red, high impact polypropylene plastic . . . won't rust or dent. Black steel lid, red plastic motor housing. Lid snaps off for dumping dry debris. Neoprene foam-rubber lid gasket maintains its original shape even after numerous sealings. Side mounted drain plug for emptying liquids. 28 1/4-in. high, 22 1/2-in. in diam. Rolls on 4 casters.

TANK: Gray, hi-density Permanex[®] plastic . . . won't rust or dent. Black steel lid with red plastic motor housing. Lid snaps off for emptying dry debris. Neoprene foam-rubber lid gasket maintains original shape even after numerous sealings. Side mounted drain plug for emptying liquids. Stands 43 1/4-in. high, 26 1/4-in. diam. Tank rolls on 4 casters.

ORDERING INFO: See "N" suffix note on page 92 and warranty below.
9 GT 1787N—Wt. 35 lbs. . . \$109.00

ORDERING INFO: See "N" suffix note on page 92 and warranty below.
9 GT 1788N—Wt. 54 lbs. . . \$149.00

16-gallon tank size
\$109.00

Vac comes with 2 1/2-inch diam. hose, utility nozzle and caster assembly. Order adapter (7) on page 117 to use 1 1/4-inch diameter accessories

45-gallon tank size
\$149.00

Over twice the capacity of our 16 gallon tank size. Perfect for industrial applications of picking up metal chips, filings, liquid spills on workshop floors or really big messes around home

8-gallon Wet/Dry Vac holds 1/2 bushel dry debris or 5 gallons of liquid

\$69.00

Vac comes with 1 1/4-in. diameter hose and rectangular utility nozzle, casters and adapter for using 1 1/4 or 2 1/2 inch diameter accessories sold on page 117.

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details

In actual tests*, this 8-gallon vac picked up 1/2 bushel of fine, dry sawdust in an average of 26.7 secs.; an average of 9 lbs. 2 oz. of gravel (3/4-in. average diam.) in 30 secs.; an average of about 700 (2 lbs. 1 oz.) 1/4-in. roofing nails in 15 secs.; one gallon of standing water in an average of 4.04 secs.

MOTOR: Sealed ball bearings for quiet operation and long life. High efficiency blower wheel, patented bleed off air vents for high velocity air flow and pick-up power. Unit converts to blower action by placing hose in exhaust port. Suction shuts off when tank is full during wet pick-ups. On-off switch and wrap around cord storage arm on motor housing.

FILTER: Permanent-type paper filter cartridge removes for cleaning. Stays in place in vac during both wet and dry pick-ups.

TANK: Muted green plastic with light green lid. Lid snaps off for emptying contents. Neoprene foam rubber lid gasket maintains original shape. Tank is 25-in. high, 21-in. diam. Rolls on 4 casters.

ACCESSORIES: Includes adapter for using 1 1/4-in. accessories, 6-foot 1 1/4-in. diam. hose, rectangular utility nozzle. Also uses 2 1/2-inch diameter accessories sold separately on page 117.

ELECTRICAL INFORMATION: 110-120 volt, 60-Hz. AC. 900-watts. 16-ft., 3-wire cord. UL listed.

ORDERING INFORMATION: See warranty below.
9 GT 17885L—Shipping weight 23 pounds . . . \$69.00

Six piece Outfit. Includes vac above plus 1 1/4-inch accessories (11) and (14) on page 117.
9 GT 17887L3—Shipping weight 26 pounds . . . \$72.00

CRAFTSMAN HOME-N-SHOP VAC FULL ONE-YEAR WARRANTY

If, within one year from date of purchase, any CRAFTSMAN Home-N-Shop Vac fails due to a defect in material or workmanship, we will repair it free of charge. This warranty service is available by simply returning the Craftsman Home-N-Shop vac to any Sears store or service center throughout the United States.

*Tests witnessed by Nationwide Consumer Testing Institute

Accessories for Home-N-Shop Vacs



2 1/2-in. diameter Accessories

Best for picking up bulky debris such as woodchips

(1) **Extension Handle.** Two piece plastic tube. Measures 46 inches long when assembled.
9 GT 16964—Wt. 1 lb. 10 oz.\$5.95

(2) **3-pc. Attachment Set.** Includes plastic crevice tool, round soft bristle brush and blower nozzle.
9 GT 16973—Wt. 1 lb. 4 oz.Set \$5.99

(3) **Flexible Hose.** Plastic, 6-foot long. Wire reinforced. Connector for joining 2 hoses included.
9 GT 17818C—Wt. 3 lbs.\$7.95

(4) **Auto Attachment.** Plastic. For cleaning auto trunks and interiors.
9 GT 16978—Wt. 8 oz.\$3.29

(5) **Wet Nozzle.** Plastic body with rubber squeegee insert. 14 inches wide.
9 GT 17817—Wt. 1 lb. 4 oz.\$6.95

(6) **Dry Nozzle.** Plastic body with brush and end rollers. 14 inches wide.
9 GT 16925—Wt. 1 lb. 3 oz.\$6.49

(7) **Adapter.** Lets you use 1 1/4-in. accessories at right with vacs designed for 2 1/2-in. diameter accessories.
9 GT 16976—Wt. 4 oz.\$1.49

Attachment Kit. Separate prices total \$26.38

Includes (1), (2), (3) and (6) above.
9 GT 16975C—Wt. 6 lbs.Kit \$24.95

1 1/4-in. diam. Accessories

Concentrated suction for fast liquid pick-ups

(8) **Auto Attachment.** Plastic.
9 GT 17868—Wt. 5 oz.\$2.49

(9) **Utility Nozzle.** Plastic body measures 5-inches wide.
9 GT 17867—Wt. 7 oz.\$2.29

(10) **Flexible Hose.** Vinyl, 6 foot long. Wire reinforced.
9 GT 17866—1 lb. 12 oz.\$6.49

(11) **Wet Nozzle.** Plastic body with rubber squeegee insert. 14-in. wide.
9 GT 17865—Wt. 1 lb. 2 oz.\$6.49

(12) **Dry Nozzle.** Plastic body with brush and end rollers. 14-in. wide.
9 GT 17864—Wt. 1 lb. 1 oz.\$5.95

(13) **Crevice Tool.** Plastic body measures 9 inches long.
9 GT 17863—Wt. 5 oz.\$1.99

(14) **Extension Handle.** Two-piece plastic tube measures 38 inches long when assembled.
9 GT 17861—Wt. 1 lb. 1 oz.\$4.95

(15) **Brush Attachment.** Round plastic body with soft bristles. 2-in. diameter.
9 GT 17862—Wt. 6 oz.\$2.49

Attachment Kit. Separate prices total \$21.87

Includes (11) thru (15) above.
9 GT 17869—Wt. 3 lbs. 5 oz.Kit \$19.95

Replacement Vac Filters

(16) Washable Wet/Dry Cartridge Filter.

Permanent type . . . just remove, rinse and replace. Made of styrene, rubber and phenolic impregnated paper. Replaces filter in vacs on page 116 . . . cloth and paper filter bags in former 9-17821, 9-1785, 9-17831. Use one filter per motor.

ORDERING INFORMATION:
9 GT 17808—Wt. 1 lb. 11 oz.\$6.49

(17) **Cartridge Filter.** As (16) above but fits vac below, former vacs 9-1780, 9-1690, 9-1781.

ORDERING INFORMATION:
9 GT 17807—Wt. 1 lb. 8 oz.\$5.95

(18) Cloth Filter Bag.

Fits vacs 9-17821, 9-1785, 9-1831 only. Use with paper filter bags (19) sold below.

ORDERING INFO:
Shpg. wt. 4 oz.
9 GT 16967 . . . Ea. \$2.49

(19) Paper filter Bags.

Use over cloth filter bag (18) sold above. Sent in package of 5 bags.

ORDERING INFO:
Shpg. wt. 4 oz.
9 GT 16946 . . . Pkg. \$1.99



CRAFTSMAN® Home-N-Shop Dry Pick-up \$34.00

Vac holds 1/4 bushel of dry debris

MOTOR: Sealed ball bearing type
FILTER: Cloth and paper bag type . . . replacement cartridge type (17) sold above.

TANK CAPACITY: Dry pick-up only . . . 8 gallon tank holds 1/4 bushel of dry debris. Gold-color polypropylene plastic. Hinged lift-off steel lid with plastic cover and handle. Stands 14 1/4 inches high, 15 inches in diameter. Rolls on 4 snap in casters.

ACCESSORIES: Uses 2 1/2-in. diameter accessories. Includes adapter to use 1 1/4-in. diameter accessories and 1 1/4-in. diameter 6-foot hose and utility nozzle.

ELECTRICAL INFORMATION: 110-120 volt, 60-Hertz AC. 570 watts. With 8-ft., 3-wire cord. UL listed.

ORDERING INFORMATION: See warranty on page 116.
9 GT 1784C—Shipping weight 19 lbs.\$34.00



4-gal. Wall-mount Wet/Dry Vac holds 2 1/4 gallons of liquids or 1/5 bushel of dry debris

Stationary mount so vac is up and out of your way . . . 18 foot hose keeps it almost as handy as roll-about models

\$99.00 Wall-mount Wet/Dry with 18-foot hose

Wall-mount Wet/Dry Vac. Industrial type vac designed for use where space is at a premium in factories, stores, laboratories as well as laundry rooms, basement, workshop, or garage in your home. Picks up sawdust, wood chips, nails, and other dry debris plus standing water, suds or spilled liquids.

MOTOR: Ball-bearing, 2 stage type. Steel housing with yellow porcelain enamel finish.

FILTER: Permanent-type paper filter cartridge . . . removes for cleaning, stays in vac during both wet and dry pickups.

TANK: Seamless steel finished in beige porcelain enamel that resists chipping and rust. Tank snaps off motor assembly for emptying contents. Unit is 23 1/2 inches high, 8 1/2 in. in diameter.

ACCESSORIES: With 18-ft., 1 1/2-in. diam. vinyl hose. Additional hose, vac accessory kits sold separately below.

INSTALLATION INFO: Bracket anchors to wall with 5 screws (incl.). Motor assembly, tank hang on bracket.

ELECTRICAL INFORMATION: Uses 120-volt, 60-Hertz, AC. 720 watts. 8-ft., 3-wire cord.

ORDERING INFORMATION: See shipping note below.
T9 GT 1791C—Wt. 20 lbs.\$99.00

Wall-Mount Dry Vac. As Wall-mount Wet/Dry Vac described above except dry pick-up only. Holds 1/5 bushel of dry debris.

ORDERING INFORMATION: T9 GT 1790C—Wt. 19 lbs.\$89.00

Extra Hose. For either vac above. Vinyl, 18-foot long, 1 1/2-inch diameter.

Shpg. wt. 2 lbs. 8 oz.
T9 GT 17903 . . . \$19.95

Accessory Kits for Wall-Mount Vacs


KIT COMPONENTS: 6-piece kits include these 1 1/2-inch diameter accessories: Two-piece extension wand . . . chrome-plated steel, measures 40 in. long assembled. One 14-in. master nozzle with these 3 snap-in inserts: squeegee shoe with rubber insert for picking up liquids; rug shoe for carpeting and brush shoe for floors.

ORDERING INFORMATION: See shipping note below.


Steel Accessory Kit. Master nozzle and 3 inserts made of steel. Extension wand as above. Wt. 7 lbs.
T9 GT 17901C . . . Kit \$49.00

Plastic Accessory Kit. Master nozzle and 3 inserts made of plastic. Extension wand as above. Wt. 6 lbs.
T9 GT 17902C . . . Kit \$34.00


SHIPPING NOTE: "T" prefix items such as (T9 GT 1791C) shipped from Atlanta, Chicago, Dallas, Los Angeles or Philadelphia distribution centers only. Pay shipping and handling charges from center nearest you. Allow extra time.

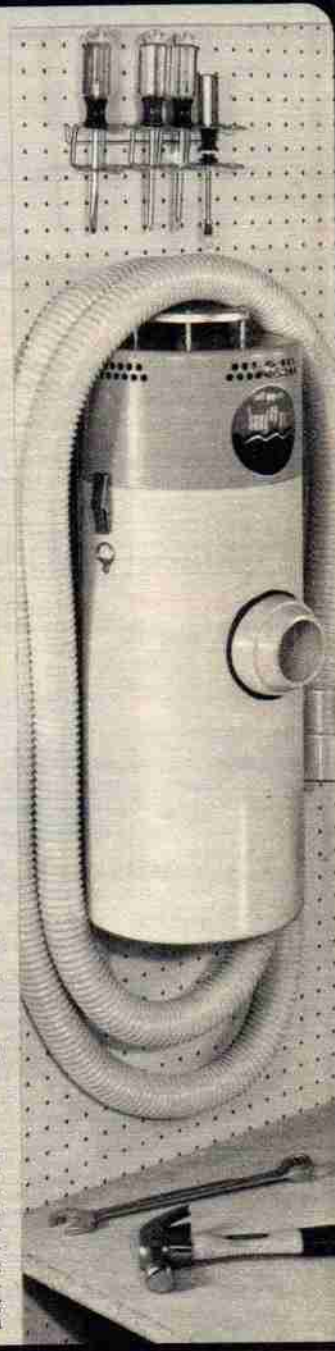

Steel Accessory Kit \$49.00



Vises that give you holding power for "hands free" control you need when drilling, sawing, planing, filing, sanding, cutting threads . . . or any job where a steady workpiece is needed

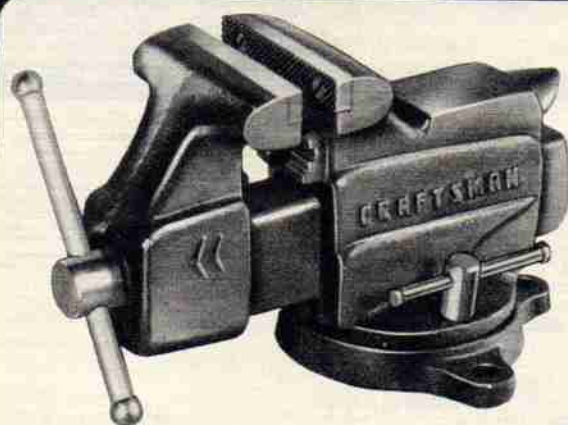

CRAFTSMAN® Heavy-duty Bench Vice
Cast gray-iron reinforced stress points
\$26.50 3 1/2-in. jaws

CONSTRUCTION: Body, Jaws: Cast gray-iron, reinforced at major stress points for durability . . . red finish. Large anvil and anvil horn. Base swivels 165° locks in place with its own handle. Built-in pipe jaws. Jaw Faces: Screw-on, replaceable faces of hardened, tempered steel. Screw and Handle: Steel screw covered on top and sides by steel channel . . . prevents filings from clogging screw threads. Zinc-plated steel handle with forged ball ends. From Japan.

CAPACITIES, ORDERING INFORMATION:

Catalog Number	Jaw size	Opens to	Holds pipe (diam.)	Shpg. wt.	Price
9 GT 5180C	3 1/2 inches	4 inches	1/2 to 1 1/4 inches	19 lbs.	\$26.50
9 GT 5188C	4 inches	5 inches	1/2 to 1 1/4 inches	27 lbs.	42.50
9 GT 5181C	5 inches	6 inches	1/2 to 1 1/2 inches	40 lbs.	59.50



CRAFTSMAN® Woodworking Vice
Quick action screw vise and 12-in. jaw capacity
\$59.50

CONSTRUCTION: Meets Federal Specifications GGG-V-445a for strength. Fits 2 1/4 inch thick bench with 1/2 inch top clearance. From Japan. Body, Jaws: Cast gray iron, red finish. Steel guide rods keep vise aligned, steel drag bar. Retractable dog acts as bench stop. 12 in. capacity. Jaw faces, 4x10 in. . . predrilled holes for attaching wood faces (not included). Screw and Handle: Steel screw. Continuous 180° thread screw. Quick action closing lets you slide vise closed, then tighten with a turn of the hardwood handle . . . reverse action to open.

ORDERING INFORMATION:
9 GT 5195C—Shipping weight 39 pounds . . . \$59.50



CRAFTSMAN Machinists' Vice
of ductile iron for extra strength

(1) Precision built . . . the strongest vise we sell. **CONSTRUCTION:** Meets Federal Specifications GGG-V-410A for strength. From Japan.

Body, Jaws: Ductile cast-iron, reinforced at major points of stress. Self-lubricating graphite bronze bearing absorbs thrust of screw head to reduce friction, cut wear. Jaws measure 4 1/2 in., open to 7 in. Clamps with force to 3 tons. Machined nut, back jaw keyway. Jaw Faces: Hardened, tempered steel. Replaceable "T" section faces pinned to jaws . . . no screws to mar work. Screw, Handle: Cold-rolled steel screw, covered by front jaw beam . . . prevents filings from clogging threads. Ball-ended steel handle.

ORDERING INFORMATION:
9 GT 5197L—Shipping weight 53 pounds . . . \$124.50

(2) **Swivel Base Kit.** (for 9 GT 5197L above). Allows vise to swivel 360°, locks in any position. Ductile cast-iron with center bolt, plug for 1 hole. From Japan.

ORDERING INFORMATION:
9 GT 5198—Shipping weight 8 lbs. 13 oz. . . . Kit \$19.79



(3) **Sears Light-duty Vises**

CONSTRUCTION: Japan. Body, Jaws: Cast-iron body reinforced at major stress points. Red finish. Anvil and Anvil horn. Swivel-type base turns 165°, locks securely. Jaw Faces: Screw-on replaceable jaw faces of hardened tempered steel. Screw, Handle: Steel handle. Screw and lock-nut nickel plated.

CAPACITIES, ORDER INFO: Not Craftsman.
3 1/2-in. jaws. Open to 3 in. Shpg. wt. 11 lbs. 6 oz.
9 GT 5178 . . . \$12.47
4-in. jaws. Open to 5 in. Shpg. wt. 17 lbs.
9 GT 5177C . . . \$17.47



Woodworking Vises

(4) **4 1/2-in. capacity**
CONST.: Fits 2 1/4 in. thick with 1/2 in. top clearance. Japan. Body, Jaws: Semi-steel jaws measure 2 1/2x6 1/2 inches. Red finish. Steel guide rods. 4 1/2 inch capacity. Pre-drilled holes in jaw faces for easy mounting of wood faces (not included). Screw and Handle: Steel screw. Ball ended steel handle. **ORDERING INFO:** Not Craftsman. Wt. 6 lbs. 6 oz. 9 GT 5190C . . . \$11.79

(5) **CRAFTSMAN® 7-in. cap. vise**
CONST.: Fit 2 1/4 in. thick bench with 1/2 in. top clearance. Japan. Body, Jaws: Cast gray iron, red finish. Steel guide rods keep alignment. Jaws have 7-inch capacity. Jaw faces 4x7 in. wide. Pre-drilled screw holes for attaching wood faces (not included). Screw and Handle: Steel screw. Ball-ended steel handle. **ORDERING INFO:** Wt. 12 lbs. 8 oz. 9 GT 5191 . . . \$24.79

(6) **CRAFTSMAN Portable Vise with 2 1/4-in. capacity**
CONST.: Fits bench 1/2 to 2 1/4 in. thick. Body, Jaws: Alum., gray finish. 2 1/4 in. cap. "L" shaped jaws useful for clamping doors upright to bench for planing. Jaws 5 1/2x5 1/2 in. Pre-drilled holes for fastening wood faces (not incl.). Screw, Handle: Steel screw and ball-ended handle. **ORDERING INFO:** Wt. 2 lbs. 1 oz. 9 GT 5202 . . . \$7.47



\$34.99

Versatile Portable Vise
Locks in 3 positions for use in woodworking, metalworking or with a drill press

CONSTRUCTION: Fits bench from 7/8 to 2 1/2 inches thick. Body and Jaws: Natural finish cast aluminum body. Steel guide rods. Jaws have 4 inch capacity. Measures 1 3/4x4 inches wide. Replaceable jaw faces. Change vise to 45° or 90° angle for versatile use . . . on workbench or drill press locks in position. Screw, Handle: Steel screw with quick acting release for closing jaws. Knurled handle in horizontal position lets you get firm grip for tightening.

ORDERING INFORMATION:
Shipping weight 5 pounds.
9 GT 5179 . . . \$34.99



Clamp Vise

\$6.95



Vacuum-base Vise

\$12.95

(7) **Clamp-Vise.** Sets up quickly where the work is . . . holds work securely. **CONSTRUCTION:** Fits benches up to 2 1/2 in. thick. Red finish. From Japan. Body, Jaws: Cast steel. Permanent pipe jaws, double guide bars for smooth action. Jaws 3-in. wide with 2 1/2 in. capacity. Screw and Handle: Steel screw. Nickel-plated "T" handle. **ORDERING INFORMATION:** Not Craftsman. 9 GT 5247—Wt. 4 lbs. 1 oz. . . . \$6.95

(8) **CRAFTSMAN Vacuum-base Portable Vise.** Set up where you need it. **CONST.:** Cast aluminum. Gray finish. Body, Jaws: Apply slight pressure to top of vise and push lever down . . . holds firmly to any surface. Lift lever to release. Cast steel jaws 2 1/2 in. wide, V-groove. Open to 2 in. Slide-on rubber jaws. Screw and Handle: Steel screw, handle. **ORDERING INFORMATION:** 9 GT 5174—Wt. 2 lbs. 12 oz. . . . \$12.95


Work Centers

Design and set up your workshop to suit your needs . . . buy individual 48 or 24-in. units or complete workshop—expand anytime



1 \$44⁹⁹


(1) Portable, Roll-about Workshop

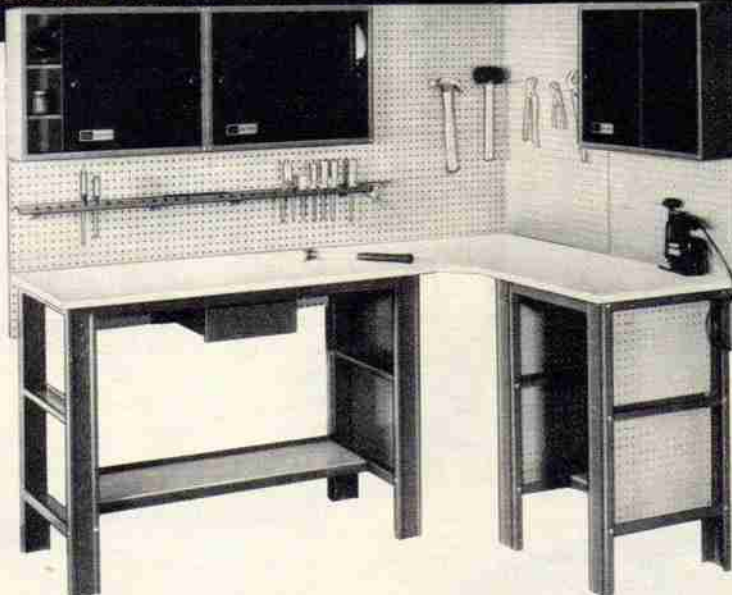

48-inch Unit
\$74⁹⁹

4-sq. ft.
Corner Unit
\$16⁹⁹

24-inch Unit
\$44⁹⁹



Ideal for use where a permanent workshop isn't practical or where portability is needed. Roll about workshop lets you move it where you need it. Only 30 inches wide . . . just right for rolling into a closet when not in use.

CONSTRUCTION: Frame: Steel. Legs mounted on 2½-in. casters . . . lock in place. Overall height 62-in. Knockouts on front legs provide for electrical outlets. **Work Surface:** 20x30x¾ in. thick—industrial grade particle board. Two hinged 9-in. wide side drop panels let you expand work surface to 39 or 48 inches wide. **Storage:** Sliding-door cabinet, 30x12x5 in. deep, includes 2 adjustable steel shelves. Sliding doors of smoke-colored plastic. Drawer mounted under work surface, 12x3x18 in. deep. Perforated hardboard side inserts on legs and back braced top panel provide space for hanging tools (Hooks sold separately below). 10-in. deep bottom shelf. Tool rack with removable drill bit holder.

ORDER INFO: Unassembled. See Shipping Note, p. 122.
T9 GT 1437L—Shipping weight 68 pounds . . . \$44.99

30-piece Hook Set for above. (Not shown.) Fits ¼ and ½-in. perforated board.
9 GT 75631—Shipping weight 1 lb. 4 ounces . . . Set \$3.29

(2 thru 4) Buy all 3 units and you'll have a complete workshop with 16 sq. ft. of table-top work surface

(2 and 4) Free-standing Work Centers.

CONSTRUCTION: Steel construction. Knockouts on front legs provide for 2-plug electrical outlets. **Work surface:** 1-inch thick industrial grade particle board. **Storage:** Perforated hardboard backstop and side panel inserts provide space for hanging tools (hooks sold separately at left). Sliding-door cabinets, 24x12x5 inches deep, each with two adjustable steel shelves. Sliding doors of smoke-colored, see-thru plastic. 10-inch deep bottom shelf. Tool rack with removable drill bit holder. Overall height 72 inches.

SIZE. ORDERING INFO: See Shpg. Note, page 122.

(2) 48-in. Unit. Work surface 48-in. wide, 20-in. deep. Incl. 2 top cabinets, 1 drawer, 12x3x18 in. deep, 48-in. tool rack. Shipping weight 95 lbs.
T9 GT 1433N . . . \$74.99

(4) 24-inch Unit. Work surface is 24-in. wide by 20-in. deep. Includes 1 sliding door cabinet, 24-in. long tool rack. Shipping weight 61 lbs.
T9 GT 1432L . . . \$44.99

(3) Corner Unit. Four sq. ft. of work surface plus space for hanging tools. Work surface of 1-in. thick industrial grade particle board and perforated hardboard backstop fastens at 90° angle. Must be mounted between two free-standing units.


ORDERING INFORMATION: See Shipping Note, p. 122.
T9 GT 1434L—Wt. 35 lbs. \$16.99

Extra Drawers for (2 and 4). 12x3x18-in. deep.

ORDERING INFORMATION: See Shipping Note, p. 122.
T9 GT 1438—Wt. 3 lbs. . . \$4.49

New at Sears . . Portable Sawhorse-Workbench

Use as a vise, sawhorse or scaffolding support . . height adjusts from 30 to 42 in.

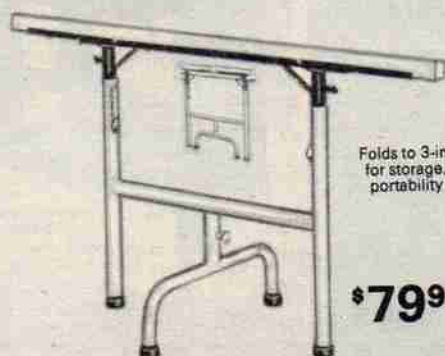

Folds to 3-in. for storage, portability

\$79⁹⁹

Versatile sawhorse frame . . just add 2x2-in. wood members (not included) to top saddles and you have a handy, conventional sawhorse or a stable workbench when top is added across support arms . . ideal quick shop set-up for temporary jobs. Use two for a sturdy scaffolding support. Extension arms let you hold down awkward workpieces . . just swivel arm around, push down and tighten thumb screw.

CONSTRUCTION:

Tubular steel frame adjusts in height from 30 to 42 inches in 2 in. increments. Side arms swivel 360° and raise 12-in. to adjust to any horizontal position you need. Thumb screws tighten them in place for clamping work when drilling or sawing. Measures 53-in. across with arms extended; 32-in. with arms folded inward. Center support leg swivels for flat storage.

ORDERING INFORMATION: Package of 2.

9 GT 28888C—Shipping weight 35 pounds . . . Pkg. \$79.99

The Portable Workbench that's a Vise and Sawhorse too



Grooves in jaws can even grip pipe or round stock

Clamping blocks hold odd-shaped workpieces on top

Vise jaws adjust so you can hold wedge shapes



Folds and stands for compact storage

\$74⁵⁰

A versatile workbench holds awkward workpieces on top or in vise-jaws for hammering, sawing, drilling, planing. Overall: 36x18x32 in. high. Weighs 40 lbs. . . carry it right to job. Folds to 9x36x36 in. high . . . stands upright when folded.

TOP CONSTRUCTION: ¾-inch thick. Insert swiveling clamping blocks in holes on top to grip irregular objects up to 22-in. wide . . . blocks store on side.

BACK PORTION: Particle board. Measures ¾x10x36 inches long.

LEGS: Solid oak. Braced to provide support for top even with rugged use.

WISE JAW PORTION: Solid oak . . 8x36 in. long. Holds objects up to 8-in. wide. Two cranks adjust independently to hold wedge-shaped or straight objects steady. Horizontal and vertical grooves on jaw faces help grip pipe and other tubular objects firmly.

ORDERING INFORMATION: See "N" suffix shipping note on page 92. Shipping weight 40 pounds.
9 GT 28875N . . . \$74.50

WORKBENCH OUTFITS

Like all of our finest-quality hardware, they had to earn the right to wear the name

CRAFTSMAN[®]


Here's what makes these Workbench Outfits so outstanding:

(A) One-inch thick top resists warping, absorbs shock

(B) 14-gauge steel frame crossbraced at front and back for stability

(C) One-piece steel sides have wrap-around corner design for added strength and stability

(D) Feet adjust $\frac{5}{8}$ in. for leveling workbench on uneven floors. Flanges with holes for bolting to floor

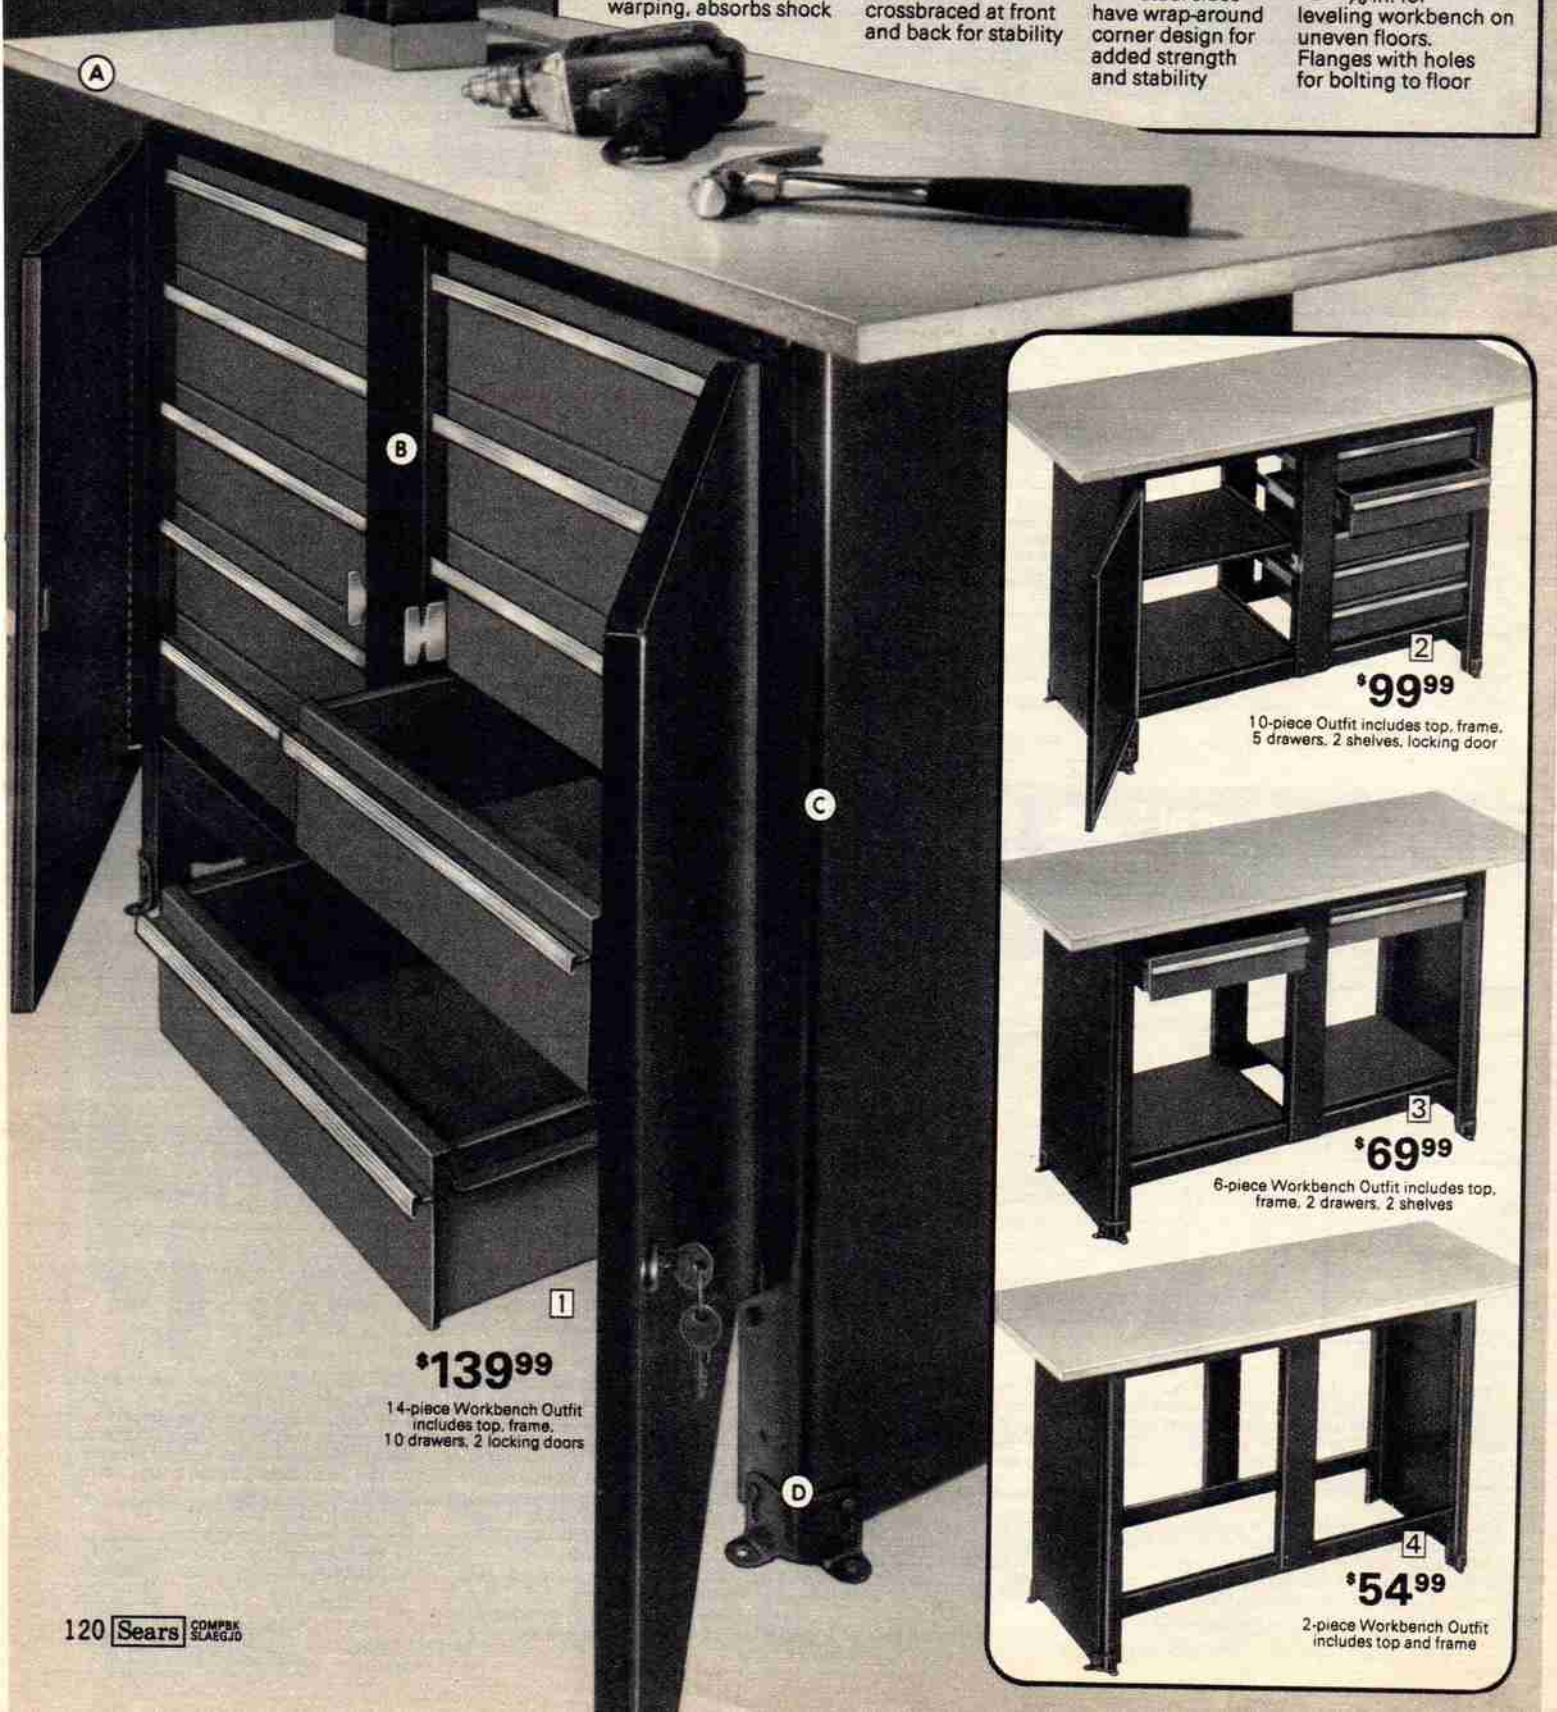

\$139⁹⁹

14-piece Workbench Outfit includes top, frame, 10 drawers, 2 locking doors



\$99⁹⁹

10-piece Outfit includes top, frame, 5 drawers, 2 shelves, locking door



\$69⁹⁹

6-piece Workbench Outfit includes top, frame, 2 drawers, 2 shelves



\$54⁹⁹

2-piece Workbench Outfit includes top and frame

Choose the Complete Outfit that best suits your workshop needs, then order more components later as you need them. Each sturdy component built to last through rugged use

2x5-FOOT TOP: Shock-absorbent hardboard over flakeboard core—a full 1 inch thick. Provides a solid work surface that remains steady even when used while hammering, sanding or sawing. Hardboard surface on both sides, so it's reversible for longer wear.

STEEL FRAME: Crossbraced frame with full side panels for stability. Open back. Stands 32½ inches high. Feet adjust ½-inch for leveling on uneven floors. Frame holds up to 10 drawers with shelves removed (5 on each side), up to 10 shelves with drawers removed. Baked charcoal gray enamel finish.

LOCKING STEEL DOOR: Perforated to hold tool hooks (order on page 119). Mounts on either right or left side of frame on full-length piano-type hinge. Locks with key. Measures 20½x24½ inches high. Baked charcoal gray enamel finish. Includes mounting bolts, nuts, turnbuckle lock and 2 keys.

STEEL SHELVES: Fit either side of frame. Baked charcoal gray enamel finish. 18½x15½ inches.

STEEL DRAWERS: Fit either side of frame. 16½x15½x4½ inches deep. Red enamel finish.

(1) **14-piece Workbench Outfit.** Includes top, frame, 10 drawers, 2 locking doors.

ORDERING INFORMATION: Tools not included. Sent unassembled. Shipping weight 203 pounds. 9 GT 10272N9\$139.99

(2) **10-piece Workbench Outfit.** Includes top, frame, 5 drawers, 2 shelves and locking door.

ORDERING INFORMATION: Sent unassembled. Shipping weight 158 pounds. 9 GT 10286N9\$99.99

(3) **6-piece Workbench Outfit.** Includes top, frame, 2 drawers, 2 shelves.

ORDERING INFORMATION: Sent unassembled. Shipping weight 123 pounds. 9 GT 10288N5\$69.99

(4) **2-piece Workbench Outfit.** Includes top and frame.

ORDERING INFORMATION: Sent unassembled. Shipping weight 90 pounds. 9 GT 10285N\$54.99

Individual Components

ORDERING INFORMATION:

Locking steel Door

Shipping weight 8 pounds. 9 GT 10336C\$10.49

Steel Shelf

Shipping weight 4 pounds. 9 GT 10347C\$4.49

Steel Drawer

Shipping weight 9 pounds. 9 GT 10329\$9.50

Steel Storage Cabinet to hang on the wall over your workbench

Lock valuable tools away while using wasted wall space over your workbench or hobby area.

CONSTRUCTION: Sturdy 24-gauge steel. Double-wall doors and back perforated on inside wall to hold hooks (sold separately on page 119) for hanging small tools and equipment. Three shelves 67½x25½ inches long . . . top 2 adjust in height at 3-in. increments. Two doors braced around edges for rigidity. Magnetic door latches on both doors hold them snugly shut. Pad lock eye. Red enamel finish.


STORAGE CAPACITY: 3.49 sq. ft. for storage on 3 shelves. 3.35 cu. ft. inside with shelves removed.

OVERALL: 30x81½x26½ inches high.

ORDERING INFO: See "N" suffix, page 92.

Shipping weight 34 pounds.

9 GT 6246N\$59.99

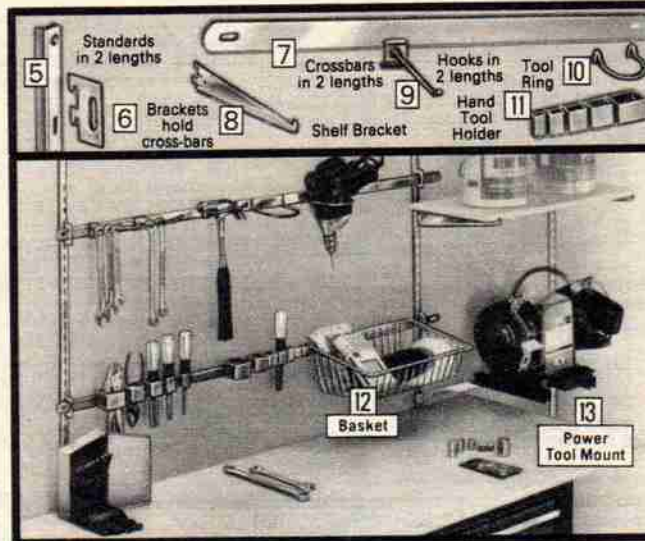

Wall-hung Tool Storage Kit

To assemble, just screw standards to wall (screws included), then arrange parts. Heavy-duty zinc-plated steel construction.

Complete Kit of (5) thru (13)

Standards (5): Fasten to wall; hold brackets, crossbars. One 36-in., two 48-in. included.

Crossbar Brackets (6): Attach to standards; hold crossbars. Three pairs included.

Crossbars (7): Slide into brackets; hold accessories. One 24-in., two 48-in. included.

Shelf Brackets (8): Attach to standards. Hold large equipment or shelves (not included). One pair 12-inch brackets included.

Hooks (9): Snap onto crossbar. Hang tools, paint cans. 4 hooks (two 4-in., two 6-in.).

Tool Rings (10): 3-in. diameter. Hang on crossbars. Package of 2.

Hand Tool Holders (11): Hang on crossbars. Set holds 5 tools. Two sets included.

Wire Tool Basket (12): 7x3x12 in. long. Snaps to crossbar.

Power Tool Mount (13): Holds bench grinder, portable drill press or portable motor. Fits on crossbar, extends 8¾ in. out.

ORDERING INFO: Kit sent unassembled.

Complete Kit

9 GT 62796C2—Wt. 17 lbs.Kit \$39.99

Individual Components

(5) Standards

9GT62757C—36-in. Wt. 1 lb.Each \$1.05

9GT62758C—48-in. Wt. 2 lbs.Each 1.35

(6) Crossbar Brackets. Package of 2.

9 GT 62768—Wt. 10 oz.Pkg. 95c

(7) Crossbars

24-inch

9 GT 62762—Wt. 1 lb. 6 oz.Each \$1.95

48-inch

9 GT 62783C—Wt. 3 lbs.Each 2.95

(8) 12-inch Shelf Bracket

9 GT 62753—Wt. 8 oz.Each 95c

(9) Hooks. Package of 2.

9 GT 62764—4-in. Wt. 7 oz.Pkg. \$1.45

9 GT 62765—6-in. Wt. 7 oz.Pkg. 1.75

(10) Tool Rings. Package of 2.

9 GT 62788—Wt. 6 oz.Pkg. \$1.49

(11) Hand Tool Holders. Set of 5.

9 GT 62789—Wt. 11 oz.Set \$4.49

(12) Wire Tool Basket

9 GT 62787—Shpg. wt. 2 lbs.\$8.99

(13) Power Tool Mount

9 GT 62786—Wt. 1 lb. 12 oz.\$5.99

Bench Legs, Light

(14) Bench Legs.

CONSTRUCTION: Heavy 16-gauge steel. Legs 32½ in. high. Crossbraces 20½ in. long. Baked charcoal gray enamel finish.

ORDERING INFORMATION: Sent unassembled.

Shpg. wt. 28 lbs.

9 GT 1022C\$19.50

(15) Work Light. Clamp

on workbench or mount on wall (brackets for each included).

CONSTRUCTION: 34-in. long heavy-gauge steel arm with spring-tension control. Vented aluminum shade. Black enamel finish . . . white inside shade.

ELECTRICAL INFO: 6-ft., 2-wire cord. Takes 60-w. bulb (not included). 110-120-v., AC. UL listed.

ORDERING INFO:

Shpg. wt. 3 lbs. 10 oz.

9 GT 2488\$19.99



Dry Chemical Fire Extinguishers for all 3 classes of fires

Class A fires. Burning paper, wood, fabric where water or multi-purpose dry chemical is most effective agent.

Class B fires. Burning flammable liquids (gasoline, oil, paint). Smothering is required.

Class C fires. In electrical equipment. Extinguishing agent must be non-conductor of electricity.

The higher the rating, the more effective on class of fire indicated.

Both extinguishers professionally rechargeable. UL listed. APPLICATION: For Class A, B, C fires. Meet requirements of Occupational Safety and Health Act, Marine Testing Inst., Factory Mutual Research Corp.

EXTINGUISHING AGENT: Mono-ammonium phosphate dry-chemical charge. Non-toxic. Discharges 12 to 20 feet. Protection for up to 11,250 sq. ft. occupancy.

CONSTRUCTION: Pull-pin prevents accidental discharge. Pressure gauge shows amount of charge stored in red steel casing. Chrome-plated brass valve. Hanging.

(16) 20-pound

RATING: 10-A; 80-B-C

ORDERING INFORMATION:

Shpg. wt. 37 lbs.

9 GT 5809C\$49.95

(17) 10-pound

RATING: 4-A; 60-B-C

ORDERING INFO:

Shpg. wt. 19 lbs.

9 GT 5801C\$34.95



COMPRK LAEGJD Sears 121

Lots more workshop needs on the next page.

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



(1) All-steel Workbench

TOP: Rugged 12-gauge steel 29 in. wide. FRAME: 12-gauge steel . . . seamed for extra strength. All legs punched to hold electrical outlet. Legs, supports molded to hold conduit on inside. Stands 33½ inches high. Gray enamel finish.
ORDERING INFORMATION: Sent unassembled. See shipping note, right.

5-foot long top
F9 GT 10281N—Wt. 103 lbs. \$75.00

6-foot long top
F9 GT 10282N—Wt. 131 lbs. \$85.00

(2, 3) Steel Drawers for (1) above

6½x23½x15 in. wide.
CONSTRUCTION: Steel frame. With latch, padlock hasp, mounting hardware.
ORDERING INFO: See shpg. note, right.

(2) Mounts to workbench frame only.
F9 GT 10283—Wt. 29 lbs. ... Ea. \$32.90

(3) Mounts under drawer (2) only.
F9 GT 10284—Wt. 20 lbs. ... Ea. \$32.90

(4) Shelf-style Workbench

TOP: 2x5 feet long, 1 inch thick. Hardboard over flakeboard core.
FRAME: Heavy, 16-gauge steel to accommodate heavy workloads. Legs adjust up ½-inch for leveling on uneven floors. Baked charcoal gray enamel finish. Stands 34 inches high with top. Holds 2 drawers, sold separately below.

ORDERING INFO: Sent unassembled.
9 GT 10271N2—Shpg. wt. 81 lbs. \$44.95

(5) Drawers for shelf-style workbench (4) above

Steel with red enamel finish. Measure 16½x15½x4½ in. deep.
ORDERING INFORMATION:
Shipping weight 9 pounds.
9 GT 10329 Each \$9.50

(6) Crossbrace-style Workbench. Like (4) above, but does not hold drawers.

ORDERING INFO: Unassembled. See "N" suffix note on page 92.
9 GT 10279N—Wt. 67 lbs. \$37.99

(7) Workbench Stool

FRAME: 16-gauge steel. Gray enamel finish. Steel glide feet.
SEAT: Pressboard. 14x14½ inches wide. 26 inches high.
ORDERING INFO: Wt. 10 lbs.
9 GT 10287C . \$12.99

(8) Workbench Stool with back

FRAME, BACK: 16-gauge steel. Back bolted to sturdy support. Gray enamel finish. Rubber feet with steel glides. 37 inches high.
SEAT: Pressboard 14x14½ inches wide. 26 inches high.
ORDERING INFO: If mailed, takes 15 lb. rate. See parcel post info, p. 92.
Wt. 14 lbs.
9 GT 10288L . \$21.99

(22) Woodworker's Bench with 78½-in. clamping capacity

CONSTRUCTION: Solid hardwood maple. Steel vise handles, screws, guide rods; pressboard drawer bottoms. 37x75x33 in. high.

TOP WORK SURFACE: 15½x70 in. long. Four pegs hold two 15½-in. long clamping bars in place . . . pegs fit into 14 pairs of holes 4½ in. apart on top of table, vise. Clamping capacity 1¼ to 78½ in.

END VISE: 10½-in. vise capacity. 3x5½-in. face. With 2 guide rods.

SIDE VISE: 5¼-in. capacity. 9½x27½-in. face. With 2 guide rods.

TOOL TRAY: Holds tools and equipment or sawdust and scraps. Can be unscrewed and attached to end of table. 34x8½x2 in. deep.

TWO DRAWERS: Each measures 14x3½x9½ in. wide.

LEGS: Trestle style with crossbraces for stability. One leg has four vertical supports instead of two for extra lateral support.

ORDER INFO: See shipping note below. Unassembled. Wt. 175 lbs.
T9 GT 10231N \$279.95

(23) Woodworker's Bench with 68-inch clamping capacity

CONSTRUCTION: Solid hardwood maple. Steel vise handles, screws, guide rods; pressboard drawer bottom. Overall 30½x70½x32½ in. high.

TOP WORK SURFACE: 23½x60 in. long. Four pegs hold two 23-in. long clamping bars in place . . . pegs fit in 10 pairs of holes 5¼ in. apart on top of table and vise. Clamping capacity 2¼ to 68 in.

END VISE: 10½-in. vise capacity. 3x24-in. face. With 2 guide rods.

SIDE VISE: 2-in. capacity. 2½-in. diameter round face.

TOOL TRAY: For tools, sawdust or wood scraps. Mounts on end of table. Measures 29x6x3 in. deep.

DRAWER: 3½x22½x3½ in. wide.


LEGS: Trestle style with crossbraces for stability.

ORDERING INFO: See shipping note below. Sent unassembled.
Shipping weight 140 pounds.
T9 GT 10232N \$229.95

SHIPPING NOTE:

"T" items (as T9 GT 10231N) shipped by motor carrier from Chicago, Philadelphia, Atlanta, Dallas or Los Angeles. "F" items (as F9 GT 10283) from factory in Aurora, Ill. Pay shipping charges from your Distribution Center. "F" items with "N" suffix (as F9 GT 10281N) pay motor carrier charges from factory.
Allow extra time. No C.O.D.'s.

Storage Cabinets for small parts

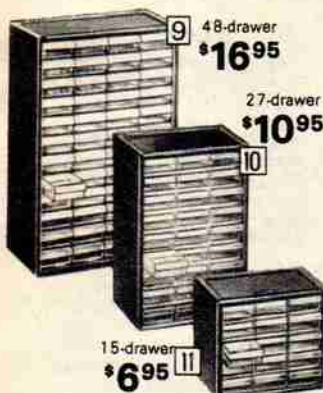

(9 thru 11) CRAFTSMAN Cabinets

FRAME: Brown one-piece frame molded of high-impact styrene plastic.
DRAWERS: Clear plastic . . . measure 1½x5½x2¼ inches wide.

(9) With 48 drawers
Overall: 12½x6½x20 inches high. With 40 plastic drawer dividers.
ORDERING INFORMATION:
9 GT 65346C—Wt. 17 lbs. \$16.95

(10) With 27 drawers
Overall: 10x6½x15 inches high. With 20 plastic drawer dividers.
ORDERING INFO: Wt. 10 lbs. 2 oz.
9 GT 65343 \$10.95

(11) With 15 drawers
Overall: 10x6½x8¾ inches high. With 20 plastic drawer dividers.
ORDERING INFO: Wt. 5 lbs. 14 oz.
9 GT 65342 \$6.95

(12 thru 15) Sears Cabinets

FRAME: Metal sides with blue baked enamel finish. Plastic top and bottom. Handle on top.
DRAWERS: Clear plastic drawers measure 2½x6½x1¼ in. deep.

(12) With 40 drawers
Overall: 9¾x6½x17 in. high. With 18 plastic drawer dividers.
ORDERING INFORMATION:
9 GT 65349—Wt. 9 lbs. . \$13.95

(13) With 32 drawers
Overall: 9¾x6½x13¾ inches high. With 12 plastic drawer dividers.
ORDERING INFO: Wt. 7 lbs. 7 oz.
9 GT 65355 \$12.99

(14) With 20 drawers
Overall: 9¾x6½x9 in. high. With 12 plastic drawer dividers.
ORDERING INFO: Wt. 4 lbs. 13 oz.
9 GT 65348 \$6.95

(15) With 12 drawers
Overall: 9¾x6½x5½ in. high. With 6 plastic drawer dividers.
ORDERING INFORMATION:
9 GT 65358—Wt. 3 lbs. \$4.65



Shelf Organizers

Hang on wall or set on workbench

\$14.99

3 shelves, 20 drawers



CONSTRUCTION: Steel shelves, frame . . . gray enamel finish. Shelves 28½x7 in. See-thru plastic drawers 2¼ in. wide, 5¼ in. long . . . small drawers 1¼ in. high; large drawers 2 in. high. Overall: 30x7x22½ inches high.
ORDER INFO: Unassembled. Tools not included.

(16) With 3 shelves, 20 drawers. 10 small, 10 large drawers.
9 GT 65347C—Shipping weight 13 lbs. . \$14.99

(17) With 2 shelves, 50 drawers. 30 small, 20 large drawers. Adjustable center shelf.
9 GT 65356C—Shipping weight 22 lbs. . \$26.99



(18 and 19) Wood and Sheet Metal Screws. Zinc plated steel. No. 6, 8 and 10 sizes. Approx. 1 lb. plastic box.
ORDERING INFO: Shpg. wt. 1 lb. 3 oz.

(18) For wood
9 GT 7115 Box \$2.99

(19) For sheet metal
9 GT 7116 Box \$2.99

(20) Stove Bolts
Zinc plated. No. 10 and ¼-in. sizes. Approx. 1 lb. packed in plastic box.
ORDERING INFORMATION:
Shipping weight 1 pound 3 ounces.
9 GT 7117 Box \$2.99

(21) Flat and Lock Washers. Zinc plated steel. ⅜, ½, ⅝ and ¾-in. sizes. Approx. 1 lb. in plastic box.
ORDERING INFORMATION:
Shipping weight 1 pound 3 ounces.
9 GT 7118 Box \$2.99

From rough-hewn lumber to fine-finished furniture and sculpture . . .
CRAFTSMAN® Woodworkers' Benches can help you every step of the way



Measuring and marking
 . . . secure work in
 side vise

Sawing . . . plenty of
 gripping power in
 reinforced end vise

Planing, chiseling, shaping
 . . . side vise has work-
 stopping shoulder design

Carving . . . top resists
 warping from
 uneven stress


Assembling, gluing,
 veneering . . . clamping
 bars hold work on top

(22) Woodworker's Bench

has extra-long
 78½-in. clamping capacity
 . . . ideal for long pieces
 like grandfather's clocks,
 yet narrow enough (15⅝ in.)
 to let you work close to
 pieces clamped on top *plus*:

\$279⁹⁵

- Sturdier side vise with larger face than bench (23) below
- Two tool drawers

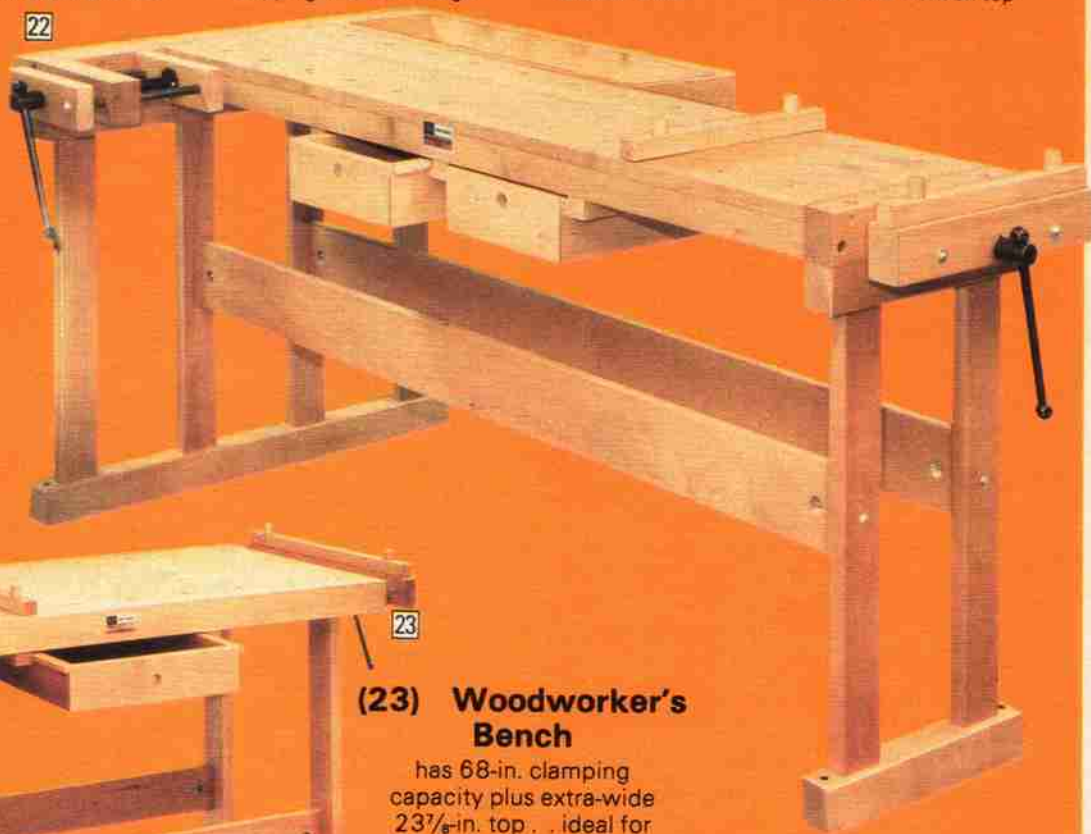


(23) Woodworker's Bench

has 68-in. clamping
 capacity plus extra-wide
 23⅞-in. top . . . ideal for
 wide pieces like table tops,
 picture frames *plus*:

\$229⁹⁵

- Side vise with round face
- One tool drawer

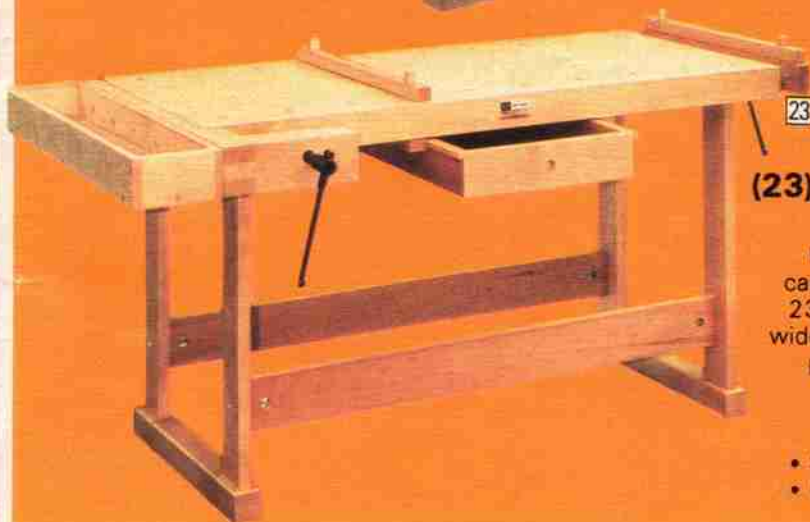

Patio, greenhouse, basement or garage . . . **\$229⁹⁵** **Gardener's Potting Bench**

Lets you pot plants, stash tools in one handy spot

- Formica® plastic laminate top surface resists moisture and stains . . . wipes clean with a damp cloth
- Drawer has plenty of room to store tools and equipment
- Plastic pans hang under openings in table top . . . use to collect plant cuttings, mix soil or fertilizer, then just slide out to empty
- Store pots and tools, or show off growing flowers and plants on raised shelf
- Lock fertilizer and insecticide in cabinet . . . with 2 plastic pans, 2 shelves

OVERALL SIZE: 62x26x47½ inches high.
 TOP: 1½x26x62 in. long. Maple-look Formica® plastic laminate surface bonded to moisture resistant flakeboard core. Two openings for access to 2 slide-out plastic pans. Openings: 3x8 and 10x14 in. Pans: 3½ in. deep, 16½ inches long, 7 and 12 inches wide. Drawer 3½x22¼x16 inches wide . . . maple veneer over flakeboard with pressboard bottom.
 RAISED SHELF: Solid hardwood maple with 5x60-in. storage surface.
 LOCKING CABINET: Maple veneer over flakeboard. With 2 flakeboard shelves, 2 plastic storage pans, 2 keys for lock.
 LEGS: Solid hardwood maple. Trestle style with crossbraces for stability.
 ORDERING INFORMATION: See shipping note on previous page. Sent unassembled.
 Shipping weight 135 pounds.
 T9 GT 10233N **\$229.95**



CRAFTSMAN® 6 1/8-in. Jointer-Planer

12,900 cuts per minute from 3 precision ground steel knives to give you smooth, true edges for flush fitting joints, surfaces and planes rough and warped wood up to 6-inches wide . . . bevels up to 45°



(1) Jointer-Planer, motor and stand **\$319⁹⁵**

Jointer-Planer with motor **\$289⁹⁵**

(2) Jointer-Planer alone **\$269⁹⁵**

MOTOR: Capacitor start, 3450-rpm, 1/4-HP motor (9 GT 1218C). Permanently lubricated ball bearings. Manual reset overload protector.

CAPACITY, CONST.: Cutter head spins on permanently lubricated ball bearings. 3 precision ground-steel knives cut to 1/8 in. deep by raising, lowering infeed table. Make up to 12,900 cuts per min. Rigid 1-piece cast iron bed and out feed table . . . planes boards up to 6-in. wide in one pass. Cast-iron fence, single locking knob for bevel and lateral adjustments . . . positive stops at 45° and 90°. Built-in scale shows degree of fence tilt. 40°x20°x9 3/4 in. high.

STAND ACCESSORIES: Steel stand. Top, 37 1/2x15 1/4 in. wide. Adjustable leveling feet . . . rubber pads resist creeping. Incl. motor mount. 2 wood hold-down push block. V-belt machine, motor pulleys, belt guards. Stand unassembled.

ELECTRICAL INFO: Runs on 115 or 230 v., 60 Hz. AC. 720 full load input watts. Lockable pull-on push-off power switch. 4-ft., 3 wire cord. Switch has receptacle for use with 115 v. motor. UL listed.

ORDERING INFORMATION: See Warranty on page 103.

(1) Jointer-Planer, Motor and Stand.
9 GT 20686N3—Shipping weight 178 pounds . . . \$319.95

Jointer-Planer with motor. Without stand.
9 GT 20681N2—Shipping weight 143 pounds . . . \$289.95

(2) Jointer-Planer alone. Without motor or stand.
9 GT 2068N—Shipping weight 126 pounds . . . \$269.95

Steel Stand for Jointer-Planer. Same as stand described at left, shown above with (1).

ORDERING INFORMATION: See "N" suffix note, p. 92.
9 GT 22216N—Shipping weight 35 pounds . . . \$34.99

Extra Cutting Knives (not shown). Precision-ground steel. For replacing knives in Jointer-Planer (1 and 2) described at left only. Package of 3 knives. Order knife setting Gauge set below separately.

ORDERING INFORMATION:
9 GT 2293—Shipping weight 13 oz. . . . Pkg. \$9.99

(3) **Knife Setting Gauge Set.** For installing new or resharpened cutter knives. Cast-iron gauge with micrometer adjustments. Includes blade touch-up stone.

ORDERING INFORMATION:
9 GT 2647—Shipping weight 1 lb. 10 oz. . . . Set \$14.49

CRAFTSMAN® Planer-Molder planes wood smooth or molds stock up to 12 1/4-in. wide and 6-in. thick in one pass



Complete outfit
\$869⁹⁵

Planes rough surfaces and edges to a professional-type smoothness. Make trim for windows, doors, baseboards and other projects using proper cutter bits sold separately at right.

MOTOR: High starting torque, capacitor start, 3450 rpm, 2-HP motor (9 GT 1231C). Permanently lubricated ball bearings. Totally enclosed, fan cooled.

CAPACITY, CONSTRUCTION: Three knife, ball bearing cutter-head slices up to 3/16 inches deep in single pass . . . turns at 4,000 rpm. Power feed at 12 feet per minute. 42 inch long steel bed provides support for long work pieces. Planes stock smooth or molds stock up to 12 1/4 inches wide, and 6 inches thick.


STAND, ACCESSORIES: Includes steel stand that measures 22 1/2 inches high with 24 3/4 inch square bottom. Also includes cast-iron 5 inch 2-groove motor pulley and drive belts. Pushbutton on-off switch.

ELECTRICAL INFORMATION: 115-230 volt, 60 Hertz AC. 2400 full load input watts. Switch can be wired for 115 or 230 volts. Complete wiring instructions (wire not included).

ORDER INFO: See Warranty on page 103.
T9 GT 23399N3—Shipping wt. 350 lbs. . . \$869.95

Planer-Molder alone. No stand, motor or switch.
9 GT 2339N—Shpg. wt. 225 pounds . . . \$569.00

SHIPPING NOTE: "T" items (as T9 GT 23399N3) shipped from Chicago, Philadelphia, Atlanta, Dallas or Los Angeles. Customers served by other Distribution Centers should allow time. Pay shipping and handling charges from your Distribution Center.

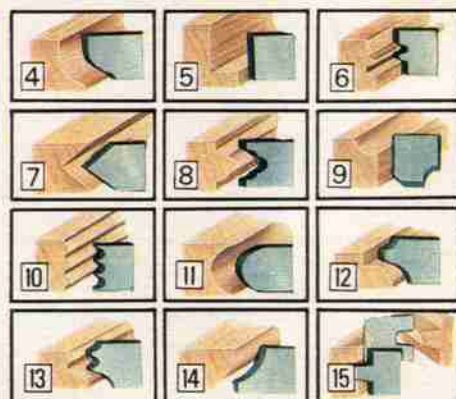

(4 thru 15) Molding Cutter Bits

For Molder-Planer at left. Alloy steel. Set of 3.

ORDERING INFORMATION:

Shaper Cutter type	Catalog No.	Wt. oz.	Set
(4) 1-in. and 1/2-in. radius flute	9 GT 23311	2	\$4.49
(5) Rabbet	9 GT 23301	2	4.49
(6) Glue joint	9 GT 23307	2	4.49
(7) 90° flute	9 GT 23309	2	4.49
(8) Clover-leaf	9 GT 23306	2	4.49
(9) Window, door stop	9 GT 23308	2	4.49
(10) 3-bead	9 GT 23305	2	4.49
(11) 1/2-1/4-in. qtr. rd.	9 GT 23304	2	4.49
(12) 3/16-3/8-in. qtr. rd.	9 GT 23313	2	4.49
(13) Base mold	9 GT 23303	2	4.49
(14) 3/16 in. qtr. round cove	9 GT 23312	2	4.49

(15) **Tongue and Groove Molding Cutter Bits.** For Planer-Molder at left. Alloy steel.

ORDERING INFORMATION: Set of 6 bits.
9 GT 23302—Shpg. wt. 4 oz. . . . Set \$8.49

CRAFTSMAN Belt-Disc Sander

Over 100 square inches of sanding surface for rough or fine finishing on irregular, beveled or straight surfaces



(1) Sander with stand and motor

\$219⁹⁵

(2) Sander alone

\$149⁹⁵

9-in. disc, 6x48 in. belt . . . over 100 sq. in. of sanding surface for rough, fine or smooth finishing.

CONSTRUCTION: Sturdy 6 1/4 x 12 inch cast iron table tilts to 45° for bevel sanding . . . has 3/4 x 3/8 inch miter gauge groove (miter gauge not included). Table removes for use with disc or belt. Belt tilts and locks at any angle horizontal to vertical . . . backstop provides bracing for workpieces. Adjustable belt tension, tracking. Drive shaft, pulleys revolve on permanently lubricated ball bearings.

STAND, ACCESSORIES: Steel stand, rubber padded leveling feet. Top 19 1/2 x 15 1/4 in. 1 med. grit disc and belt, machine, motor pulleys, guard with coupling for vac, V-belt. Unassembled.

MOTOR: Capacitor-start 1/2-HP, 3450 rpm motor. Permanently lubricated sleeve bearings.

ELECTRICAL INFORMATION: Runs on 115 volt, 60 Hertz AC. 720 full load input watts. Lockable pull-on/push-off power switch with 6-ft., 3-wire cord. ORDERING INFO: See Warranty on page 103.

(1) Sander, Motor and Stand

9 GT 22525N3—Shipping weight 131 lbs. \$219.95

(2) Sander alone. Without motor, stand. UL listed. 9 GT 2252N—Shipping weight 77 lbs. . . . \$149.95

Stand alone

9 GT 22213C—Shipping weight 37 lbs. . . . \$34.99

(3) Heavy-duty Caster Set


Support up to 400 pounds. Steel frame with phenolic plastic wheels. Front 2 1/2-inch diameter swivel casters. Rear 3-inch diameter casters are rigid. T-handle adjusts height. Set of 4.

ORDERING INFORMATION:

Shipping weight 6 pounds 8 ounces.

9 GT 22201 . . . Set \$19.50

See page 20 for replacement sanding belts and sanding discs with grits from extra fine to coarse for the finish you want

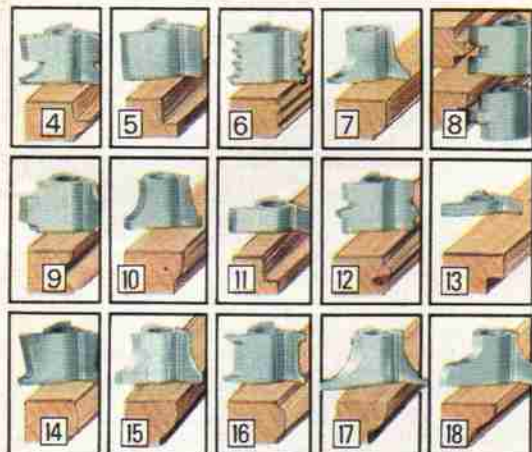

(4 thru 18) Alloy steel Shaper cutters for Wood Shaper sold at right

Use with shaper at right to make patterns shown above. All cutters have 2 inch diameter, 1/2 inch bore, 1 inch high except (11); 1/2-inch high and (13); 3/4-inch high. Made of long-lasting alloy steel.

SHAPE. ORDERING INFORMATION:

Shaper Cutter Type	Catalog Number	Wt. oz.	Price
(4) Lip Cupboard Door or 3/4-in. Quarter Round	9 GT 3294	5	\$5.59
(5) 1-inch Jointer	9 GT 3289	5	5.59
(6) 3-bead, 1/4-in. Molding	9 GT 3293	5	5.59
(7) 1/2-in. radius Base Shoe Molding or 1/2-in. Quarter Round	9 GT 3285	5	5.59
(8) 1/4-in. Tongue and groove Matched Set	9 GT 3283	8	10.99
(9) 1/4 and 1/2-in. radius Ease Edge or 1/4-inch Glass Bead	9 GT 3295	5	5.59
(10) Drop Leaf Bead	9 GT 3291	5	5.59
(11) 1/2-inch Groove	9 GT 3288	4	5.59
(12) Reversible Glue Joint	9 GT 3284	4	5.59
(13) 1/4-inch Groove	9 GT 3287	4	5.59
(14) Taper Edge	9 GT 3292	5	5.59
(15) Drop Leaf Cove	9 GT 3290	5	5.59
(16) 1/4-in. Ease Edge or Screen Molding	9 GT 3286	5	5.59
(17) 2 1/2-in. diam., 3/4-in. Quarter Round	9 GT 3281	5	7.99
(18) 2 1/2-in. diam., 1/4-in. Ogee Molding	9 GT 3282	5	7.99



(19) Sash and Door Cutting Kit

For making intricate cuts used in door and window frames. Includes 5 spacer collars with 1/2 inch bore (1/4, 1/4, 1/4, 1/2 and 1 inch); sash cutter blade; 3 recessed nuts (1/2x24, 1/2x20, 1/2x16 Acme thread); and hex key.

ORDERING INFORMATION: Use with shaper at right or former shaper 9-2392 or 9-2394. Shipping weight 8 oz. 9 GT 2407 . . . Kit \$7.99

(20) Five-piece Shaper Collar Set

Provides bearing surface above or below cutter for part not to be shaped. Fits 1/2-inch spindle.

ORDERING INFORMATION: Shipping weight 8 oz. 9 GT 23672 . . . Set \$5.29

CRAFTSMAN High-speed Shaper

Runs at approximately 9,000 rpm for cutting scallops, rabbits, moldings, contours plus many more with cutters sold at left . . . cuts smooth, so almost no sanding is needed



Shaper with stand and motor

\$259⁹⁵

Shaper alone

\$189⁹⁵

Includes shaper cutter guard for contour shaping

(21) Shaper with Stand and Motor

CONSTRUCTION. CAPACITY: Cutter head revolves at approximately 9,000 rpm for smooth cuts. One-piece, ground cast-iron table measures 19x27 inches . . . has 3/4x3.8 inch groove for miter gauge (not included). Each half fence individually adjustable from left to right, front to rear. Features cutter guard for contour shaping. Spindle turns on permanently lubricated ball bearings. Spindle height adjusts 3/8-in. accepts cutters of 1/2 in. bore up to 2 1/2 inch diameter.

STAND, ACCESSORIES: Includes steel stand with rubber padded leveling feet to help prevent marring and creeping. Also includes belt pulley guard, hardened collars, nuts, washers, motor and machine pulleys and V-belt. Stand sent unassembled.

MOTOR: Capacitor-start 1/2-HP, 3450 rpm motor. Permanently lubricated sleeve bearings.

ELECTRICAL INFO: Runs on 115 volt, 60 Hertz AC. 720 full load input watts. Lockable pull-on push-off power switch with 6-foot 3-wire cord.

ORDERING INFORMATION: See Warranty on page 103.

9 GT 23938N3—Shipping weight 147 pounds . . . \$259.95

(22) Shaper alone. Without stand or motor.

9 GT 2393N—UL listed. Shpg. wt. 95 lbs. \$189.95

COMPARE AT Sears 125

15 1/2-INCH DRILL PRESSES

Like all of our finest-quality tools, it had to earn the right to wear the name

CRAFTSMAN®

Here's what makes the drill presses on these two pages so outstanding:

- ① 8-speeds . . . choose 380, 480, 720, 1325, 2300, 4250, 6400 or 8550-rpm depending on the drilling or specialized job you are doing
- ② Fast speed changes . . . just lift the hinged belt and pulley guard, release belt tension and shift belt on pulleys to select the speed desired
- ③ Side mounted information charts . . . speed your set-ups; one shows bit size and speed for various materials, other shows bit size for tapping operations
- ④ Powerful torsion spring . . . provides quick, positive quill return; just set depth gauge to make repetitive drilling easy
- ⑤ Cast-iron head, table and base . . . all mounted on sturdy steel column
- ⑥ Pull-on/push-off power switch is located up front for quick, easy access; has removable plastic locking key

Both are backed by our Full One-Year Warranty . . . see below for details

(A) Home-Shop Drill Press

Drill press alone **\$279⁹⁵**

Drill press with motor **\$309⁹⁵**

(B) Industrial-type Drill Press

Drill press alone **\$339⁹⁵**

Drill press with motor **\$379⁹⁵**

*Sears * Best*

HOME-SHOP DRILL PRESS SPECIFICATIONS

Model Number	9 GT 2137N
Speeds-eight	380, 480, 720, 1325, 2300, 4250, 6400, 8550 R.P.M.
Distance spindle to column	7 3/4 inches
Distance base to chuck	48 1/2 inches (maximum)
Table travel	42 1/2 inches
Spindle	No. 33 Jacobs taper
Spindle travel	4 inches (maximum)
Depth graduations	1/16-inch
Chuck capacity	0-1/2 inch
Drive splines	Six
Work table surface	10 x 12 inches
Lower spindle bearing	single-row, ball-type
V-belt	3/16 x 45 inches
Machine pulley	6-inch, 8-step
Motor pulley	6-inch, 8-step 3/8-in. bore keyed
Height x width x depth	72 1/4 x 15 x 27 in.
Motor	Use 1/2-HP 1725-rpm

Home-Shop Drill Press Alone.

Designed for the needs of the home workshop or light industrial applications.

HEAD CONSTRUCTION: One-piece cast-iron. Lower spindle bearing assembly is single-row ball bearing type for prolonged drill life and smooth operation. Pulleys turn on ball bearings. Built-in work light. Light and power switches work independently . . . power switch has 6-foot, 3-wire cord and receptacle for connecting 115-volt motor.

COLUMN, TABLE, BASE: Steel column. Cast-iron slotted work table with clamping ledges for mounting accessories measures 10x12 inches. Table slides up or down on column a total of 42 1/2 inches. Cast-iron base has pre-cast holes for bolting base to floor (bolts not included).

ACCESSORIES: Includes chuck, keys, belt, machine and motor pulleys. Motor not included . . . order drill press with motor below or use a minimum 1/2-HP, 1725-rpm motor. Additional accessories for specialized wood working operations, metal and wood drilling sold separately on facing page.

ORDERING INFORMATION: See specifications at left and warranty below, right. 9 GT 2137N—Wt. 181 lbs. . . . \$279.95

Home-Shop Drill Press with motor

As (A) above but with 1/2-HP, 1725-rpm motor. Capacitor start with sleeve bearings.

ELECTRICAL INFORMATION: Uses 115-volt, 60-Hz. AC. 660-full load input watts. With 4-ft., 3-wire cord that connects to power switch in drill press.

ORDERING INFORMATION: For more complete motor description and warranty see 9 GT 1255C on page 108. 9 GT 2137 1N2—Wt. 202 lbs. . . \$309.95

Industrial-type drill press alone.

Shown on facing page. Designed to produce results according to the close tolerances and accuracy specifications needed in industrial and/or commercial-type applications.

HEAD CONSTRUCTION: Split-head of cast iron with take up adjustment that allows you to compensate for normal quill wear. Double-row lower ball bearing assembly is pre-loaded to minimize spindle drop . . . withstand heavier thrusts than Home-Shop Drill Press at left. Pulleys turn on permanently lubricated ball bearings. Built-in light illuminates work area. Combination light and power switch with 6-foot, 3-wire cord and receptacle for connecting 115-volt motor.

COLUMN, TABLE, BASE: Steel column. Cast-iron table with "T" slots for attaching accessories . . . has trough for catching liquid coolants. Measures 14x14 1/4 inches. Table slides up or down on column a total of 42 1/2 inches. Cast-iron base with pre-cast holes for bolting base to floor (bolts not included).

ACCESSORIES: Includes chuck, key, belt, machine and motor pulleys. Motor not included . . . order drill press with motor below or use minimum 1/2-HP, 1725-rpm motor. Additional accessories for specialized wood working operations, metal and wood drilling sold separately on facing page.

ORDERING INFORMATION: See specifications on facing page and warranty below.

Shipping weight 200 pounds. 9 GT 2461N \$339.95

Industrial-type Drill Press with Motor

As in (B) above but with 1/2-HP, 1725-rpm motor. Capacitor start with ball bearings.

ELECTRICAL INFORMATION: Uses 115/230-volt, 60-Hertz, AC. 650-full load input watts. With 4-foot, 3-wire cord that connects to power switch in drill press. Switch for 115-volt use only.

ORDERING INFORMATION: For more complete motor description and warranty, see 9 GT 1254C on page 108.

Shipping weight 221 pounds. 9 GT 2461 1N2 \$379.95

Sears Has a Credit Plan to Suit Most Every Need


See Big Book or ask for details



INDUSTRIAL-TYPE DRILL PRESS SPECIFICATIONS

Model Number	9 GT 2461N
Speeds-eight	380, 480, 720, 1325, 2300, 4250, 6400, 8650 R.P.M.
Distance spindle to column	7 3/4 inches
Distance base to chuck	48 1/4 inches (maximum)
Table travel	42 1/2 inches
Spindle	No. 33 Jacobs taper
Spindle travel	4 in. (maximum)
Depth graduations	1/16-inch
Chuck capacity	0-1/2-inch
Drive splines	Six
Work table surface	14 x 14 1/2 in.
Lower spindle bearing	preloaded double-row, ball-type
V-belt	3/16 x 45 inches
Machine pulley	6-inch, 8-step
Motor pulley	6-inch, 8-step 5/8-inch bore keyed
Height x width x depth	72 1/4 x 15 x 27 inches
Motor	Use 1/2-HP, 1725-rpm

ORDER DRILL PRESS (B) ON FACING PAGE

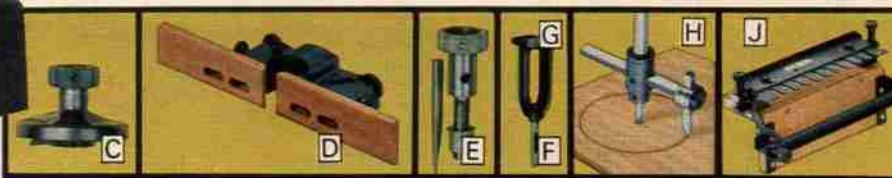

Spindle-mount drill press accessories for specialized wood working operations

(C) CRAFTSMAN Rotary Planer

Mounts on spindle in place of chuck to surface-plane wood, reduce stock to a desired thickness. Also dresses, trues up, finishes rough or warped stock.

CONSTRUCTION, CAPACITIES: Die cast aluminum body with steel blade. Planes 2 1/2-in. wide path. Fits presses on these 2 pages, former 9-2131 and most drill presses with No. 33 Jacobs taper and 1 1/16 x 20-in. threaded locking collar.

ORDERING INFORMATION:

9 GT 2745—Shipping weight 1 lb. \$14.99

(D) CRAFTSMAN Shaper Fence Attachment

Helps support work pieces for shaping work like picture frames or decorative moldings.

CONSTRUCTION, CAPACITIES: Hardwood fences open 1 to 3 in. Independent fence adjustments. Fits most Craftsman Drill presses.

ORDERING INFO: Use with adapter (E) below.

9 GT 2486—Shpg. wt. 5 lbs. 8 oz. \$29.99

(E) Adapter with holding collar

For using shaper cutters with drill press.

CONSTRUCTION, CAPACITIES: Steel. Accepts 1/2-in. bore shaper cutters. 1/2-in. x 20-thread spindle. Fits drill presses on these 2 pages, most Craftsman, others with No. 33 Jacobs taper.

ORDERING INFORMATION: Order shaper cutters separately on page 125.

9 GT 24832—Shipping wt. 12 oz. \$5.29

(F) Hollow Chisels

Squares bit holes to make mortises. For (G) above right and former 9-2464.

SIZES, ORDERING INFO: Shpg. wt. 4 oz. each.

Catalog No	Size	Cut Depth	Each
9 GT 24201	1/2-in.	1 3/8-in.	\$7.99
9 GT 24202	3/8-in.	3-in.	8.49
9 GT 24203	1/2-in.	3-in.	8.49

Mortising Bits. For (F) below, left.

SIZES, ORDERING INFORMATION:

9 GT 24221—1/4-inch. Shpg. wt. 4 oz. ... \$5.99

9 GT 24222—3/8-inch. Shpg. wt. 4 oz. ... 6.49

9 GT 24223—1/2-inch. Shpg. wt. 4 oz. ... 6.99

(G) Mortising Chisel Housing

Holds hollow chisels (F) below, left. Fits most Craftsman drill presses with 1 1/8-inch or 1 1/2-inch diameter quill. Use with (P) below.

ORDERING INFORMATION:

9 GT 2465—Shipping wt. 4 lbs. 2 oz. ... \$14.50

(H) CRAFTSMAN Circle Cutters

CONSTRUCTION: Hex shaped bit holder graduated in 1/16-in. Bit of high speed ground tool steel. With set screw wrench. For use in drill presses or bit brace only.

SIZES, CAPACITIES, ORDERING INFO:

With 1/2-in. shank. Cuts 1 3/4 to 7 1/2-in. diam. circles in brass, aluminum, plastic, wood.

9 GT 3640—Shipping weight 14 oz. ... \$6.99

With 1/4-in. shank. Cuts 3/8 to 4-in. diameter circles in wood, brass and plastic.

9 GT 3645—Shipping weight 7 oz. \$3.99

(J) Dovetail Attachment

Make sturdy dovetail joints like those in drawers of fine cabinets.

CONSTRUCTION, CAPACITIES: Hardened steel. Clamp holds work pieces at 90° angle, bit cuts drawer front and side at same time. Also cuts flush or lipped joints. Slotted comb controls spacing, depth of cut. Includes end plates, comb screw fittings, clamps wood parts and operating and set-up instructions. For use with any drill press. Uses 1/2-in. Dovetail Cutter router bit (9 GT 25531) not included . . order separately on page 4.

ORDERING INFORMATION:

9 GT 2462—Shpg. wt. 3 lbs. 8 oz. \$21.99

Table mount drill press accessories for specialized, accurate metal and wood drilling

(K) Universal Compound Vise

Required for all types of drill press operations on small metal pieces in which holes, key slots, etc. must be accurately located, spaced or shaped. Adapts for use with lathe milling operations and grinders.

CONSTRUCTION CAP: Cast-iron. Jaws open to 4 1/2 inches. One jaw swivels; other jaw has movable face. 90 degree graduations. 7x7-inch table size overall . . 6-in. by 5-in. table travel. 4 3/4 in. high. With wrench. Bolts to drill press table . . bolts are included.

ORDER INFO: Wt. 35 lbs.

9 GT 2432C ... \$184.95

(L) Rotary Indexing Table

A precision machinists tool designed for layout, indexing, holding, drilling, milling, routing, shaping etc.

CONSTRUCTION, CAP: Cast-iron and steel. Jaws open to 4 1/2 in. Dial calibrated in 3-min. intervals to .001-in. tolerance. 8-in. diam. table rotates 360°. Bolts to table; bolts not incl.

ORDERING INFORMATION:

9 GT 2495L—Wt. 41 lbs. ... \$199.99

(M) Angle Vise with swivel base

For angle drilling or jobs where it's necessary to position vise jaws out from under drill chuck and bit.

CONSTRUCTION, CAP: Cast-iron, steel. Steel faced jaws open to 2 1/2 in. Vise adjusts from 0 to 90 degrees . . turns 360° on detachable swivel base. Vise can be used horizontally. Bolts to drill press table . . bolts not incl.

ORDERING INFORMATION:

9 GT 2752—Wt. 13 lbs. 7 oz. \$29.99

(N) Tilt Table

CONSTRUCTION, CAPACITY: Cast-iron. Indexes at 45 or 90 degrees left or right . . rotates and locks at any angle in between. 8 1/2 x 11 1/4 in. Mounts to back of existing table.

ORDER INFO: Wt. 12 lbs. 8 oz.

9 GT 2439 ... \$22.99

(P) Adjustable Hold Down and Guide

CONSTRUCTION, CAPACITY: Cast-iron. Hold down adjusts on post to accommodate work pieces up to 5 inches thick. Fits most drill presses. Bolts to table . . bolts not included.

9 GT 2457—Wt. 5 lbs. \$14.99

(R) General-purpose Vise

All-purpose type holding attachment designed for a variety of drilling operations.

CONSTRUCTION, CAPACITY: Steel and cast-iron. Steel faced jaws open to 3 inches wide. Cast-iron base is 8 inches long. Bolts to drill press table . . bolts are not included.

ORDER INFO: Wt. 8 lbs. 2 oz.


9 GT 2757 ... \$18.99

(S) Angle Vise. Same construction and capacities as (M) above but without swivel base.

Measures 9 inches long.

ORDER INFO: Wt. 9 lbs. 13 oz.

9 GT 2756 ... \$19.99

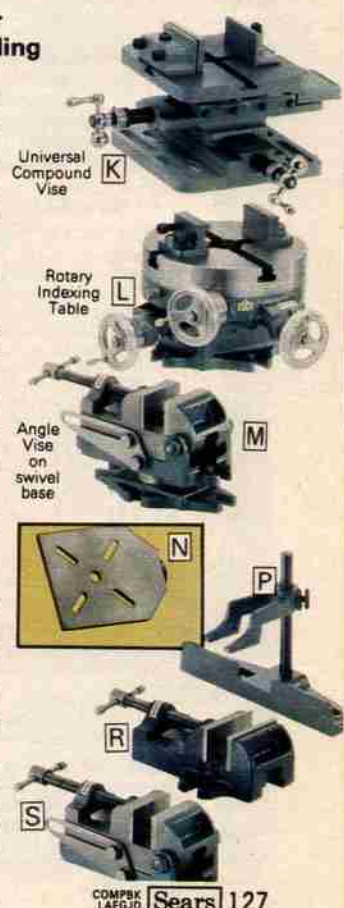

Shape your ideas into creative projects for hobby and home with this CRAFTSMAN® 12-inch Lathe

Here are just some of the possibilities:



Shape attractive wooden planters and bowls, plain or fancy discs and rims

Indexing feature lets you determine equal spacing as on this ship's wheel, for flutes, reeds on furniture legs

Turn plastics and soft metals. Do small turning projects such as chessmen, drawer knobs, rosettes and finials

With additional accessories, lathe can perform such operations as drilling, sanding and buffing

Lathe with Motor **\$189⁹⁵** | Lathe alone **\$149⁹⁵**

Lathe complete with Motor and Workbench.

MOTOR, SPEEDS: Capacitor-start, 1/2 HP, 1725 rpm motor (9 GT 1255C). Sleeve bearings. Four-step machine, motor pulleys let you choose speeds of 875, 1350, 2250, 3450 rpm. **CAPACITY, CONTROLS:** Turning capacity of 12-in. diameter over bed, 8-in. diameter over tool rest, 37 in. between centers. Hinged belt guard eases speed changes. . . side-mounted chart helps you select proper speed for the job. Up front hand levers let you lock tool rest, tool rest base, tail stock and ram in position. Tailstock slides along bed, hand wheel advances ram up to 1 3/8 in. Special index pin in head stock for settings to 36 equal spacings.

LATHE CONSTRUCTION: 19 1/2 x 12 x 54 1/2 in. long. Cast iron head, tailstock. Steel tubing bed 45 1/2 in. long; 2 1/4-in. diam. Spindle turns on permanently lubricated ball bearings.

WORKBENCH CONSTRUCTION: Legs and braces of 16-gauge steel. Flakeboard top 24x60x1 in. thick. Stands 34 in. high; leveling feet adjust 3/8-in. Baked gray finish.

ACCESSORIES: Includes four-step machine and motor pulleys, V-belt, 6 and 12-inch tool rests, spur and cup centers (No. 1 Morse taper), operating instructions. Order additional accessories below.

ELECTRICAL INFORMATION: Lathe has pull-on/push-off switch with key; 6-ft., 3-wire cord; UL listed. Motor runs on 115-volts, 60 Hertz, AC; 660 full-load input watts; 4-ft., 3-wire cord. Motor plugs into receptacle on lathe switch.

ORDERING INFORMATION: Workbench sent unassembled. See full one-year warranty for lathe on page 136. See full one-year warranty for motor on page 108.

9 GT 23813N3—Shipping weight 168 pounds\$219.95

Lathe with Motor. As above but without workbench.

ORDERING INFORMATION: 9 GT 23805N2—Shipping weight 101 pounds\$189.95

Lathe alone. As above but without motor, workbench.

ORDERING INFORMATION: 9 GT 2380N—Shipping weight 80 pounds\$149.95

Lathe complete with Motor and Workbench

\$219⁹⁵

(1 thru 12) Wood-turning Tools

CONSTRUCTION: Double-tempered high-speed steel blades measure 4 1/2 in. long. Precision-ground tips. Grooved 10-in. long hardwood handles for positive grip. Tools (9 thru 12) specially designed for internal turning of items such as bowls, plates, etc.

ORDERING INFORMATION:

- (1) 9 GT 28528—1-in. Skew Chisel. Wt. 11 oz.\$7.99
- (2) 9 GT 28527—1/2-in. Skew Chisel. Wt. 9 oz. 5.99
- (3) 9 GT 28526—1/2-in. Parting Tool. Wt. 8 oz. 5.99
- (4) 9 GT 28525—1/2-in. Round Nose. Wt. 9 oz. 5.99
- (5) 9 GT 28524—1/2-in. Spear Point. Wt. 9 oz. 5.99
- (6) 9 GT 28523—3/4-in. Gouge. Wt. 10 oz. 7.99
- (7) 9 GT 28522—1/2-in. Gouge. Wt. 9 oz. 6.99
- (8) 9 GT 28521—1/4-in. Gouge. Wt. 8 oz. 5.99
- (9) 9 GT 28531—Half-round. Wt. 12 oz. 7.99
- (10) 9 GT 28532—Full-round. Wt. 12 oz. 7.99
- (11) 9 GT 28533—Left Skew. Wt. 12 oz. 7.99
- (12) 9 GT 28534—Right Skew. Wt. 12 oz. 7.99

Complete 12-pc. Set of Wood Turning Tools.

ORDERING INFO: Includes (1 thru 12) above. 9 GT 2867—Shipping weight 6 lbs. 8 oz.Set \$64.88

8-pc. Set of Wood Turning Tools.

ORDERING INFO: Includes (1 thru 8) above. 9 GT 2859—Shipping weight 4 lbs. 2 oz.Set \$44.99

4-pc. Set of Spindle Turning Tools.

ORDERING INFO: Includes (1, 3, 4 and 6) above. 9 GT 2853—Shipping weight 2 lbs. 4 oz.Set \$24.99

4-pc. Set of Internal Turning Tools.

For turning items such as bowls, plates, etc. **ORDERING INFO:** Includes (9 thru 12) above. Shipping weight 2 pounds 6 ounces. 9 GT 2869Set \$26.88

(13 thru 26) CRAFTSMAN® Lathe Accessories

(13) Work Arbors with Chucks. Three-jaw screw-on. 1/2-inch capacity. 1/2-inch x 20-thread.

SIZES AND ORDERING INFORMATION: 9 GT 22344—No. 1 Morse taper. Wt. 1 lb. 8 oz.\$5.79 9 GT 22472—No. 2 Morse taper. Wt. 1 lb. 10 oz. 5.79

(14) Work Arbors. Comes complete with 2 steel flanges, nut on head for clamping wheels. 1/2-in. x 20-thread.

SIZES AND ORDERING INFORMATION: 9 GT 21534—No. 1 Morse taper. Wt. 11 oz.\$3.19 9 GT 21522—No. 2 Morse taper. Wt. 13 oz. 3.19

(15 thru 19) Morse Taper Centers.

TYPES, SIZES AND ORDERING INFORMATION:

- (15) 9 GT 21164—No. 1 Screw. Wt. 8 oz.\$3.79
- 9 GT 21152—No. 2 Screw. Wt. 12 oz. 3.89
- (16) 9 GT 21122—No. 1, 60° Ball Bearing. Wt. 11 oz. 6.29
- 9 GT 21132—No. 2, 60° Ball Bearing. Wt. 13 oz. 6.59
- (17) 9 GT 21082—No. 1 Spur. Wt. 6 oz. 2.89
- 9 GT 21072—No. 2 Spur. Wt. 9 oz. 3.69
- (18) 9 GT 21002—No. 1 Tailstock Cup. Wt. 5 oz. 2.79
- 9 GT 21012—No. 2 Tailstock Cup. Wt. 6 oz. 2.89
- (19) 9 GT 21102—No. 1 60-degree. Wt. 5 oz. 2.39
- 9 GT 21112—No. 2 60-degree. Wt. 6 oz. 2.89

Draw Bolt. Use to secure center (9 GT 21164) above and work arbor (9 GT 21534) above to lathe spindle.

ORDERING INFORMATION: Shipping weight 5 ounces. 9 GT 21542\$1.59

(20) Work Arbors. Convert motor to grinder, polisher. Each measures 3 3/8 inches long; 2 3/8-in. spindle. 1/2-in. x 20-thread. Steel flanges.

BORE SIZES AND ORDERING INFORMATION: Shipping weight each 14 ounces. 9 GT 21643—1/4-inch bore\$2.49 9 GT 21644—3/8-inch bore 2.49

(21 and 22) Lathe Centers.

Fit 3/8-inch unthreaded arbors. **TYPES AND ORDERING INFO:**

(21) **Headstock Spur.** 9 GT 21052—Shpg. wt. 7 oz.\$3.19

(22) **Tailstock Cup.** 9 GT 21022—Shpg. wt. 7 oz.\$2.89

(23) Sanding Plate. 9-in. diam.; 3/4-in. x 16-thread. Includes one pressure sensitive sanding disc.

ORDERING INFORMATION: 9 GT 24906—Wt. 1 lb. 2 oz.\$10.50

(24) 4-inch Face Plate. Cast iron. For 3/4-inch x 16-thread arbor. 6 holes. **ORDERING INFORMATION:** 9 GT 2489—Wt. 13 oz.\$8.50

4-in. Face Plate. As above except cast aluminum, 8 holes. **ORDERING INFORMATION:** 9 GT 23865—Wt. 1 lb. 4 oz.\$7.50

(25) 3-inch Face Plate. Cast iron. Spurs, removable center, screw center. For 3/4-inch x 16-thread spindle. **ORDERING INFORMATION:** 9 GT 20812—Wt. 1 lb. 4 oz.\$8.99

(26) Speed Reducer. Reduces 12-in. lathe speed to as low as 300 rpm with 1725 rpm motors. Adapts to NEMA motors with 48 or 56-frame. Cast aluminum with steel cover.

ORDERING INFORMATION: 9 GT 23895—Wt. 8 lbs. 2 oz.\$29.50

CRAFTSMAN® 12-inch Band Saw-Sander

Does free-form as well as straight-line cutting
in wood up to 6 inches thick, 12 inches wide
...sanding belt completes workpiece with
smooth finish; gets even into hard-to-reach crevices



Cuts bevel curves

Carves compound shapes

Resaws wood as thick as 6 inches

Performs elaborate spiral cuts



Fashions intricate designs

Cuts narrow kerfs to bend wood

Sands smooth most any cut

With speed reducer cuts metal

- Exclusive built-in light illuminates work area
- Cast-iron table tilts from horizontal to 45° for bevel cuts
- Also ideal for cutting materials such as insulation, cardboard, plastic, plastic foam, vinyl and asbestos tile

Band Saw-Sander alone

\$219⁹⁵

Band Saw-Sander with Motor, Legs

\$279⁹⁵

(1) Band Saw-Sander alone. Overall size: 38x26x14½ inches deep.
USES: Ideal for general-purpose sawing plus cutting of intricate shapes like table legs. Cuts stacks of wood for duplicating patterns. Also cuts plastic laminate, floor tile and more. Cuts metal with speed reducer sold below. Replace blade with sanding belt for fine finishing. See in-use views above.

DRIVE MECHANISM: Balanced, 12¼-in. drive and idler wheels spin freely on pre-lubricated ball bearings. Knob quickly adjusts belt tension. Micro-adjustable upper and lower blade guides with sight lines for accurate settings.

WORK TABLE: Cast iron construction. 14x12½ inches. Tilts 45° for bevel cuts.

CUTTING CAPACITY: Cuts wood up to 6 inches thick, 12 inches wide.

ACCESSORIES: Includes ¼x80-in. skip-tooth blade, ½x80-in. sanding belt (order extra belts below), sanding platen, machine and motor pulleys, belt, belt-pulley guard.

ORDERING INFORMATION: See Warranty on page 136.

9 GT 2435N—Shipping weight 78 pounds **\$219.95**

Band Saw-Sander above with Motor and Legs.

CAPACITOR-START ½-HP MOTOR: 1725 rpm, 115-v., 60-Hz. AC. 650 full-load input watts. Four-foot, 3-wire cord.

STEEL LEGS: With adjustable leveling feet, rubber pads. Sent unassembled.

ORDERING INFO: See Saw Warranty p. 136, Motor Warranty p. 108.

9 GT 2435 1N3—Shipping weight 126 pounds **\$279.95**

(2 and 3) Accessories for Band-Saw Sander

(2) Band Saw Rip Fence. Helps increase cutting accuracy. Use for ripping stock evenly at predetermined widths. Locks at front. Includes fittings. Tilts to 45° with positive stop.

ORDERING INFORMATION:

9 GT 23432—Shipping weight 4 pounds 2 ounces **\$18.99**

(3) Miter Gauge. For saw above, most other saws with ¾x¾-inch deep miter slots. Locks at any angle from 0° to 90° right or left. Positive stops at 0° and 45° left or right for quick settings.

ORDERING INFORMATION: Use with stop rods (9 GT 29924) sold on p. 110.

9 GT 29929—Shipping weight 3 pounds 2 ounces **\$15.50**

Replacement Sanding Belts for band-saw above (not shown). Each measures ½-inch wide, 80 inches long. Medium-fine surface. Package of 5.

ORDERING INFORMATION:

9 GT 22361—Shipping weight 9 ounces Package **\$2.79**

(4 and 5) Band Saw Replacement Blades

CONSTRUCTION: Alloy steel heat-treated, hardened for long wear and sharpness. Precision-ground for cutting accuracy. Each blade tension-tested for strength. Endless blades fit most any brand saw.

(4) Regular-tooth Blades.

SIZES, USES, ORDERING INFORMATION:

Catalog Number	For sawing	Width inches	Length inches	Teeth per in.	Wt. oz.	Each for	5 for
9 GT 26582	Wood, hardboard, plywood, chipboard*	¾	54	15	4	\$2.49	\$11.99
9 GT 26641	Wood	¾	62	6	5	2.99	14.20
9 GT 26642	Wood	¾	62	6	5	2.99	14.20
9 GT 26572	Wood*	¾	78	6	6	2.99	14.20
9 GT 26232	Wood	¾	80	6	6	2.99	14.20
9 GT 26233	Wood	¾	80	6	7	2.99	14.20
9 GT 26234	Wood	¾	80	6	8	2.99	14.20
9 GT 26592	Plywood	¾	80	15	4	2.99	14.20
9 GT 26593	Plywood	¾	80	15	6	2.99	14.20
9 GT 2624	Brass, non-ferrous metals	¾	80	10	6	3.49	16.60

*Fine-tooth for minimum splintering, smooth finish.

Steel-cutting Blades. As (4) except only for use when band saw operates with speed reducer.

SIZES, USES, ORDERING INFORMATION:

Catalog Number	For sawing	Width inches	Length inches	Teeth per in.	Shpg. wt.	Each for	5 for
9 GT 26255	Steel	¾	54	24	4 oz.	\$3.49	\$16.60
9 GT 2625	Steel	¾	80	14	6 oz.	4.99	23.70

(5) Skip-tooth Blades. For extra-fast wood cutting.

SIZES, USES, ORDERING INFORMATION:

Catalog Number	For sawing	Width inches	Length inches	Teeth per in.	Shpg. wt.	Each for	5 for
9 GT 26595	Wood	¾	80	4	5 oz.	\$2.99	\$14.20
9 GT 26596	Wood	¾	80	4	7 oz.	2.99	14.20
9 GT 26597	Wood	¾	80	4	8 oz.	2.99	14.20

(6) Speed Reducer **\$74⁹⁵**

Reduces band saw blade speed to approx. 135 ft. per min. . . 21.5 to 1 reduction. Allows use of metal-cutting blades to cut non-ferrous metals, brass, steel. Steel construction; for use with 1725 rpm motor only (not incl.). . . motor mounts on reducer. Includes mounting bracket, adjusting rod. Fits most Craftsman 12-in. band saws, saw (1) above. Use with legs (9 GT 22236), part of set above or sold separately p. 112, or stand (9 GT 22213) sold on p. 112.

ORDERING INFORMATION:

9 GT 23896—Wt. 14 lbs. 6 oz. **\$74.95**

COMPBK LAEGJD **Sears 129**



Compact Bench Tools

• Perform most of the tasks our larger bench tools can
• Require little space... no more than a 2x5-foot work area



\$79⁹⁹

(1) 11-inch Drill Press
HEAD CONSTRUCTION: Cast-iron one-piece head swivels up to 45° left or right for angle drilling. Pre-lubricated sleeve bearings. Belt guard.
COLUMN, BASE: 1½-in. diam. 14-ga. steel column. 6x9-in. cast-iron base with mounting holes.
CAPACITIES: Drills to center of 32-in. wide stock. Depth scale graduated in 16ths-in. Chuck takes bits with ¼-in. shank. Spindle 16 in. from column. Geared chuck travels 2 in. Overall: 8½x22x23 in. high.
ACCESSORIES: Chuck; V-belt; 3-step machine, motor pulleys.
ORDER INFO: Order motor 9 GT 1253C (p. 108), stand, bits (p. 118) separately.
9 GT 2397C—Wt. 30 lbs. ... \$79.99



\$59⁹⁹

(2) 8-inch Table Saw
BLADE, CAPACITY: Kromed® 8-in. combination blade fits ⅝-in. arbor, cuts wood to 2½ in. thick at 90°, 1¼ in. thick at 45°. Bevel scale shows degree of blade tilt. Positive stops at 90°, 45°. Table surface in front of blade at 1-in. cutting depth is 5 in. Rip fence positions to right or left of blade for rips to 5 in. wide, 10 in. with extension.
(3) Rip scale marked in ¼-in. increments.
TABLE: Cast-iron, 10½x13 in. wide.
ACCESSORIES: Blade guard, rip fence, miter gauge, V-belt, machine and motor pulleys.
ORDER INFO: Extensions, motor 9 GT 1253C (p. 108), stand sold separately.
9 GT 2412C—Wt. 26 lbs. ... \$59.99



\$59⁹⁹

4½-inch Jointer-Planer

\$59⁹⁹

(4) 4½-inch Jointer-Planer
CONSTRUCTION, CAPACITY: Cutter head spins on permanently-lubricated ball bearings. 3 steel blades plane up to 4 in. wide. Cast-iron 1-pc. bed 21½x4½ in. Out- and in-feed tables 4x10 in., adjust to ¼-in. max. depth of cut. Aluminum fence with calibrations for beveling to 45°. Overall: 8½x24x7 in. high.
ACCESSORIES: V-belt; machine, motor pulleys; guards.
ORDERING INFO: Order motor 9 GT 1253C (p. 108), stand, mount separately. Shpg. wt. 19 lbs.
9 GT 2187C ... \$59.99

(5) Belt-Disc Sander
CONSTRUCTION: Cast-aluminum 4x9-in. disc table tilts, locks at any angle horizontal to 45° for bevel sanding. Uses ¼-in. shaft accessories. Cast-iron 4x12-in. belt table. Belt tilts, locks horizontal to vertical. Adjustable belt tension, tracking. Drive shaft, pulleys turn on permanently lubricated sleeve bearings. Overall: 4x22x7 in. high.
ACCESSORIES: V-belt; machine, motor pulleys; 6-in. disc; 4x36-in. belt.
ORDERING INFO: Order extra discs and belts (p. 20), motor 9 GT 1253C (p. 108), mount, stand separately. Shpg. wt. 17 lbs.
9 GT 2264C ... \$59.99

CRAFTSMAN Stand for tools (1, 2, 4, 5)

\$22⁹⁹

(6) Steel Stand for (1, 2, 4, 5). Top 21½x16½ inches. Adjusts from 26 to 34 inches high.
ORDERING INFO: Unassembled. Shpg. wt. 23 lbs.
9 GT 22219C ... \$22.99



\$59⁹⁹



Speed Reducer for Lathe (7)

Workbench for (7) sold on p. 122

(7) 12-inch Lathe.
CAPACITY: 3-step machine motor pulleys for speeds of 850, 1725, 3450 rpm. Maximum 12-in. swing, 6 in. from center of spindle to bed. 36 in. between centers. Makes 36 equal spacings.
CONSTRUCTION: Cast-iron head, tailstock. Steel tubing bed. Permanently-lubricated ball bearings. Ball thrust cup center. 49½x7x10½ in. high.
ACCESSORIES: 3-step machine, motor pulleys; V-belt; tool rest; spur; cup centers; instructions.
ORDERING INFO: Order motor 9 GT 1253C (p. 108), workbench (p. 122) separately.
9 GT 2387L—Shpg. wt. 28 lbs. ... \$59.99

(8) Speed Reducer for Lathe (7).
Reduces lathe speed to as low as 300 rpm with 1725-rpm motors, to 600 rpm with 3450-rpm motors. Adapts to NEMA 48- or 56-frame motors. Cast aluminum construction with steel cover.
ORDERING INFORMATION:
9 GT 2389S—Wt. 8 lbs. 2 oz. ... \$29.50
Draw Bolt. For speed reducer above. ¼-in. x 20-thread spindle.
ORDERING INFORMATION:
Shipping weight 5 ounces.
9 GT 2154Z ... \$1.59

CRAFTSMAN® Scroll Saw Sander

\$54⁹⁵



Accessory Kit for Scroll Saw Sander

\$19⁹⁵

(10) Accessory Kit. 36-inch shaft attaches to power take-off for fingertip control. With 5 blades, 3 sanding discs; drum sander; 3 extra bands; 2 grinding wheels, drill bit, high-speed cutter, 2 bristle brushes, polishing compound, buffing wheel, 3 collets, wrench.
ORDERING INFORMATION:
9 GT 2471—Shpg. wt. 1 lb. 8 oz. ... Kit \$19.95

(9) CRAFTSMAN Scroll-Saw Sander.

For intricate scrollwork on small work pieces. Cut wood, plastic, non-ferrous metal. Blade turns 45° left or right.
MOTOR, BEARINGS: Ball-bearing motor runs at 3450 strokes per minute, transfers power to blade without V-belt.
TABLE: Steel, 8x9½ in. with grid marked every ½ inch. Locking table tilts to 45° right or left for bevel cuts.
CONSTRUCTION: Steel body, throat. 15-in. throat depth.
ACCESSORIES: Includes 4-in. disc sander, four 3-in. pin-end blades, self-adjusting blade guard.
ELECTRICAL INFORMATION: 80-w., 110-120-v., 60-Hz. AC. UL listed. 5-ft., 3-wire cord.
ORDERING INFO: See warranty on page 135.
9 GT 2472C—Wt. 17 lbs. ... \$54.95

SAFETY NOTE: Wear safety goggles when operating bench power tools... see p. 35.

Alloy-steel Jig Saw Blades

11 12 13 14 15 16

(11 thru 16) CRAFTSMAN Alloy-steel Jig Saw Blades.
Heat treated, 6-inch plain-end blades snap off to fit saws taking shorter plain-end blades. Use only designated blades for metal cutting, lubricate blade with beeswax. Sabre-saw blades can be used on jig saws for heavy work. Package of five.
TYPES, USES, SIZES AND ORDERING INFORMATION:

Item	Catalog Number	Length inches	Width inches	Thick inches	Teeth per in.	Use for	Wt. oz.	Per pkg.
Pin-type blades								
(11)	9 GT 26877	3	.065	.010	25	Wood, fine cut	2	75c
	9 GT 26878	3	.187	.015	15	Wood, fast cut	2	89c
	9 GT 26871	4	.065	.010	18	Wood, plywood	2	49c
(12)	9 GT 26873	5	.110	.020	15	Wood or metal	3	65c
	9 GT 26881	6	.110	.020	15	Wood or metal	2	89c
Plain-end Blades (for most jig saws)								
	9 GT 26874	5	.110	.020	15	Wood or metal	3	75c
	9 GT 26883	6	.110	.020	15	Wood, fine metal	3	89c
(13)*	9 GT 26885	6	.110	.020	10	Wood, coarse metal	3	89c
(14)	9 GT 26884	6	.110	.020	20	Thin sheet metals, including steel	3	89c
For use with former 9-2072N as sabre saw								
(15)*	9 GT 26888	6	.250	.028	20	Wood and metal	3	\$1.15
(16)	9 GT 26887	6	.187	.028	10	Wood, soft metal	3	1.15

*Blade (13) narrower than shown
*Blade (15) wider than shown

CRAFTSMAN® Radial Saws give you the versatility of several power tools, *plus* they bevel, miter, crosscut and rip



Route*

Drum sand*

Plane*



Dado*



Mold*



Shape*



10-inch Radial Saw with rear-mounted controls develops 2-HP

Saw alone **\$214.95**

Save \$9.99

Separate prices total **\$259.94**

Saw with steel stand **\$249.95** Outfit

10-inch Radial Saw alone.

MOTOR: Capacitor-start, 3450 rpm develops 2HP . . . manual blade brake. Double-end shaft, 3/4 in. blade arbor 1/2x20 in. threaded acc. end.

CUTTING BLADE AND CAPACITIES: 10-in. Kromedge® blade. Rear mounted depth, miter controls. Blade and motor swivel for up to 25-in. wide out-ripping . . . crosscuts to 13 1/2 in. wide in 3/4 in. stock. Maximum depth of cut is 3 in. at 90°, 2 1/4 in. at 45°. Miter arm has fixed stops at center, 45° right or left, fixed bevel stops at vertical, 45°, horizontal. Blade guard with spreader. Anti-kickback pawls.

CONSTRUCTION: Motor carriage moves on sealed ball bearings along steel trackways. Column of cast-iron with cast aluminum arm and column support. Work table resin bonded under pressure to resist wear and warping . . . 26x37 1/2x3/4 inch thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable key. Runs on 120-volt, 60-Hz., AC. 1200 full load input watts. Six-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: Accepts 7 inch diameter, 1 3/16 inch width dado (not included, see page 113). See Warranty on page 135.

9 GT 2316N—Wt. 105 lbs. **\$214.95**

10-inch Radial Saw with Steel Cabinet Stand

Includes saw described above plus heavy-gauge steel stand described on page 112 (9 GT 22202L). Measures 24x25x32 3/4 inches high. Leg levers adjust to uneven or sloping floors. Baked charcoal gray enamel finish.

ORDERING INFORMATION: Stand sent unassembled. Order optional casters, sold separately on page 112. 9GT23163N2—Wt. 157 lbs. **\$249.95**

10-inch Radial Saw with front-mounted controls and manual blade brake develops 2-HP

Saw alone **\$244.95**

Save \$17.48

Separate prices total **\$322.43**

Saw with stand, light drawers and casters **\$304.95** Outfit

10-inch Radial Saw alone.

MOTOR: Capacitor-start, 3450-rpm motor develops 2-HP . . . has manual blade brake. Double-end shaft with 3/4-in. blade arbor and 1/2x20 in. threaded end for mounting accessories.

CUTTING BLADE AND CAPACITIES: 10-inch Kromedge® blade. Depth of cut, miter and bevel controls mounted up front. Blade and motor swivel for up to 25-in. wide out-ripping. Crosscuts up to 15 in. wide in 3/4-in. stock. Maximum depth of cut is 3-inches at 90° and 2 1/4-in. at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader. Anti-kickback pawls.

CONSTRUCTION: Motor and carriage glide along steel carriage on sealed ball bearings. Cast-iron arm, column and column support. Work table resin bonded under pressure to resist wear and warping . . . measures 26x37 1/2x3/4-inch thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with locking key. Runs on 120-v., 60-Hz., AC. 1200 full-load input watts. Six-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: Accepts 7-inch diameter 1 3/16-inch width dado (not included). Warranty on page 135.


9 GT 2311N—Shpg. wt. 170 lbs. **\$244.95**

10-inch Radial Saw with Steel Cabinet Stand, Worklight and Casters

Includes saw described above plus the following accessories described on page 112. Heavy gauge steel cabinet stand . . . measures 24x25x32 3/4 in. high (9 GT 22202L). Adjustable leveling feet conform to uneven or sloping floors. Cabinet in baked charcoal gray enamel finish. Worklight with 18 inch flexible neck (9 GT 2480). Set of 4 casters for extra mobility (9 GT 22201).

ORDERING INFORMATION: Stand sent unassembled.

Shipping weight 232 pounds. 9 GT 2311N4 **\$304.95**

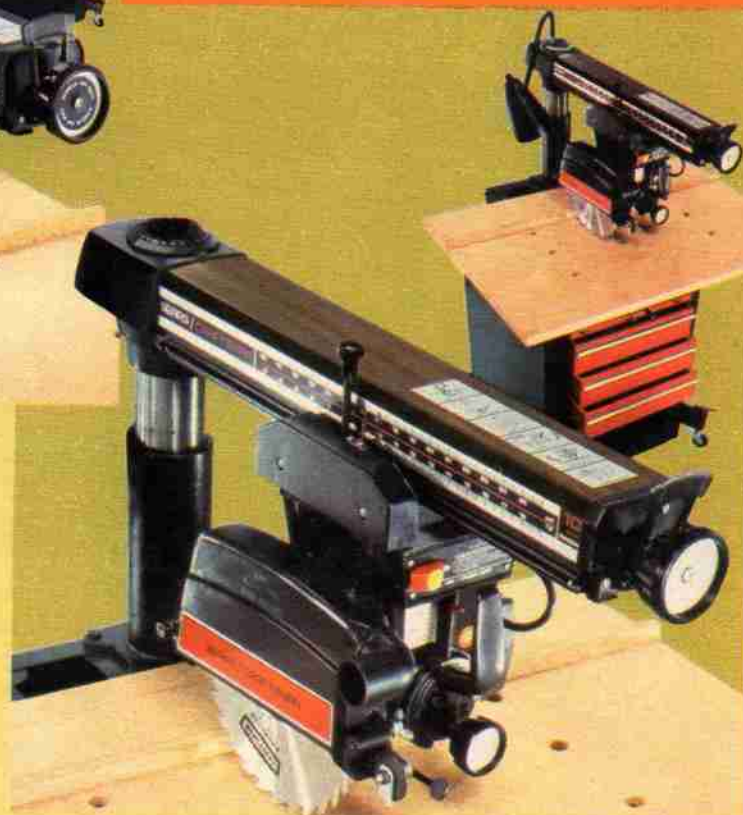

Our finest 10-inch Radial Saw develops 2 1/2 HP, has easy-to-reach, up-front controls, automatic blade brake, sturdier construction

Saw alone **\$349.95** Separate prices total **\$476.94** Saw with light, stand, locking front panel, drawers and casters **\$439.95** Outfit

10-inch Radial Saw alone.

MOTOR: Capacitor-start, 3450 rpm motor develops 2 1/2-HP. Overload protector guards against burnouts. Double-end shaft with 3/4-in. blade arbor and 1/2x20 threaded end for mounting accessories. Automatic blade brake.

CUTTING BLADE AND CAPACITIES: Depth of cut, bevel and miter controls mounted up front. Blade and motor swivel for up to 25 1/2-in. out-ripping. Crosscuts up to 15 1/2 in. wide in 3/4 in. stock. Maximum depth of cut is 3 in. at 90°, 2 1/4 in. at 45°. Fixed miter stops at center and 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader helps check blade binding. Anti-kickback pawls help prevent wood from jumping back at operator.

CONSTRUCTION: Motor and carriage glide smoothly along steel trackways on sealed ball bearings. Extra-tough cast iron arm, column and column support. Work table resin bonded under pressure to resist wear and warping . . . measures 27x40x1-inch thick.

ELECTRICAL INFORMATION: Pull-on/push-off switch with removable locking key. Factory wired for 120 v., 60-Hz., AC . . . change quick-connect terminals and replace plug with 240-v. type to use 240-v., 60 Hz., AC. UL listed. Six-foot, 3-wire cord. 1050 full load input watts.

ORDERING INFORMATION: Uses 8-inch diameter, 1 3/16-in. width dado (not included, see page 113). Handy work function chart plus adjustable miter, bevel and in-out rip scales. See Warranty on page 135.

9 GT 2310N—Shipping weight 180 pounds **\$349.95**

Complete Outfit. Includes saw above plus the following accessories described on page 112. Worklight with 18 in. flexible neck (9 GT 2480). Steel stand with locking front panel and 3 drawers (9 GT 22203N). Set of 4 casters for extra mobility (9 GT 22201).

ORDERING INFORMATION: 9 GT 23105N4—Shipping weight 305 pounds **\$439.95**

*See index for proper accessories to perform these operations.



Exclusive Exact-I-Cut shows you where the wood will meet the blade . . . means no trial and error cutting or waste

A Table Saw

*Sears * Best*

12-INCH TABLE AND RADIAL SAWS

Like all our finest-quality tools, they had to earn the right to wear the name

CRAFTSMAN[®]

Here's what makes these two saws so outstanding:

- 1** Built-in motors develop $3\frac{1}{2}$ -HP . . . direct drive so there are no meshed gears to create extra noise and drain power, no motor brushes to replace. Saws run quietly, require little maintenance
- 2** Big 12-inch saw blades for cutting thick stock . . . table saw handles wood up to $3\frac{3}{16}$ in. thick, radial saw handles wood up to 4 inches thick
- 3** Large size work surfaces . . . table saw has a 20x27-inch work table plus two 10x20-in. extensions, radial saw table measures 29x44x1-in. thick

*Sears * Best*

B Radial Saw

**(A) Motorized Table Saw
with two solid type extensions
and steel legs**

\$449⁹⁵

CUTTING BLADE, CAPACITIES: 12-inch Kromedge® blade cuts wood up to 3 1/8-inch thick at 90°, 2 3/8-inch thick when tilted to 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90°, 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 16 inches wide. Self-aligning rip fence positions to right of blade for rips up to 24 inches wide. Rip scale graduated in 1/16-inch increments. See-thru blade guard. Spreader helps check blade binding in wood. Anti-kickback pawls.

TABLE: Machine ground cast-iron, 20x27 inches. Exclusive Exact-I-Cut shows you where wood will meet the blade.

EXTENSIONS: Two included. Solid-type formed steel. Each measures 10x27 inches. Attach to both sides of table for a total work surface area of 40x27-inches. Attaching hardware included.

LEGS: Sturdy steel. Positions saw table at proper working height. Rubber padded leveling feet resist creeping during use, adjust to uneven or sloping floors. Sent unassembled. Caster set for legs sold separately below.

MOTOR: Capacitor start, 3450-rpm motor develops 3 1/2-HP. Permanently lubricated ball bearings. Manual reset overload protector guards against burnouts.

ELECTRICAL INFO: Pull-on/push-off power switch with locking key. 240-v., 60-Hz., AC. 1650 full load input watts. 6-ft., 3-wire cord. UL listed.

ORDERING INFO: See warranty on page 135.

9 GT 2418N—Shipping weight 226 lbs. \$449.95

Combination Dado/Molding Head Insert. (Not shown). For 12-in. table saw above. Provides proper size opening in table for using 7-inch diameter dado or molding heads on saw blade arbor.

ORDERING INFORMATION:

9 GT 29995—Shipping weight 1 lb. 10 oz. \$6.50

**(B) Radial Saw with
easy-to-reach up-front controls**

\$449⁹⁵

CUTTING BLADE, CAPACITIES: 12-in. Kromedge® blade. Retractable lower blade guard. Depth of cut and miter controls located up front. Blade and motor swivel 360° for up to 26-in. wide out-ripping. Cross-cuts up to 16 in. wide in 3/4-in. stock. Maximum depth of cut is 4 in. at 90°, 2 1/16 in. at 45°. Fixed miter stops at center, 45° right or left; fixed bevel stops at vertical, 45° and horizontal. Blade guard with spreader. Anti-kickback pawls.

ARM CONSTRUCTION: Motor and blade carriage ride on four permanently lubricated ball bearings. Cast-iron arm, column, column support.

WORK TABLE: Chipboard. . . resin bonded under pressure to resist wear, warping. Measures 29x44x1-inch thick.

MOTOR: Capacitor-start, 3450-rpm, develops 3 1/2-HP. Thermal overload protector. Double-end shaft with 3/8-inch blade arbor and 1/2x20-threaded accessory end.

ELECTRICAL INFO: Pull-on/push-off power switch with locking key. 240-v., 60-Hz., AC. 1650 full load input watts. 6-ft., 3-wire cord. UL listed.

ORDERING INFO: See warranty on page 135.

9 GT 2330N—Shipping weight 218 lbs. \$449.95

Legs for radial saw. (Not shown.) Steel . . . provide steady support, proper working height for radial saw above. Rubber padded leveling feet resist creeping during use, adjust to sloping or uneven floors. Baked charcoal gray enamel. Sent unassembled. Caster set for legs sold separately below.

ORDERING INFORMATION:

9 GT 22211C—Weight 35 pounds . . . Set \$27.99

Caster Set. (Not shown.) Fits legs included with table saw or legs for radial saw sold above. Mount on inside. 2-in. diam. front casters swivel. . . have T-handle for raising and lowering; rear 3-in. diam. casters are rigid. Plastic wheels in steel frame.

ORDERING INFORMATION:

9 GT 22209—Weight 6 lbs. 5 oz. . . . Set \$19.50

**Industrial-type
12-inch Radial Saw**

Direct-drive, totally enclosed
fan cooled motor powers
blade through wood
up to 4 inches thick

12-inch saw with
built-in motor
and steel stand

\$795⁰⁰



A big-capacity production-type woodworking saw designed to withstand continuous use in factories, commercial workshops, industry or schools where 3 phase electrical power is available for use

CUTTING BLADE, CAPACITIES: 12-in. blade. Lower blade guard. Rear-located depth of cut and miter controls. Blade and motor swivel for up to 27-in. wide out-ripping. Crosscuts up to 16-in. wide in 1-in. stock. Maximum depth of cut is 4-in. at 90°, 2 1/4-in. at 45°. Fixed miter stops at vertical, 45° and horizontal. Anti-kickback pawls help prevent wood from kicking back towards operator. Automatic blade brake.

ARM CONSTRUCTION: Motor and blade carriage ride on 4 permanently lubricated ball bearings in 2 machined tracks. Cast-iron arm and column support. Column is cadmium plated.

WORKTABLE: Chipboard, measures 29 3/8x38 1/2x1-inch thick.

STAND: Steel. Top measures 26x32 inches. Positions saw worktable 33 inches from floor. Gray wrinkle finish.

MOTOR: 3450-rpm, develops 5-HP. Totally enclosed, fan cooled. Thermal overload protector . . . low voltage protector meets OSHA requirements. 3/8-inch blade arbor accepts sanding discs, dadoes, molding heads, see index for these and other accessories.

ELECTRICAL INFORMATION: Push button magnetic-type power switch with key lock (key included). Factory wired for 208-240 volt. . . can be rewired for 208-240/480 volt, 60-Hertz, AC. With 8-foot, 3-wire cord.

ORDERING INFORMATION: Saw is shipped from Atlanta, Chicago, Dallas, Los Angeles or Philadelphia distribution centers only. Pay motor carrier charges from your catalog merchandise distribution center. Allow extra time for delivery. Wt. 265 lbs.

T9 GT 2319N \$795.00

(1) CRAFTSMAN® Motorized Miter Box

\$189⁹⁹

CUTTING RANGE: 90° cuts in 2 1/4x4-inch stock, 45° cuts in stock up to 2 1/2x3 3/8 inches.

BLADE: 9-inch Kromedge steel with 44 teeth.

BLADE HOUSING, BASE: Fixed stops at 90°, 45° right or left . . . blade locks at any angle in between. Marked in 1° graduations. Adjusts for depth of cut . . . locks in position. Quick-return spring on head. Shrouded drive belt, plastic see-thru blade guard. Cast-iron base, particle board cutting surface. Trigger-grip handle on base, manually operated brake stops blade. Overall: 17 1/2x21x21 1/2-in. high. Blade wrenches, operating instr. incl.

MOTOR: Single-phase . . . develops 1.6-HP. Permanently lubricated ball bearings. Externally accessible motor brushes.

ELECTRICAL INFO: 115-v., 60-Hz. AC. 10.5 amp. 1200-w. 6-ft., 3-wire cord. UL listed.

ORDERING INFORMATION:

9 GT 2375L—Shpg. wt. 47 lbs. . . \$189.99

Extra Blade. As in (1) above.

9 GT 32405—Wt. 1 lb. 10 oz. . . . \$4.99

(2) Steel Stand. Height adjusts from 26 to 34-in. Rubber padded leveling feet resist creeping, adjust to uneven floors.

ORDERING INFO: Sent unassembled.

9 GT 22219C—Shpg. wt. 23 lbs. . . \$22.99



**Sears Has a Credit Plan
to Suit Most Every Need**

See Big Book or ask for details

CRAFTSMAN® 10-in. Table Saws with built-in accuracy for miters, bevels,

Accessories for these specialized woodworking operations are available from this catalog on the pages indicated. Order our Power Hand Tool Know How Handbook below for instructions on over 600 woodworking operations you can do with the proper Craftsman power tools and accessories



Decorative edges... molding head and individual bits sold on page 113.

Tenon cuts for joining wood... order universal jig on page 110.

Dado cuts for making box joints... order dado sets on page 113.

Cove cuts for decorative moldings or rounded corners... require no accessories.

Exclusive Exact-I-Cut indicator in front of blade shows you where wood will meet the blade... means no trial and error cutting of wood



Our finest 10-inch Table Saw cuts thru wood up to 3 3/8-in. thick

Deeper cuts, wider table surface in front of blade and larger table surface than saw on facing page

Sears Has a Credit Plan to Suit Most Every Need

See Big Book or ask for details



Power Tool Know How Handbook

Contains instructions for over 600 woodworking operations, including those shown at the top of these two pages. Includes sections on the operation and use of table saws, band saws, drill presses, wood lathes and shapers, stationary sanders and planers, motorized miter boxes and tool sharpening. Black and white illustrations. Spiral bound with blue vinyl cover. 207 pages.

ORDERING INFORMATION:
9 GT 2918—Shipping weight 14 ounces\$4.99

Saw alone
\$249⁹⁵

Saw with motor that develops 2-HP, two extensions and stand
Sep. prices
total **\$364.92** **\$339⁹⁵**

(1) 10 inch Table Saw alone

CUTTING BLADE, CAPACITIES: 10-in. combination blade cuts wood up to 3 3/8-in. thick at 90°, 2 1/4-in. thick at 45°. Blade and motor mount tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90 and 45 degrees. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-in. cutting depth is 15 1/4-in. wide. Self-aligning rip fence positions to right of blade for rips up to 24-in. wide. Rip scales graduated in 1/16-in. increments. See-thru blade guard. Spreader helps check blade binding in wood. Anti-kickback pawls.

TABLE: Cast-iron work table. Measures 20x27 inches. **EXTENSION:** Solid type formed steel. Measures 10x27 inches. Attaching hardware included.

ELECTRICAL INFO: Pull-on/push-off locking power switch. Has receptacle for 115-v. 3-prong motor plug (motor not included). 6-ft., 3-wire cord.

ORDERING INFORMATION: See warranty on page 135.

9 GT 29914N—Shipping weight 146 pounds.....\$249.95

(1 thru 3) Complete Outfit. Includes saw, one extra extension for total of two, stand, 3450-rpm motor.

STAND: Same as stand (3) described on page 135.

MOTOR: Capacitor-start 3450-rpm motor develops 2-HP. With sleeve bearings.

ELECTRICAL INFORMATION: 120-v., 60-Hz., AC. 1250 full load input watts. With 4-ft., 3-wire cord.

ORDERING INFORMATION: See tool warranty on page 135, motor warranty on page 108.

9 GT 29916N4—Complete Outfit. Wt. 214 lbs.\$339.95

9 GT 29957C—(2) Extension alone. Wt. 15 lbs. 19.99


9 GT 22214C—(3) Stand alone. Wt. 32 lbs. 32.99

Combination/Molding Head Insert. For saw (1) above. Provides opening for 7 inch diam. dado or molding head.

ORDERING INFORMATION:

9 GT 29994—Shipping weight 1 pound 15 ounces ..\$6.99

rips or crosscuts *plus* versatility for more specialized jobs like these

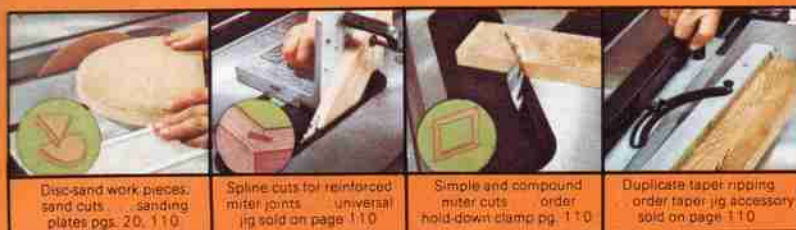

FULL ONE-YEAR WARRANTY ON CRAFTSMAN BENCH STATIONARY TOOLS

If, within one year from date of purchase, any CRAFTSMAN Stationary Power Tool fails due to a defect in material or workmanship, we will repair it free of charge. This warranty service is available by simply contacting any Sears store or Service Center throughout the U.S.

10-inch Motorized Saw cuts thru wood up to 2 1/2-in. thick

Direct drive built-in motor develops 2-HP, runs quietly with no noisy gears or motor brushes to repair or replace



Motorized saw alone

\$224⁹⁵

Motorized saw with 2 extensions and stand

Sep. prices **\$279⁹⁵** Complete outfit

(1) Motorized saw alone

CUTTING BLADE, CAPACITIES: 10-in. combination blade cuts wood to 2 1/2-in. thick at 90°, 2 5/16-in. when tilted to 45°. Blade, motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90°, 45°. Aluminum miter gauge slides in grooves on either side of blade. Table in front of blade at 1-in. cutting depth is 10-in. wide. Self-aligning rip fence positions to right of blade for rips up to 24-in. Rip scales graduated in 1/16ths. in. See thru blade guard. Spreader helps check binding in wood. Anti-kickback pawls.

TABLE: Cast-iron, 17x20-in. MOTOR: Capacitor-start, 3450-rpm motor develops 2-HP. Permanently lubricated ball bearings. Manual reset overload protector.

ELEC INFO: Pull-on/push-off lockable switch, 120-v., 60-Hz. AC, 6-ft. 3-wire cord, 1070 full load input watts. UL listed.

ORDER INFO: Warranty above. Shipping weight 95 lbs. 9 GT 2404N \$224.95

(1 thru 3) Complete Outfit.

Incl. saw, two extensions, stand. EXTENSIONS: Solid-type formed steel, 10x20-in. With attaching hardware.

STAND: Stamped steel with rubber padded leveling feet. . . adjust to unlevel or sloping floors. Sent unassembled.

ORDERING INFO: Wt. 148 lbs. 9 GT 24043N4 \$279.95

(2) Extension alone.

Shpg. wt. 10 lbs. 8 oz. 9 GT 29954 \$19.99

(3) Stand alone. Wt. 32 lbs.

9 GT 22214C \$32.99

(4) Caster Set. For (3). Phenolic plastic wheels in steel frames. 2 1/2-in. front casters swivel, T-handle for height adjustment. Rigid 3-in. rear casters.

ORDER INFO: Wt. 6 lbs. 8 oz. 9 GT 22201 Set \$19.50

Dado/Molding Head insert. For (1). Provides proper size opening for 7-in. dado and molding heads.

ORDERING INFO: Wt. 2 lbs. 2 oz. 9 GT 29933 \$6.99

7 1/2-in. Motorized Saw . . . cuts thru wood up to 1 5/8 inch thick, motor develops 1-HP **\$154⁹⁵**

Saw with two extensions and legs

An ideal table saw for the beginning woodworker or for light duty home shop work, trimming wood and hobby-type projects.

CUTTING BLADE, CAPACITIES: 7 1/2-in. combination blade cuts wood up to 1 5/8-in. thick at 90° and 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-in. cutting depth is 6 1/4-in. wide. Adjustable rip fence positions to the right of blade for up to 9 1/2-in. wide rips. Aluminum blade guard. Spreader helps prevent blade binding. Anti-kickback pawls. Dado insert (9 GT 24211) for using 6-inch diameter dado sets and molding insert (9 GT 24212) for using 5 3/8-inch diameter molding heads available on page 110.

TABLE: Cast aluminum, measures 14x14 inches wide.

EXTENSIONS: Two included. Formed aluminum . . . 6x14-inches each. Attach one to both sides of saw table for a total surface measuring 14x26 inches. Attaching hardware included.

LEGS: Sturdy steel. Provide approximately 37-in. table height. Rubber padded leveling feet resist creeping, adjust to unlevel or sloping floors. Sent unassembled. Order caster set (4) above to give saw roll-about mobility.

MOTOR: Induction run, 3450-rpm direct-drive motor with permanently lubricated ball bearings.

ELECTRICAL INFORMATION: Pull-on/push-off lockable power switch, 120-volt, 60-Hertz, AC, 880-full load input watts, 6 foot, 3 wire cord. UL listed.

ORDERING INFORMATION: See warranty above. 9 GT 24151L—Shipping weight 54 pounds \$154.95



OUR LOWEST PRICE EVER FOR ANY COMPLETE 9-INCH TABLE SAW OUTFIT

\$159⁹⁹

Complete outfit:
Motorized saw,
2 table extensions
and steel legs

Like all our finest-quality tools,
it had to earn the right to
wear the name

CRAFTSMAN[®]

Here's what makes this
table saw outfit so outstanding:

- ① Built-in motor develops 1.6-HP... direct drive so there are no meshed gears to create extra noise and drain power; no motor brushes to replace. Saw motor runs quietly, requires very little maintenance.
- ② Nearest aluminum table with lightweight like smaller saws, yet you get the cutting capacities of a 9-in. saw blade... cuts thru wood up to 2 in. thick
- ③ Two sturdy formed steel 10x20 inch extensions provide additional work surface... give you a total work surface area of 37x20 inches
- ④ Steel legs provide sturdy support, proper working height for saw... have adjustable rubber padded leveling feet to resist creeping, marring of floors
- ⑤ Full one-year warranty... see full details below.

CUTTING BLADE, CAPACITIES: 9-inch combination blade cuts wood up to 2 inches thick at 90°, 1½ inches thick when tilted to 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90° and 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 11½ inches. Easy-to-align rip fence positions on either side of blade... rips up to 14½ inches wide on left side, up to 13½ inches wide on right side. See-thru blade guard. Spreader helps prevent blade binding. Anti-kickback pawls. Combination Dado/Molding Head insert (9 GT 29933) for using 7-inch diameter dado or molding head sets sold on page 110... see index for additional accessories you can use with this saw.

TABLE: Cast aluminum... measures 17x20 inches.

EXTENSIONS: Two included. Solid formed steel type... each measures 10x20 inches. Attach on both sides of saw table. Attaching hardware included.

LEGS: Steel. Position saw at proper working height. Rubber padded leveling feet adjust to uneven or sloping floors. Caster set for legs sold at right.

MOTOR: Direct-drive induction motor develops 1.6 HP... gives direct power transmission to blade. Capacitor start with permanently lubricated ball bearings.

ELECTRICAL INFORMATION: Pull-on/push-off power switch with removable locking key and receptacle for connecting motor. Uses 120-volt, 60-Hertz, AC. 1050 full load input watts. With 6-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: See warranty below.
9 GT 24192N—Shipping weight 92 pounds... \$159.99

FULL ONE-YEAR WARRANTY ON CRAFTSMAN STATIONARY POWER TOOLS:

If, within one year from date of purchase, any CRAFTSMAN Stationary Power Tool fails due to a defect in material or workmanship, we will repair it free of charge. This warranty service is available by simply contacting any Sears store or service center in the U.S.

Caster Set.

Fits legs included in table saw outfit at left. Lets you roll saw to storage area when not in use. Attach out of way on inside of legs. Front 2½-inch diameter casters swivel... have "T" handles to raise or lower legs and make saw stationary for use. Rear 3-inch diameter casters are rigid. Plastic wheels in steel frame.

ORDER INFO: Set of 4. Wt. 6 lbs. 5 oz.
9 GT 22209... Set \$19.50



Caster set for table saw outfit above.

F7495-COMPBK LAEGJD: RF9-2396

SEARS, ROEBUCK AND CO.